

Professional,
practical
and solid.

Planning
and
technique



BETTE

Innovative solutions for bathroom design and installation



We look forward to your product, and we will be with you throughout - from the planning and realisation to beyond.

Download product details:

- CAD files in 2D and 3D
- BIM data
- Dimensional drawings
- Care instructions
- Technical data sheets
- Cutting templates

Planning safety from a single source.

We have been making high-quality architectural bathroom products in glazed titanium steel here in Delbrück (East-Westphalia) since 1952. Our special claim is the perfect connection of showers, baths and washbasins to the building. We offer a variety of solution for any planning situation. They range from the classic installation aids to pre-fabricated „plug-and-play“ modules. This brochure will give you a complete overview of all the technical Bette products and precise information for the planning and realisation.

As the experts in flush-to-floor showers, we have developed a series of innovative solutions for installations to industry standards in recent years. The required elements have been minimised; some are pre-fabricated, and perfectly designed to match each other. Installation, seal and sound insulation from a single source. This ensures that the sequences are all simple, quickly executed and run smoothly. They will save time, money and complex maintenance work.

All of our technical products are suitable for a wide range of installations, and we'd like to tell you more about them in this brochure.


Thilo C. Pahl
Managing Partner



The quick and easy route to your optimum installation.

Planning the shower area	Shower installation from a single source. Overview of our showers, installation system, assembly options, sound insulation and sealing variants, and drainage options.	<u>6-11</u>
Assembly aids	Installation systems and set-up aids for the speedy and unproblematic installation of showers and baths.	<u>12-51</u>
Installation Box Easy Connect	The plug-and-play solution for the safe connection and sealing to industry standards of shower trays and baths.	<u>52-55</u>
Seals	Reliable protection against moisture damage on floors and walls, compliant with standard DIN 18534.	<u>56-63</u>
Drainage	Waste and overflow fittings for baths and waste fittings for showers.	<u>64-79</u>
Anti-slip	Stability and anti-slip protection for showers and baths to industry standards.	<u>80-87</u>
BetteUpstand	BetteUpstand, the silicone-free wall connection, is the intelligent alternative to vulnerable maintenance joints.	<u>88-99</u>
Glazed titanium-steel and colours	Discover the characteristics and design options offered by our material glazed titanium steel.	<u>100-111</u>
Product overview	All our baths, shower areas, shower trays and washstands at a glance.	<u>112-125</u>



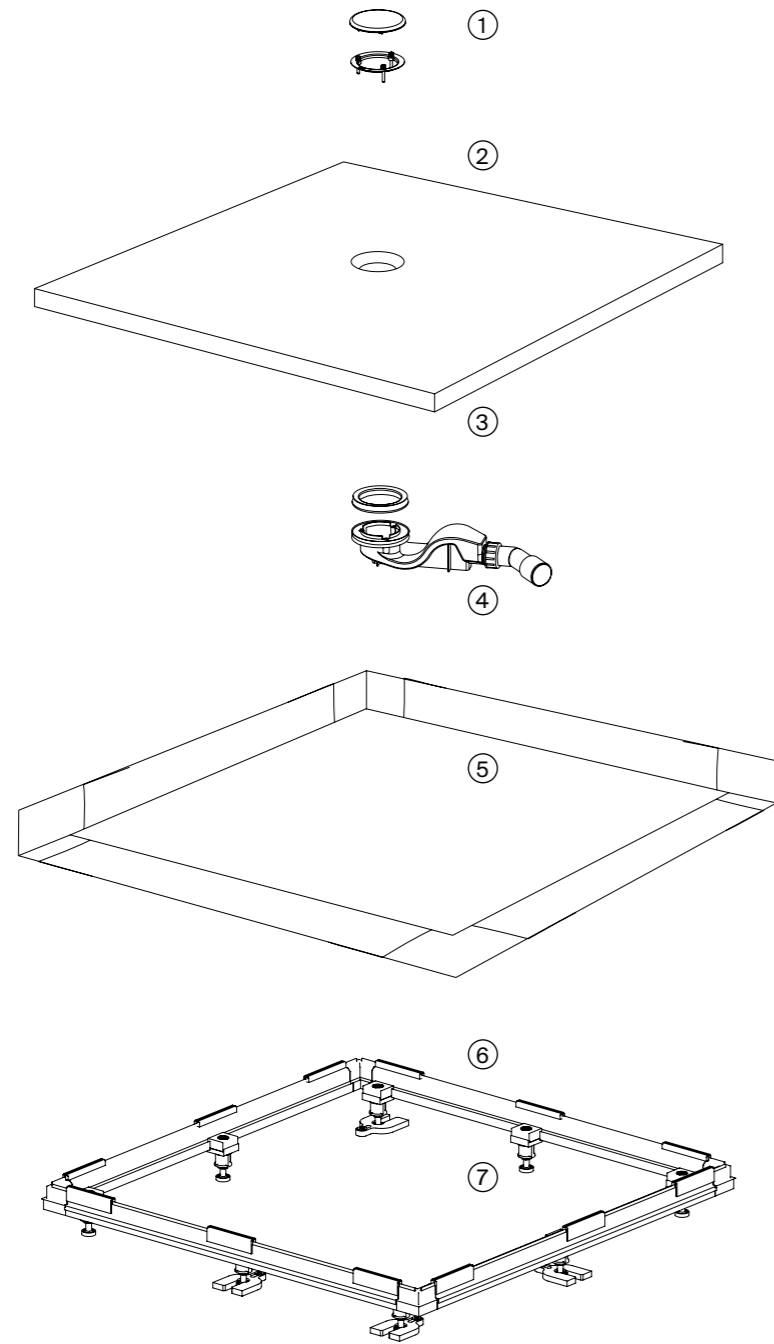










Planning the shower area



Bette shower areas and shower trays in glazed titanium steel are the long-lasting, hygienic solution for any bathroom. Our technical products are perfectly designed to match the showers, ensuring a reliable connection to the building and simplifying the planning of the entire shower area. Your benefits: seals to industry standards, a high level of sound insulation and safe water drainage combined with the easiest possible installation.










Our Universal installation system, for instance, is particularly versatile and variable. The installation of areas and shower trays, whether flush-to-floor, almost flush-to-floor or raised on a tiled plinth, is quick and accurate with this adjustable installation set. The sealing system that is included in the delivery ensures a permanent and safe seal to building regulation DIN 18534-1. The matching drainage systems with a high output ensure that large quantities of water drain away in the shortest time - even from flush-to-floor showers.

1. Glazed waste cover
2. Surface:
Colour, anti-slip, easy-care
3. Precise corner radii
4. Drainage capacity,
water seal depth, installation height
5. Sealed against the wall and floor
6. Installation aid
7. Sound insulation / height adjustment









		Installation			
		Flush-to-floor installation	Raised installation		
					
	Installation System Universal	x	x	x	x
	Installation System Basic	x	x	x	x
	Foot-System	x	x	x	x
	Minimum Support		x		
	Installation System Universal	x	x	x	x
	Installation System Basic	x	x	x	x
	Foot-System	x	x	x	x
	Minimum Support		x		
	Installation System Universal	x	x	x	x
	Installation System Basic	x	x	x	x
	Foot-System	x	x	x	x
	Minimum Support		x		
	polystyrene support ***		x		
	Foot-System			x	x
	polystyrene support ***		x		
	Installation System Flush-to-Floor BetteCaro	x			
	Foot-System		x	x	x
	Installation System Flush-to-Floor BetteCorner	x			
	Foot-System		x	x	x
	Installation System Flush-to-Floor BetteCaro	x			
	Foot-System BetteCaro		x	x	x
	Installation System Flush-to-Floor BetteCorner	x			
	Foot-System BetteCorner		x	x	x
	Foot-System	x	x	x	x

Installation system	Maximum adjustment range
Installation System Universal → Examples on pages 26–31	67 - 205 mm with separate extension set: 206 - 300 mm
Installation System Basic → Examples on pages 36–41	67 - 205 mm with separate extension set: 206 - 300 mm
Foot-System, Foot-System BetteCaro, Foot-System BetteCorner	80 - 200 mm With a separate spacer: 205 - 325 mm
Installation System Flush-to-Floor BetteCaro	70 - 180 mm
Installation System Flush-to-Floor BetteCorner	70 - 180 mm
Minimum Support → Examples on pages 18–21	-

* Figures on the screed on installation.
 ** As per the structural test report
 *** Only available for selected product dimensions, which are provided in the price list.

		Sound insulation		Seals				
		Sound insulation level 3 < 25 dB(A)		Tested waterproof seal included in the delivery	Optional: Seal cutting protection	Optional: Seal without cutting protection		
		As per VDI 4100	As per DIN 4109		Flush-to-Floor	Installation Box Easy Connect B57-0400	Sealing system for wooden floors B57-0375	Other sealing systems
	Installation System Universal	18 dB(A)**	20 dB(A)**	x				
	Installation System Basic	22 dB(A)**	24 dB(A)**		B57-0376	B57-0377	x	B57-0370
	Foot-System				B57-0376		x	B57-0370
	Minimum Support	15 dB(A)*	17 dB(A)*			x	x	B57-0371
	Installation System Universal			x			x	
	Installation System Basic				B57-0376	B57-0377	x	B57-0370
	Foot-System				B57-0376		x	B57-0370
	Minimum Support					x	x	B57-0371
	Installation System Universal	19 dB(A)**	22 dB(A)**	x			x	
	Installation System Basic	23 dB(A)**	25 dB(A)**		B57-0376	B57-0377	x	B57-0370
	Foot-System				B57-0376		x	B57-0370
	Minimum Support	16 dB(A)*	17 dB(A)*			x	x	B57-0371
	polystyrene support ***							
	Foot-System polystyrene support ***				B57-0376		x	B57-0370
	Installation System Flush-to-Floor BetteCaro							
	Foot-System				B57-0379			B57-0374
	Installation System Flush-to-Floor BetteCorner							
	Foot-System				B57-0378			B57-0373
	Installation System Flush-to-Floor BetteCaro							
	Foot-System BetteCaro				B57-0379			B57-0374
	Foot-System BetteCaro							B57-0373
	Installation System Flush-to-Floor BetteCorner							
	Foot-System BetteCorner				B57-0378			B57-0373
	Foot-System				B57-0376			B57-0370



Planning aid for drainage in flush-to-floor installations

Ablaufgarnituren							
		Structural height shower waste in mm	BetteFloor Side	BetteFloor	BetteUltra < 1000 mm	BetteUltra ≥ 1000 mm	BetteSupra
	BetteSolid 50 → Page 66	Structural height shower waste in mm	68	68	68	68	68
	B598- 0,6 l/s, water seal height 50 mm, as per DIN EN 274	Total structural height in mm incl. 5 mm air from finished floor level	118	118	113	123	153
	BetteSolid 30 → Page 66	Structural height shower waste in mm	48	48	48	48	48
	B597- 0,6 l/s, water seal height 30 mm	Total structural height in mm incl. 5 mm air from finished floor level	98	98	93	103	133
	BetteScope → Page 67	Structural height shower waste in mm	60	60	60	60	60
	B574- 0,85 l/s, water seal height 50 mm, as per DIN EN 274	Total structural height in mm incl. 5 mm air from finished floor level	110	110	105	115	145
	BetteDown → Page 67	Structural height shower waste in mm	80	80	80	80	80
	B573- 0,6 l/s, water seal height 50 mm, as per DIN EN 274	Total structural height in mm incl. 5 mm air from finished floor level	50	50	45	55	85



Assembly aids

We offer four well-designed installation aids for flush-to-floor, almost flush-to-floor and slightly raised installation of our shower areas and trays. The systems all have different adjustment ranges, and were developed for installation to industry standard with regard to waterproofness and sound insulation. The range is complemented by installation aids for baths.

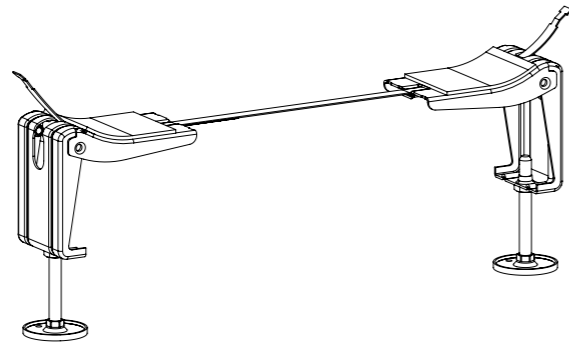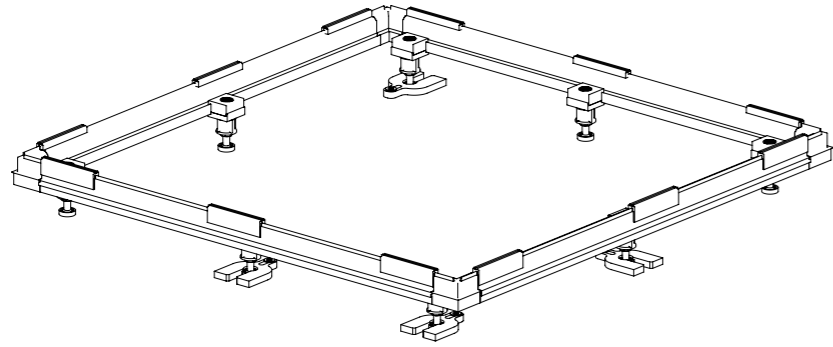

	Installation systems for showers
14-21	Shower with a Minimum Support
22-31	Installation System Universal
32-41	Installation System Basic
42-45	Foot system

	Installation aid for showers
46-47	Supporting leg

	Installation system for baths
48-51	Bath foot, universal



Shower with a minimum tray support Unwrap. Stick down. Done.

The installation is pre-assembled in the factory to shorten the installation time for the shower to a minimum. The compact unique consisting of shower and tray carrier can be combined with the Easy Connect installation box or the Bette sealing system, and glued directly to the screed or wooden floor. As well as saving time, Bette's practical solution also offers excellent sound insulation.

Advantages

- Ideal for new-builds and renovations
- Suitable for screed or wood floors
- Minimum installation height from 35 mm
- Pre-assembled at factory
- Can be combined with the Easy Connect installation box / sealing system

Included in the delivery

- Shower tray or shower area in glazed titanium steel, including noise-reducing anti-noise mats
- Tray carriers in expanded polystyrene (EPS) are pre-assembled at the works.

Certification

At only 17 dB(A), exceeds the higher requirements of sound insulation class 3, VDI 4100 (when installed on screed including insulation)



Noise level only
17dB(A) as per
DIN 4109
VDI 4100*2

*2 structural conditions
as per the test report

Can be combined
with:



BetteFloor



BetteFloor Side



BetteUltra

Installation
options:



Almost flush-to-floor

Links:

Installation film



→ lead.me/bbCjq3

Installation instruction



→ lead.me/bbCjtg

Topic Page




→ lead.me/bbCmFg

Certificates



→ lead.me/bbCmGY

Shower with a Minimum Support

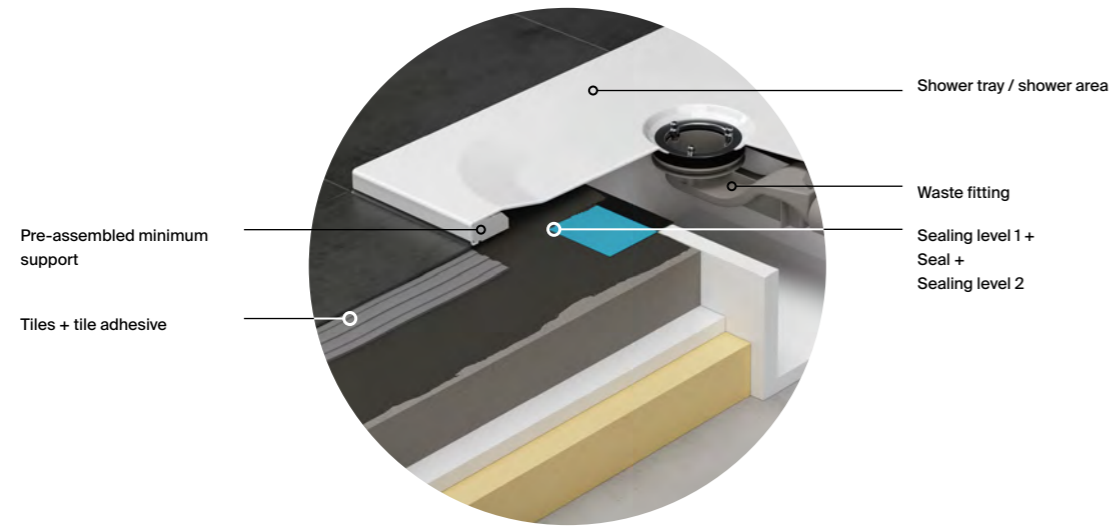

Installation steps for a shower with the Minimum Support

Installation film



→ [Lead.me/bbCjq3](https://lead.me/bbCjq3)

1. Prepare the base

- Install the Installation Box Easy Connect (available separately), integrate in the sealing level and connect the waste fitting



2. Prepare the carrier

- Apply the adhesive to the underside of the support in wavy lines



3. Position the carrier

- Place the carrier on the base and connect the waste fitting
- Put the tile separator strips in place




4. Tiling

- Apply the tile adhesive
- Lay the tiles
- Remove the tile separator strips



5. Finishing

- Load the shower with at least 50 kg
- Silicone
- Leave to set for 24 hours

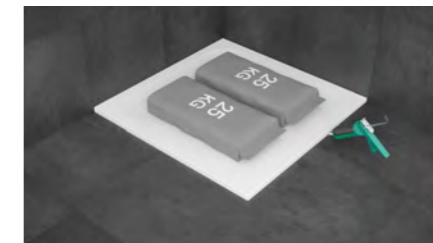

Installation options with the Minimum Support




Almost flush-to-floor



shower waste
BetteSolid 50
→ Page 66


BetteFloor

B598-
0,6 l/s,
water seal height 50
mm, as per DIN EN 274

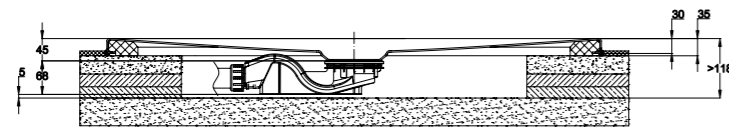


BetteSolid 30
→ Page 66

B597-
0,6 l/s,
water seal height 30
mm

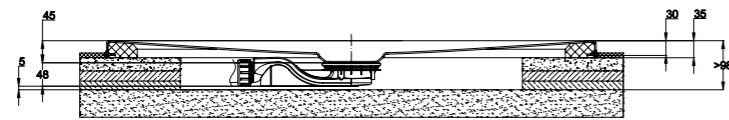


BetteScope
→ Page 67

B574-
0,85 l/s,
water seal height 50
mm, as per DIN EN 274

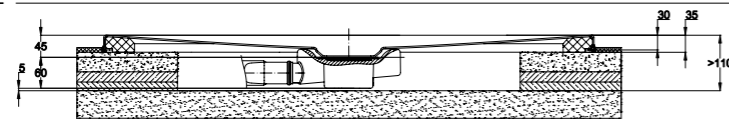

BetteDown
→ Page 67

B573-
0,6 l/s,
water seal height 50
mm, as per DIN EN 274

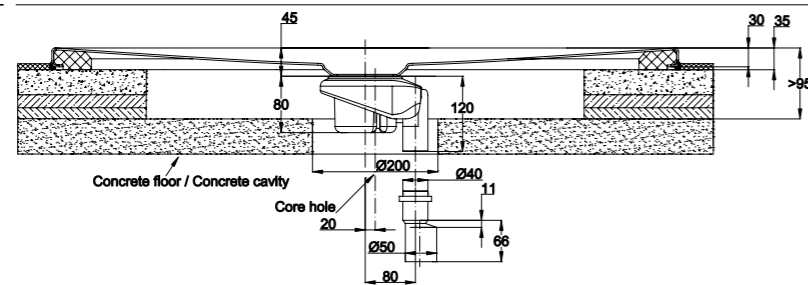


Almost flush-to-floor



shower waste
BetteSolid 50
→ Page 66


BetteFloor Side

B598-
0,6 l/s,
water seal height 50
mm, as per DIN EN 274

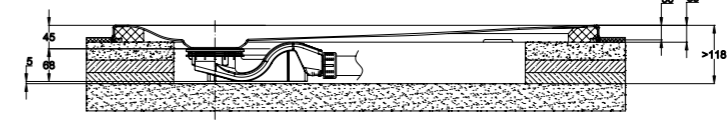


BetteSolid 30
→ Page 66

B597-
0,6 l/s,
water seal height 30
mm

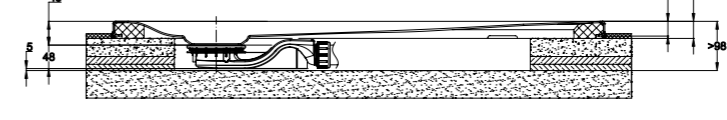


BetteScope
→ Page 67

B574-
0,85 l/s,
water seal height 50
mm, as per DIN EN 274

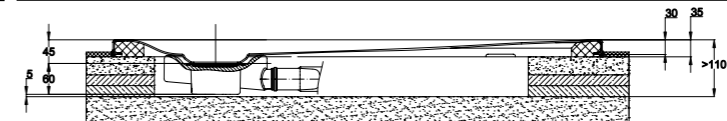

BetteDown
→ Page 67

B573-
0,6 l/s,
water seal height 50
mm, as per DIN EN 274

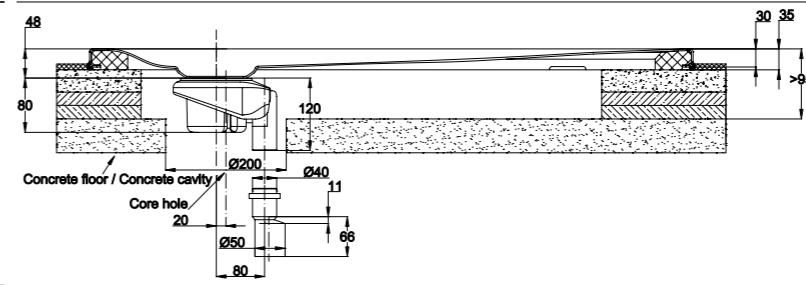

Installation options with the Minimum Support




Almost flush-to-floor



shower waste **BetteUltra ≤ 1000 mm**


BetteSolid 50
→ Page 66

B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274




BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm




BetteScope
→ Page 67

B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274



BetteDown
→ Page 67

B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274

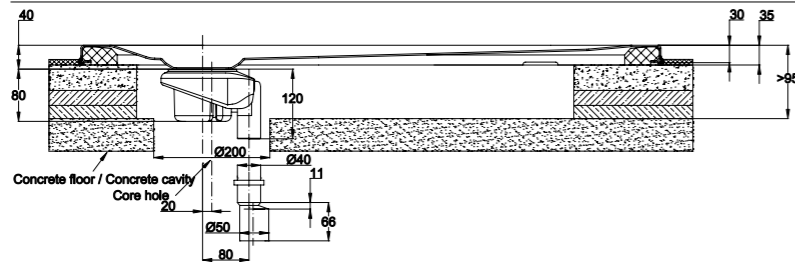


Almost flush-to-floor



shower waste **BetteUltra > 1000 mm**


BetteSolid 50
→ Page 66

B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274




BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm




BetteScope
→ Page 67

B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274



BetteDown
→ Page 67

B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274

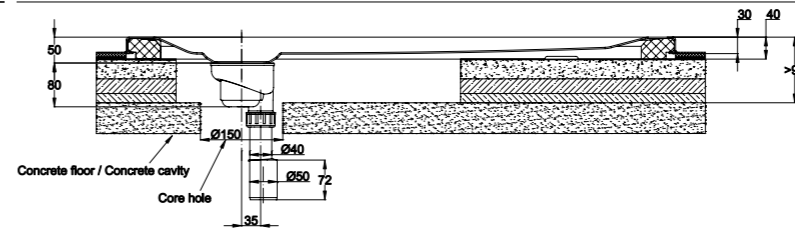

Installation System Universal

The system for any eventuality

The versatile system developed by Bette for the installation of shower areas and shower trays offers tremendous flexibility on installation. The showers can be installed flush-to-floor, almost flush-to-floor or raised on a tiled plinth. Due to the generous adjustment range of 67–205 mm, the system can easily be adjusted to structural conditions. Thanks to the sealing components that are included in the delivery, it offers maximum protection against moisture damage.

Advantages

- Safe and easy installation
- Flexible adjustment to structural conditions
- The sealing components that are included in the delivery offer maximum protection against moisture damage
- Easy to align from above
- Shower remains easily accessible for inspection tasks
- Formwork panels made of polypropylene
- High sound insulation - only 20 dB(A) as per DIN 4109
- Sound insulation level 3 as per VDI 4100

Information

The system is permanently accessible for inspection tasks. Cannot be combined with BetteUpstand.

With flush-to-floor installation using the Universal installation system, the installation frame is 5 mm bigger on all sides than the outer dimensions of the shower.

For different installation heights in the adjustment range 206 - 300 mm we offer an extension set installation system, part no. B57-0403, which must be ordered separately.

Included in the delivery

- Carrier frame profile
- Plug connector
- Sealing fleece
- Sealing corners
- Formwork panels
- Tiling aid
- Sliding profile
- Set of feet including spacers
- Foil adhesive
- Universal open-end wrench
- Allen key




Waterproof
ETAG 022
DIN 18534

DIN 18534 requires baths and shower trays to be specially sealed.
→ Page 57



Noise level only 20 dB(A)
as per DIN 4109*2

*2 structural conditions as per test report

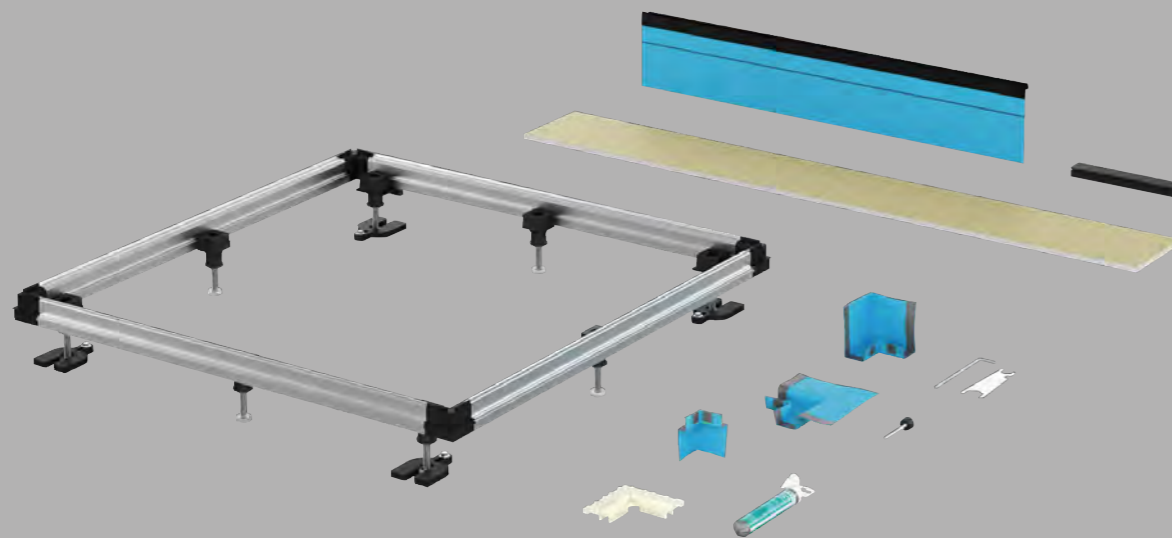

Adjustment range: 67–205 mm

Can be combined with:



BetteFloor



BetteFloor Side



BetteUltra

Installation options:



Flush-to-floor



Almost flush-to-floor



Raised on a tiled plinth

Links:

Installation film



→ lead.me/bbCjqD

Installation instruction



→ lead.me/bbCju1

Certificates



→ lead.me/bbCmGi

Installation steps

Installation System Universal



Installation film



→ [Lead.me/bbCjqD](https://lead.me/bbCjqD)

1. Assemble the frame

- Assemble the carrier frame profiles and plug connector and position the sliding profile

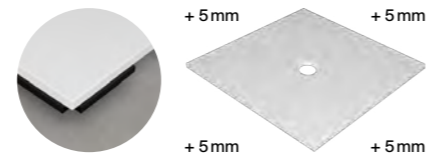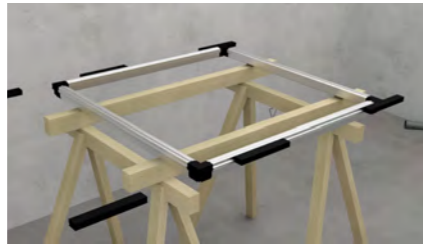


With flush-to-floor installation, the sliding profiles will protrude by 5 mm on all sides.

2. Attach feet

- Assemble the set of feet in the required combination
- Adjust the wall spacers

If your total installation height is between 206–300mm, an additional expansion set is required, which must be ordered separately.




3. Position the frame

- Place the system on the unfinished floor
- Use the tiling aid to check there is a sufficient gap from the wall. Adjust the wall spacers if necessary.
- Check the alignment with a spirit level. Adjust the feet if necessary.
- Connect the foot spacers to the unfinished floor (screw or glue)



4. Fit the formwork panels

- Trim the formwork panels to size and mark the height of the sliding profiles
- Attach the formwork panels and screw to the sliding profiles

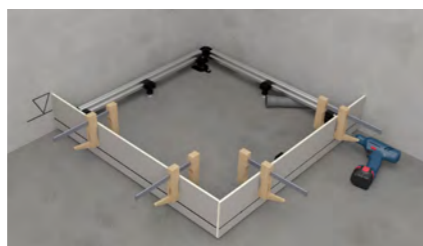


5. Prepare the base

- Mark the waste
- Fill in the screed
- Apply the first sealing level to the screed
- Trim the formwork panels to height
- Clean the frame
- Check the alignment with a spirit level




6. Connect the seal

- Fit the seal
- Work the seal into the compound seal

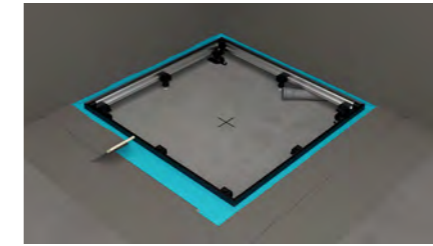


7. Tiling

- Apply tile adhesive to the walls and floor
- Position the tiling aid and lay the tiles
- Lay the tiles
- Measure the recess
- Clean the frame

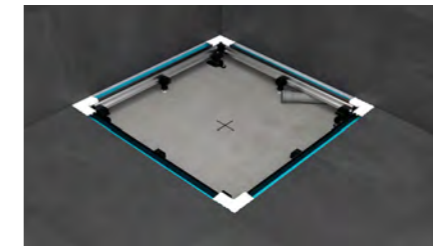


8. Preparing the final installation

- Position the waste fitting
- Seal the corners
- Treat the installation system with silicone spray

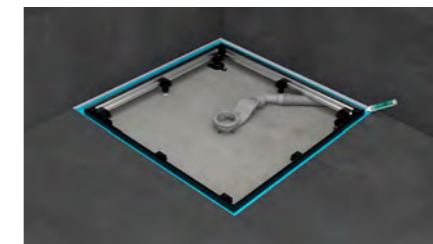

9. Insert the shower

- Clean the tray rim
- Insert the tray
- Connect the waste fitting
- Place on weight and silicone the rims
- Leave to set for 24 hours

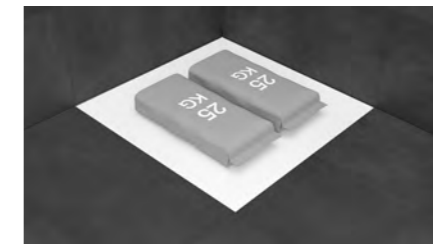

Installation options with the Installation System Universal




Flush-to-Floor

shower waste
BetteSolid 50
 → Page 66
 B598-
 0,6 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteSolid 30
 → Page 66
 B597-
 0,6 l/s, with side outlet,
 water seal height 30
 mm

BetteScope
 → Page 67
 B574-
 0,85 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteDown
 → Page 67
 B573-
 0,6 l/s, with vertical
 outlet, water seal height
 50 mm, as per DIN
 EN 274

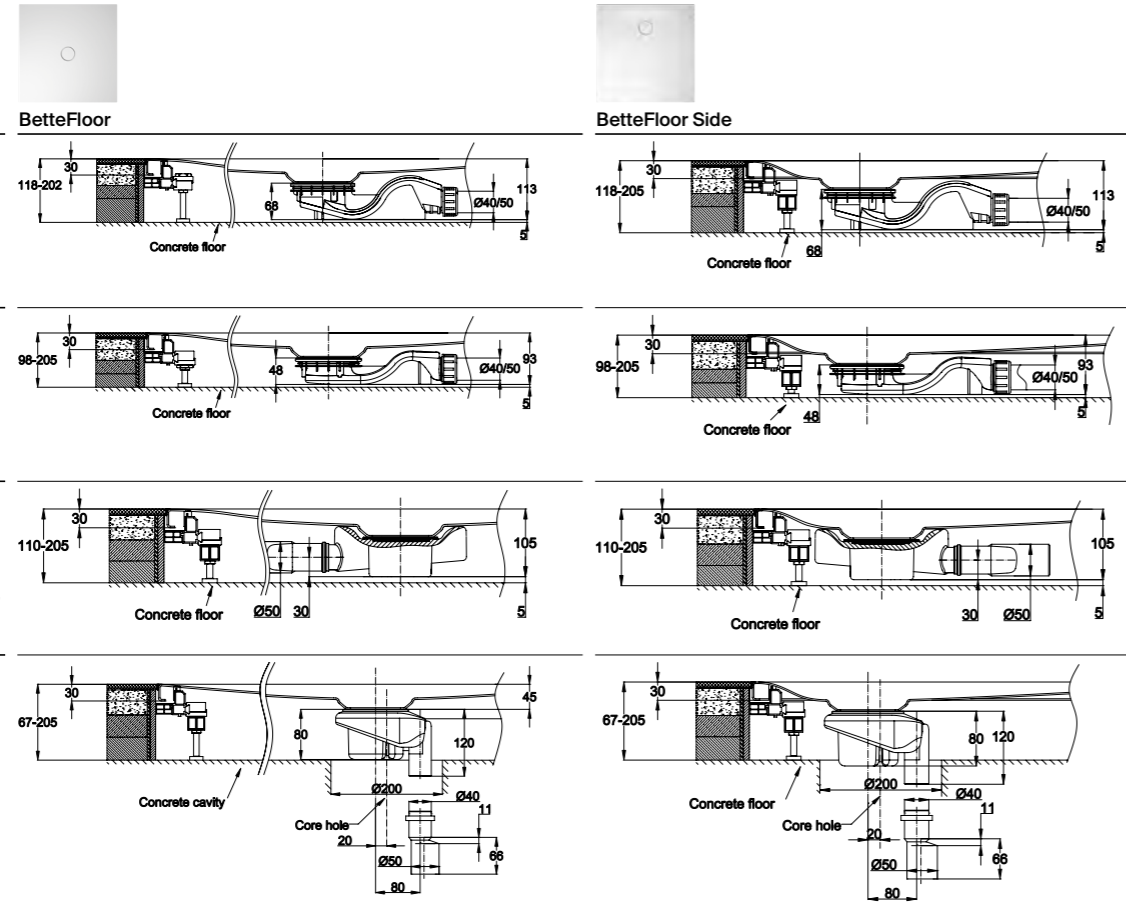


Flush-to-Floor

shower waste
BetteSolid 50
 → Page 66
 B598-
 0,6 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteSolid 30
 → Page 66
 B597-
 0,6 l/s, with side outlet,
 water seal height 30
 mm

BetteScope
 → Page 67
 B574-
 0,85 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteDown
 → Page 67
 B573-
 0,6 l/s, with vertical
 outlet, water seal height
 50 mm, as per DIN
 EN 274

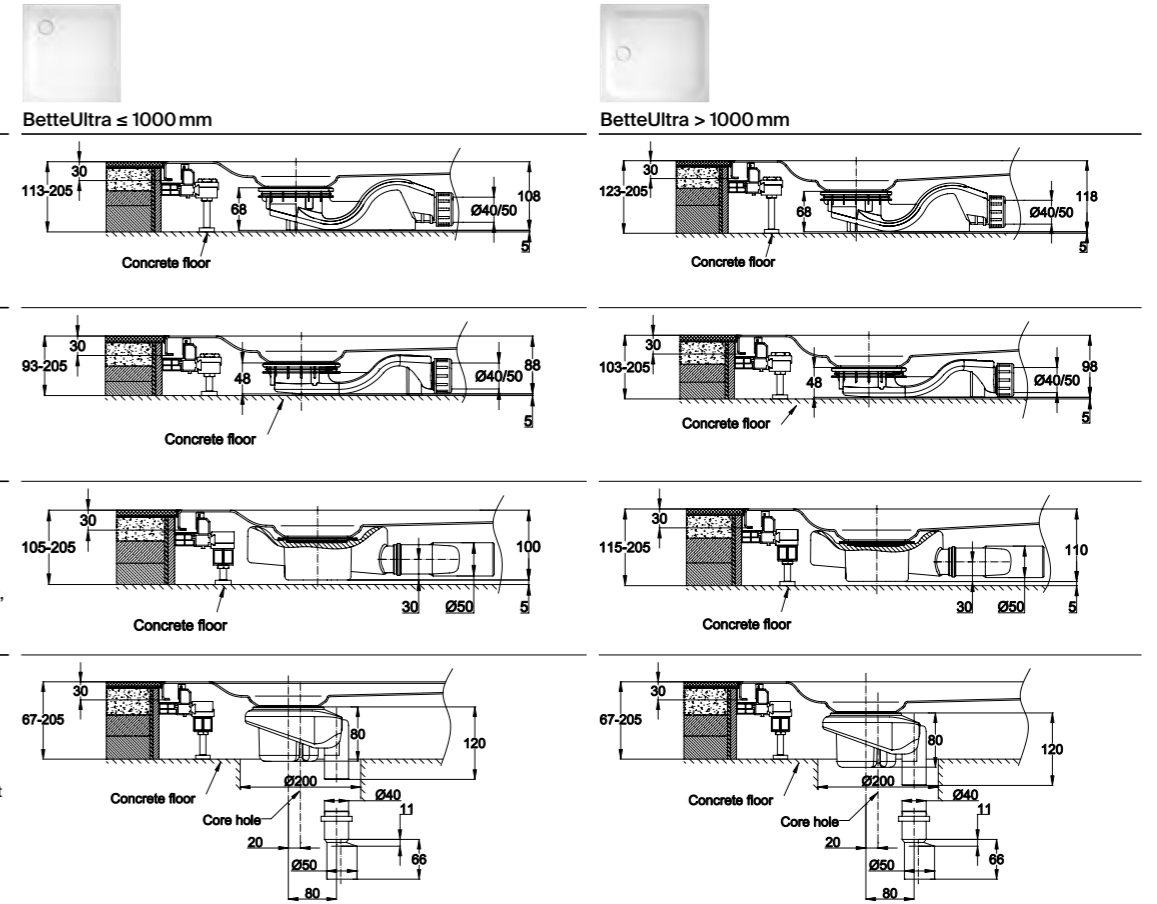

Installation options with the Installation System Universal



Almost flush-to-floor

shower waste
BetteSolid 50
→ Page 66

B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm

BetteScope
→ Page 67


B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

BetteDown
→ Page 67










B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274



BetteFloor



BetteFloor Side



Almost flush-to-floor

shower waste
BetteSolid 50
→ Page 66

B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm

BetteScope
→ Page 67


B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

BetteDown
→ Page 67










B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274



BetteUltra ≤ 1000 mm



BetteUltra > 1000 mm



Installation options with the Installation System Universal



Raised on a tiled plinth

	BetteFloor	BetteFloor Side
shower waste BetteSolid 50 → Page 66 B598- 0,6 l/s, with side outlet, water seal height 50 mm, as per DIN EN 274		
BetteSolid 30 → Page 66 B597- 0,6 l/s, with side outlet, water seal height 30 mm		
BetteScope → Page 67 B574- 0,85 l/s, with side outlet, water seal height 50 mm, as per DIN EN 274		
BetteDown → Page 67 B573- 0,6 l/s, with vertical outlet, water seal height 50 mm, as per DIN EN 274		



Raised on a tiled plinth

	BetteUltra ≤ 1000 mm	BetteUltra > 1000 mm
shower waste BetteSolid 50 → Page 66 B598- 0,6 l/s, with side outlet, water seal height 50 mm, as per DIN EN 274		
BetteSolid 30 → Page 66 B597- 0,6 l/s, with side outlet, water seal height 30 mm		
BetteScope → Page 67 B574- 0,85 l/s, with side outlet, water seal height 50 mm, as per DIN EN 274		
BetteDown → Page 67 B573- 0,6 l/s, with vertical outlet, water seal height 50 mm, as per DIN EN 274		

Installation System Basic The perfect base



Noise level only
24 dB(A)
as per DIN 4109*2

*2 structural conditions as
per test report

The versatile, tried-and-tested system is suitable for the installation of flush-to-floor shower areas and trays 25 mm and 35 mm deep. The showers can be installed flush-to-floor, almost flush-to-floor or raised on a tiled plinth. Due to the generous adjustment range of 67 – 205 mm, the system can easily be adjusted to structural conditions. The system can also be used for the easy installation of shower trays and shower areas (BetteFloor Side) with BetteUpstand.

Advantages

- Safe and easy installation
- Can be combined with BetteUpstand
- Flexible adjustment to structural situations
- Adjustment range from 67 – 205 mm
- Easy to align from above
- High sound insulation - only 24 dB(A) as per DIN 4109

Information

- Can optionally be combined with sealing system
- Can be combined with BetteUpstand

For different installation heights in the adjustment range 206 – 300 mm we offer an extension set installation system, part no. B57-0403, which must be ordered separately.

Included in the delivery

- Carrier frame profile
- Plug connector
- Tiling aid
- Sliding profile
- Set of feet including spacers
- Rubber supports pre-fitted at the factory
- Universal open-end wrench
- Allen key



Adjustment range: 67 – 205 mm

Can be combined
with:



BetteFloor



BetteFloor Side



BetteUltra



BetteUpstand


Installation
options:



Flush-to-floor



Almost flush-to-floor



Raised on a tiled plinth

Links:

Installation film



→ i.lead.me/bbK7wC

Installation instructions



→ i.lead.me/bbCjul

Certificates



→ i.lead.me/bbCmH0

Installation steps Installation System Basic

Installation film



→ [Lead.me/bbk7wC](https://lead.me/bbk7wC)

1. Assemble the frame


- Measure the height of the screed recess (x2)
- Assemble the carrier frame profiles and plug connectors



2. Determine the installation height

Based on:
 $x1 = x2 + \text{tile adhesive} + \text{floor covering}$
 $x2 = \text{height screed recess}$

Based on the installation height:
 Total height of the shower tray
 + total height of the set
 + 5 mm gap
 = x1

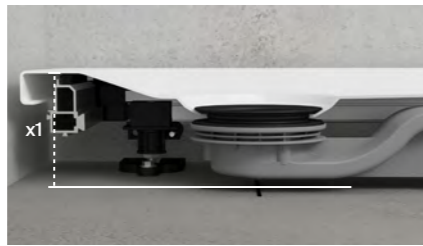

3. Attach feet

- Assemble foot sets in the required combination
 - Fit the wall spacers
- If your total installation height is between 206–300mm, an additional expansion set is required, which must be ordered separately.



3. Position the frame

- Place the system on the unfinished floor
- Adjust the wall spacers
- Use the tiling aid to check whether there is sufficient space to the wall
- Adjust the wall spacers if necessary
- Check the alignment with a spirit level
- Adjust the feet if necessary




4. Prepare the frame

- Position the foot spacers
- Connect the foot spacers to the unfinished floor (screw or glue)
- Mark the waste
- Position the waste fitting
- Remove the tiling aid




5. Prepare the base

- Apply the first sealing level to the floor and screed

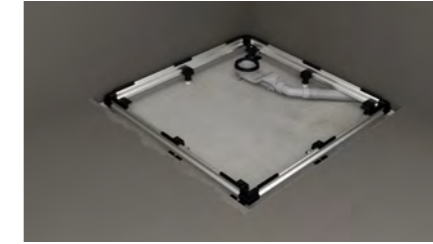

6. Position the shower

- Position the shower with the pre-assembled seal (optionally available)
- Connect the waste fitting
- Check the alignment with a spirit level

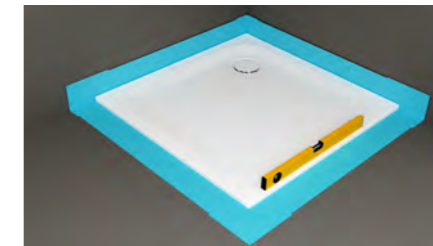


7. Connect the shower tray

- Work the sealing fleece into the second sealing level
- Position the tile separator strips (optionally available)
- Apply tile adhesive to wall and floor
- Lay the tiles
- Remove the tile separator strips



8. Finishing

- Place on weight and silicone the rims
- Leave to set for 24 hours

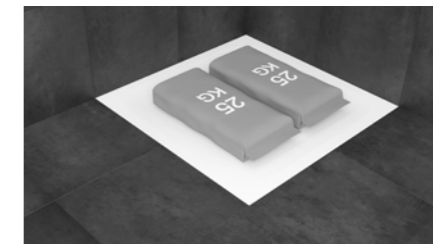

Installation options with the Installation System Basic



Flush-to-Floor


shower waste




BetteFloor

BetteSolid 50
→ Page 66

B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

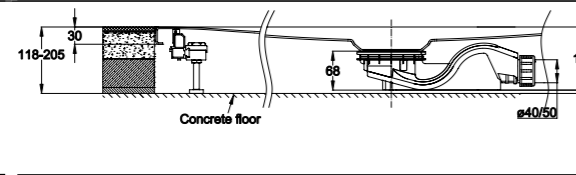


BetteFloor Side

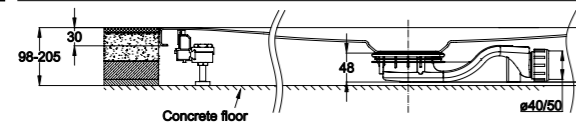



BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm

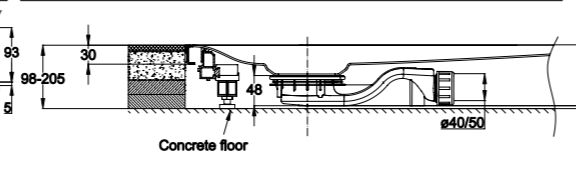



BetteScope
→ Page 67

B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

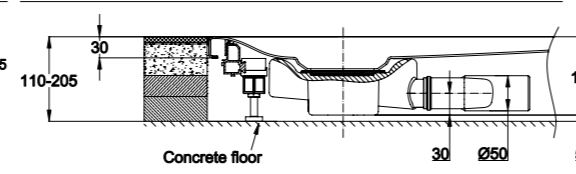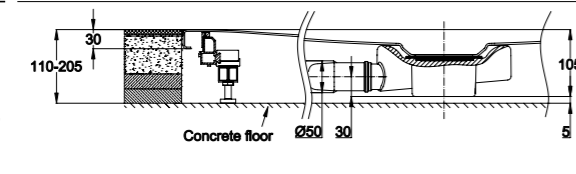

BetteDown
→ Page 67

B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274

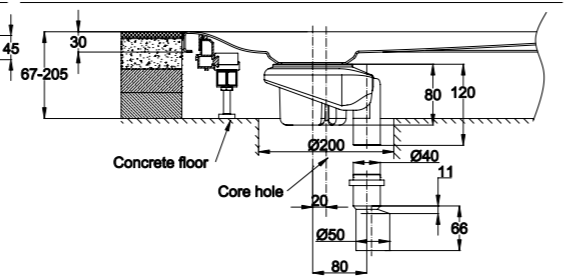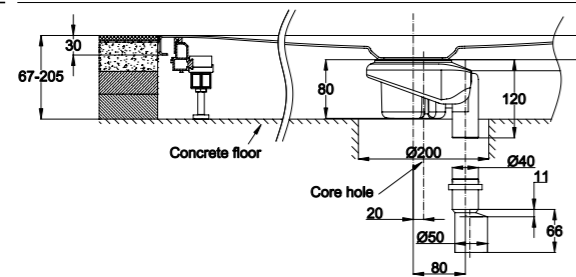

Flush-to-Floor


shower waste



BetteUltra ≤ 1000 mm

BetteSolid 50
→ Page 66



B598-
0,6 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

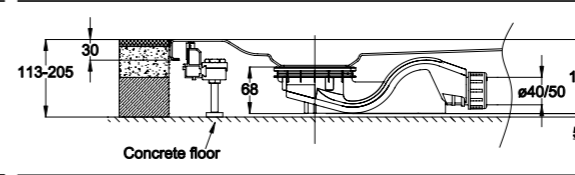

BetteUltra > 1000 mm



BetteSolid 30
→ Page 66

B597-
0,6 l/s, with side outlet,
water seal height 30
mm

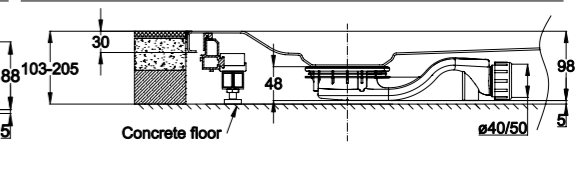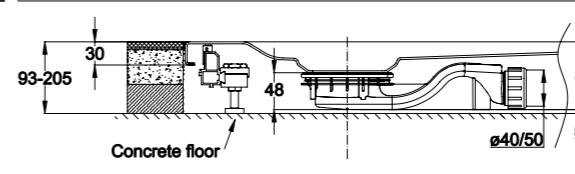



BetteScope
→ Page 67

B574-
0,85 l/s, with side outlet,
water seal height 50
mm, as per DIN EN 274

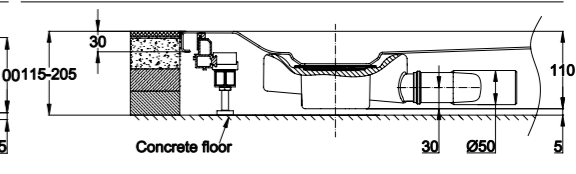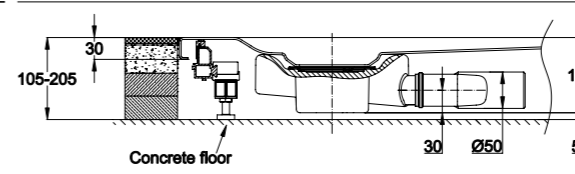

BetteDown
→ Page 67

B573-
0,6 l/s, with vertical
outlet, water seal height
50 mm, as per DIN
EN 274

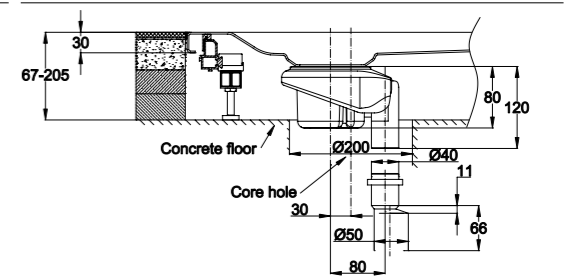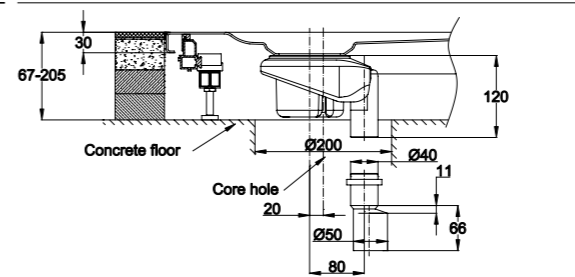

Installation options with the Installation System Basic



Almost flush-to-floor

shower waste
BetteSolid 50
 → Page 66

B598-
 0,6 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteSolid 30
 → Page 66


B597-
 0,6 l/s, with side outlet,
 water seal height 30
 mm

BetteScope
 → Page 67

B574-
 0,85 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteDown
 → Page 67

B573-
 0,6 l/s, with vertical
 outlet, water seal height
 50 mm, as per DIN
 EN 274

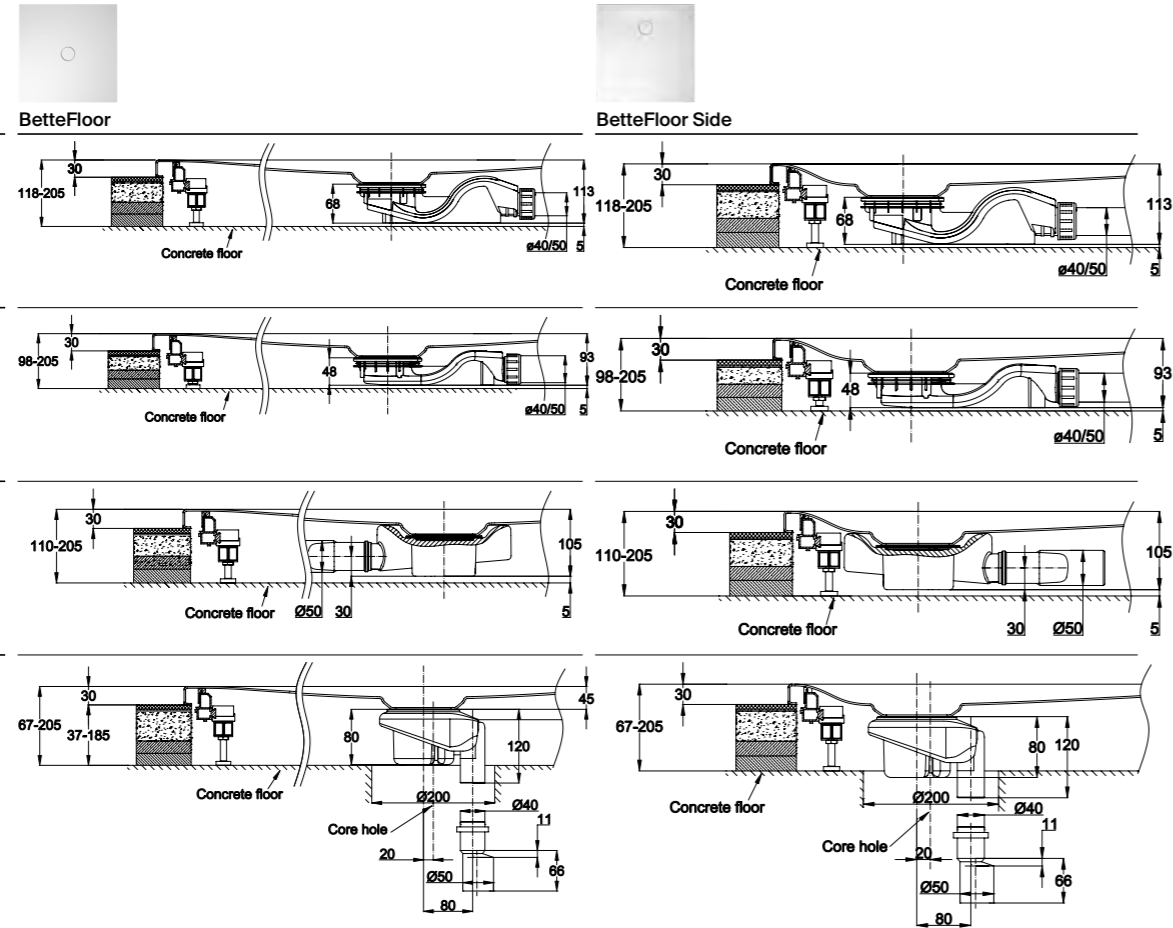

Almost flush-to-floor

shower waste
BetteSolid 50
 → Page 66

B598-
 0,6 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteSolid 30
 → Page 66


B597-
 0,6 l/s, with side outlet,
 water seal height 30
 mm

BetteScope
 → Page 67


B574-
 0,85 l/s, with side outlet,
 water seal height 50
 mm, as per DIN EN 274

BetteDown
 → Page 67



B573-
 0,6 l/s, with vertical
 outlet, water seal height
 50 mm, as per DIN
 EN 274

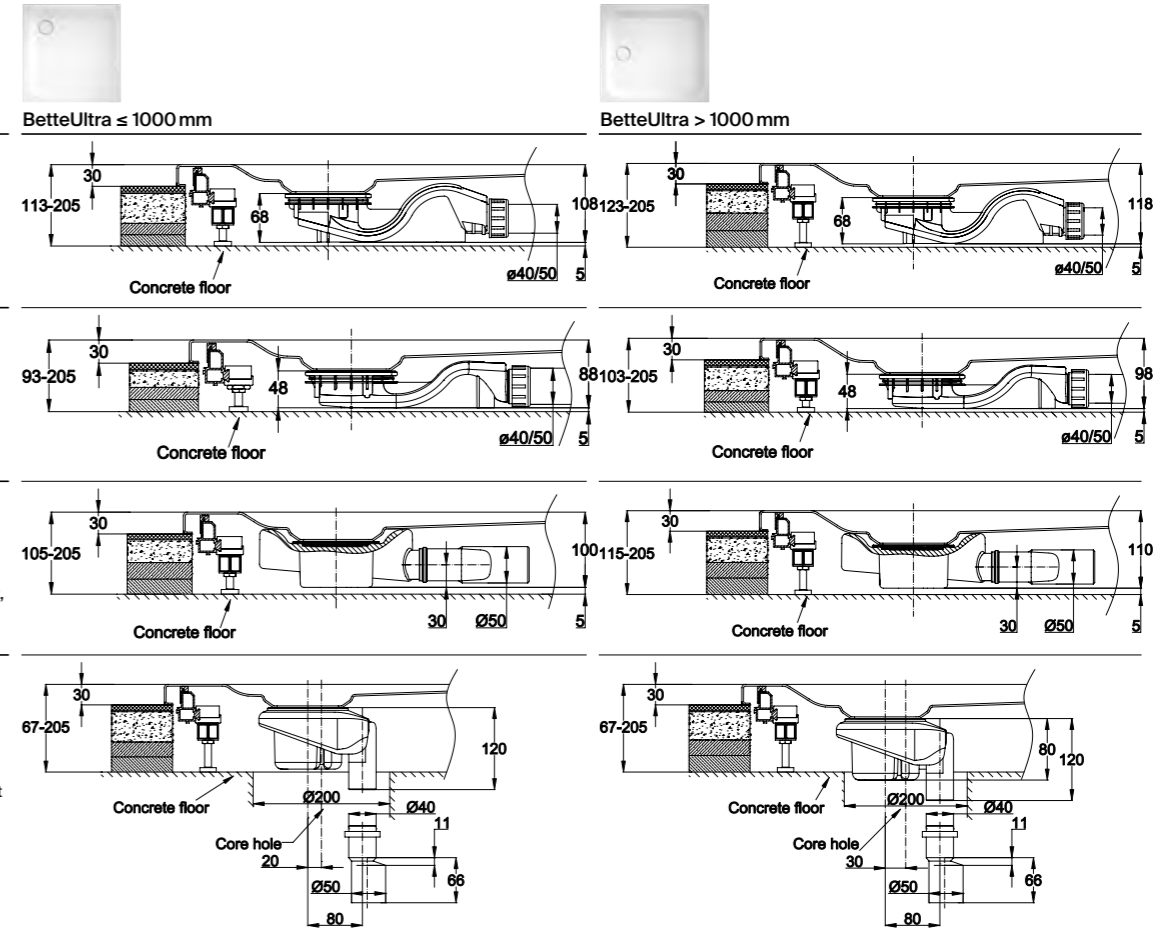


Installation options with the Installation System Basic




Raised on a tiled plinth

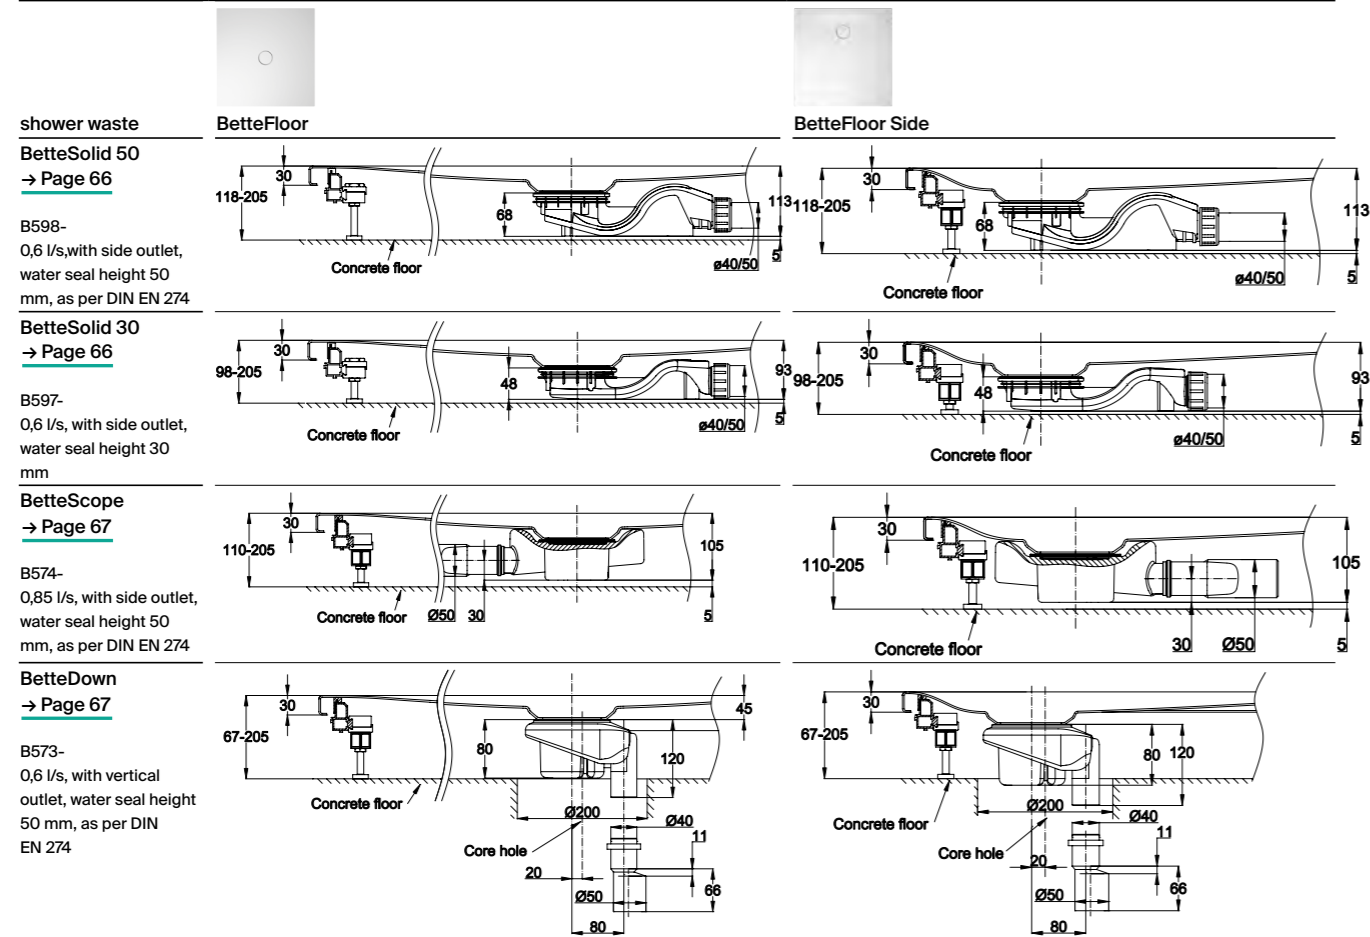

Raised on a tiled plinth

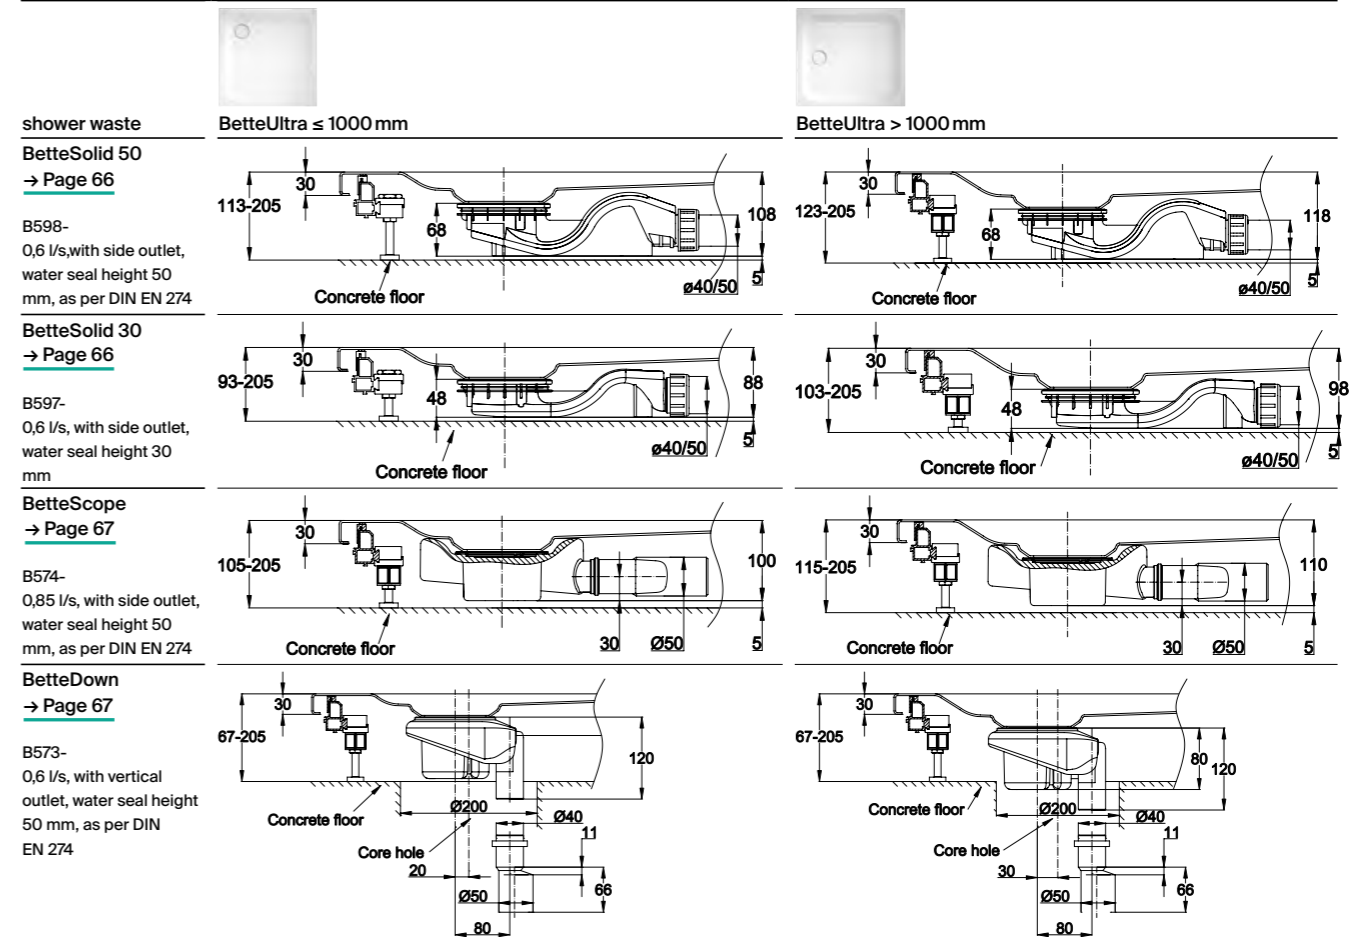

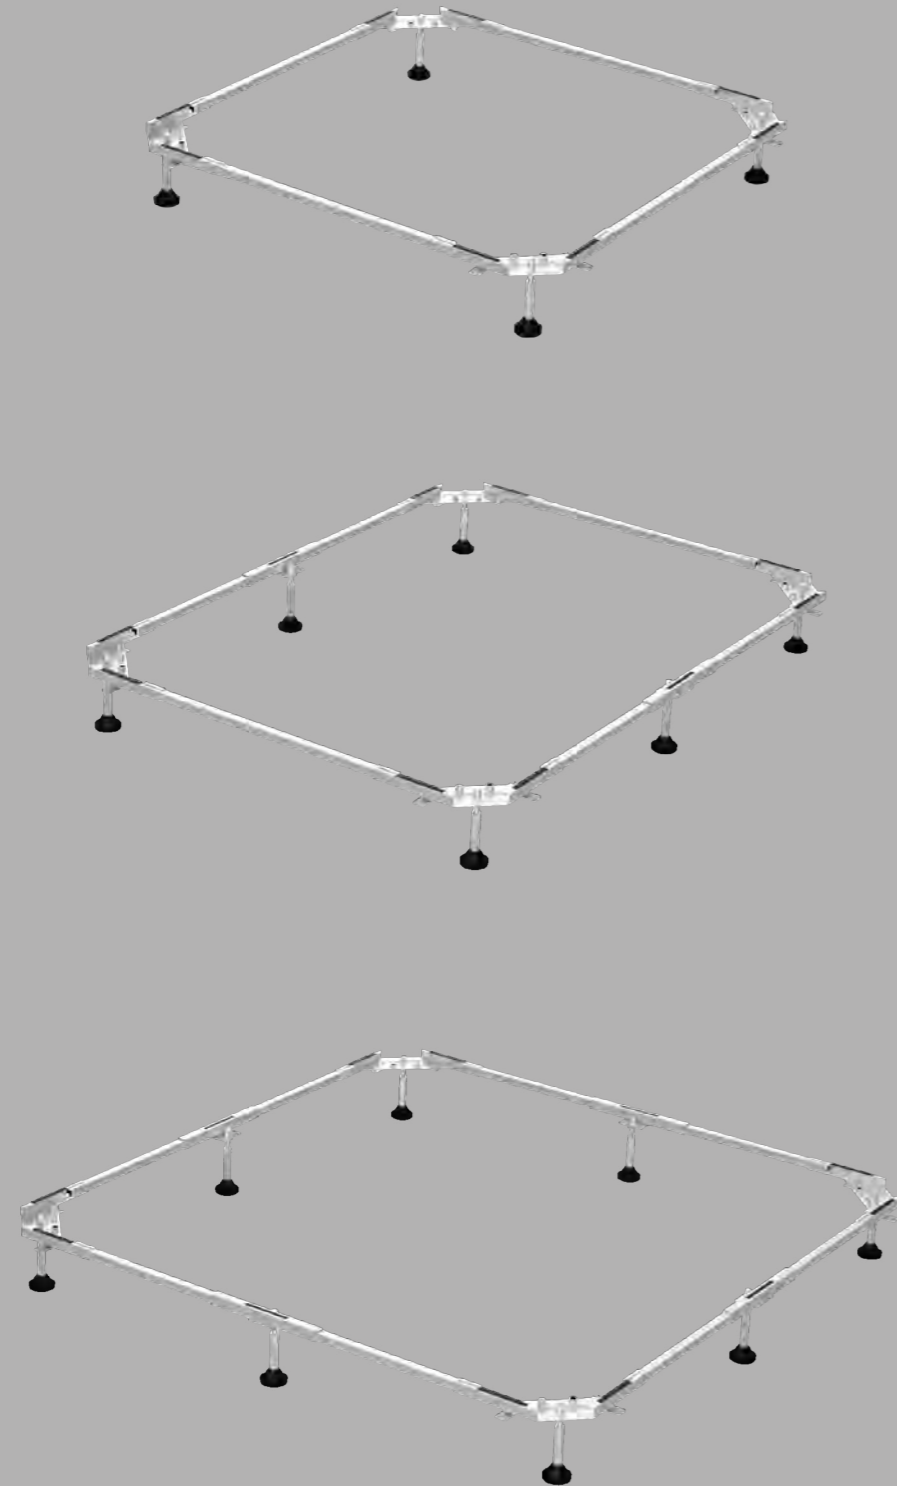

Foot system

For quick and inexpensive height adjustments

The foot system guarantees fast, safe and inexpensive height adjustments when installing shower trays. The height-adjustable feet are screwed into a frame that is braced under the bath rim. This distributes the load over the entire frame, rather than locally. There is no need to underpin the shower tray.

Information

- For different installation heights over a range of 205 - 325 mm we offer separate spacers, item no. B50-0005, that need to be ordered separately.
- Can be combined with BetteUpstand

Included in the delivery

- Square tubes
- Corner connectors
- Feet
- Rubber supports pre-assembled at the factory

Adjustment range: 80 - 200 mm

Can be combined with:



BetteFloor



BetteFloor Side



BetteUltra



BetteSupra



BetteQuinta




BetteUpstand

Installation options:



Almost flush-to-floor



Raised on a tiled plinth

Links:

Installation film



→ lead.me/bbCjqX

Installation instructions



→ lead.me/bbCjuX

Installation steps for the foot system


Installation film



[-> I.lead.me/bbCjqX](https://lead.me/bbCjqX)

1. Preparations

- Measure the total installation height of the shower tray

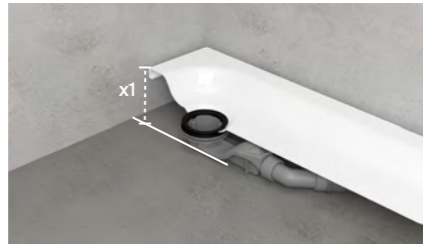


Total height of the shower tray
+ total height of the set
+ 5 mm gap
= x1

If the total installation height is between 205 - 325 mm, you will need additional spacers. These are to be ordered separately.


2. Attach feet

- Combine the feet as desired and fit to the corner connectors

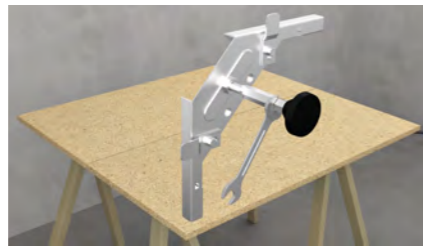

3. Assemble the frame

- Slide the connectors onto the square tube until they come to a stop and place together on the underside of the shower
- Slide the corner connectors to the inside
- Countercheck the required total installation height once more

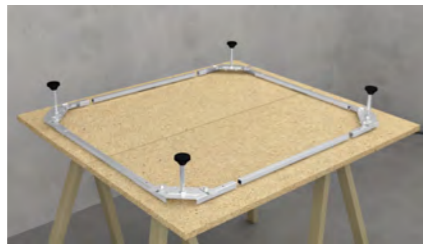

4. Secure the frame

- Turn the tabs on the corner connectors to the outside under the edge of the shower tray and secure with an Allen key.




5. Position the frame

- Position the waste fitting
- Place the frame on the floor after applying the first sealing level
- Check the alignment with a spirit level
- Check the required total installation height once more




6. Seal

- Work the seal (optionally available) into the compound seal and tile
- Place tile separator strips (optionally available) on the shower
- Connect the waste fitting
- Tile
- Remove the tile separator strips

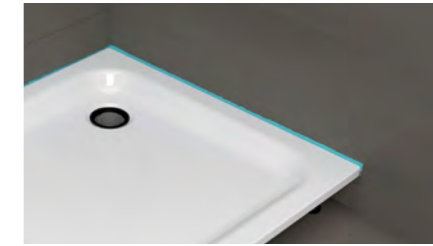


7. Finishing

- Place on weight and silicone the rims
- Leave to set for 24 hours

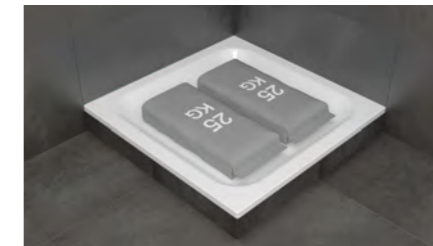


Supporting leg


Height-adjustable foot to provide additional support for BetteFloor and BetteFloor Side shower areas and BetteUltra shower trays. Fitted during installation. The adjustment range under the trays is 90 – 150 mm. We offer an under-foaming set if support is required at a later stage.




Examples of applications:




Shower tray
< 1000 mm: 1 pce.




Shower tray
1000 – 1400 mm: 1 pce.




Shower tray
1500 – 1800 mm: 2 pce.




BetteFloor:
> 1500 mm



BetteFloor:
1500 – 1800 mm



BetteFloor Side
> 1500 mm: 1 pce.



BetteFloor Side
1500 – 1800 mm: 2 pce.

Adjustment range: 90 – 150 mm under the bath

Can be combined with:



BetteFloor



BetteFloor Side



BetteUltra

Links:

Installation film



→ i.ead.me/bbCjr4

Installation instructions




→ i.ead.me/bbCjuw

Certificates




→ i.ead.me/bbCmHH

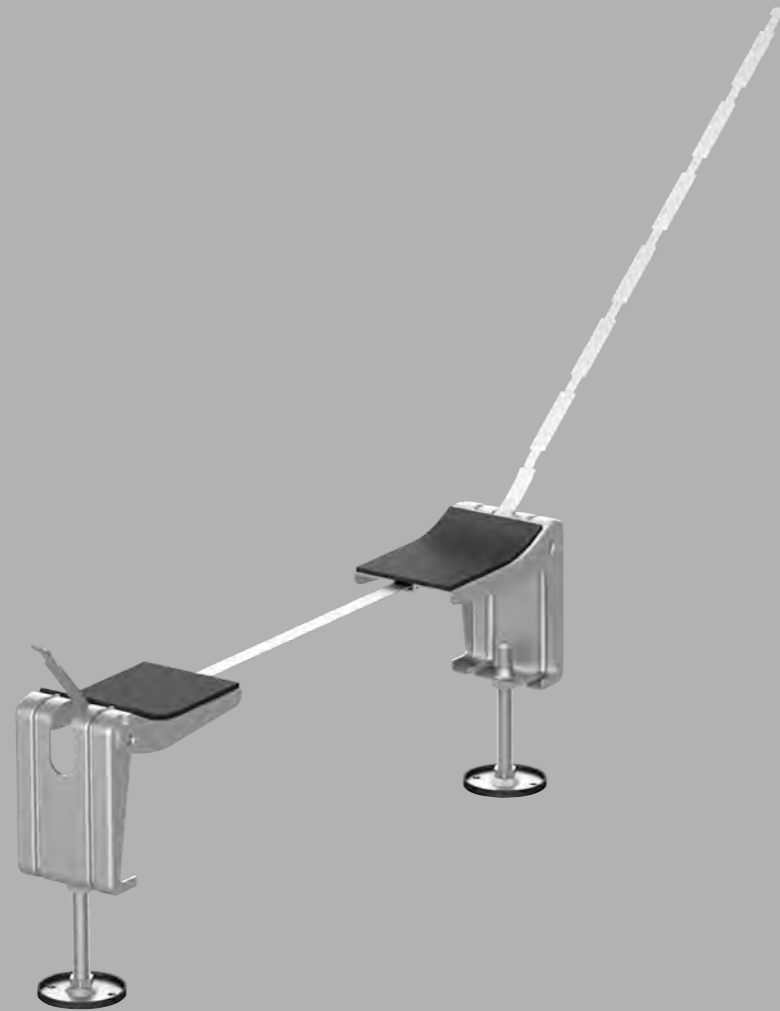

Bath foot, universal

Installation aid with individual height adjustment for safe and easy installation of baths. An integrated torque lock ensures that the foot is not over-tightened to the fixation tabs on the bath. This protects against damage and provides mounting safety.

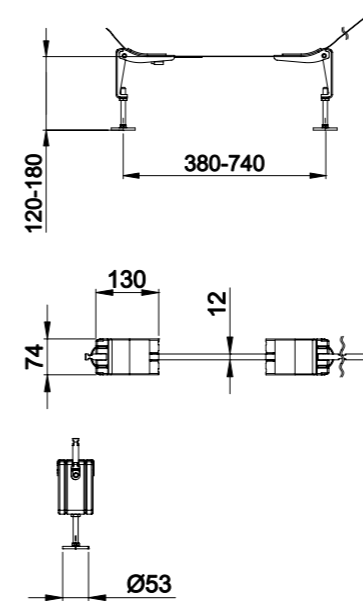

Information

- Bath foot for parallel bath base geometries.
- For direct installation on the bath base. Connection to the external bath base geometry provides the optimum stability
- The feet are height-adjustable and, when used in combination with the sound insulation set B57-0100, are sound insulating to DIN 4109/A1

Included in the delivery

- Set of two foot bridges

Can be combined with

- BetteBambino
- BetteClassic
- BetteComodo
- BetteComodo with overflow on the side
- BetteDuett
- BetteDuo
- BetteForm
- BetteFree
- BetteLoft
- BetteLuna
- BetteLux
- BetteLux Oval
- BetteOcean
- BetteOcean Low-Line
- BetteOne
- BetteOne Relax
- BetteSelect
- BetteSelect with overflow on side
- BetteSet
- BetteSetline
- BetteSpace S
- BetteSpace M
- BetteStarlet
- BetteStarlet Spirit
- BetteStarlet Flair Oval
- BetteStarlet I
- BetteStarlet II
- BetteStarlet III
- BetteStarlet IV
- BetteStarlet V
- BetteStarlet Octa
- BetteStarlet Oval
- BetteStarlet Hexagon
- LaBette

Links:

Installation film



→ lead.me/bbCjqp

Installation instructions



→ lead.me/bbCjul

Installation steps for the bath foot, universal

Installation film



[-> lead.me/bbCjqp](https://lead.me/bbCjqp)

1. Prepare the bath

- Slightly open out the tabs on the bath




2. Position the feet

- Place the feet on the underside of the bath
- Position the first foot and secure in the tab
- Position the second foot on the other side and secure in the tab
- Fold over any superfluous tape



3. Secure the feet

- Tighten the metal tape with an Allen key
- Check the fit of the feet on the bath

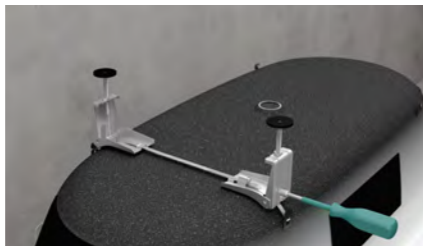


4. Set the foot height

- Set the bath foot at the required height
- Lock the set height with the nuts




5. Prepare the waste

- Fit the waste and overflow fittings
- Prepare the waste

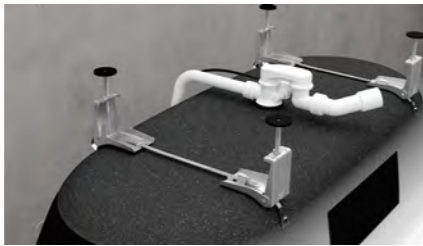

6. Position the bath

- Apply the first sealing level
- Fit the bath anchors (optionally available)
- Position the bath with the pre-assembled sealing fleece and insulating tape (optionally available)
- Check twice with a spirit level
- Connect the earthing
- Connect the waste (5 mm gap below the fitting)

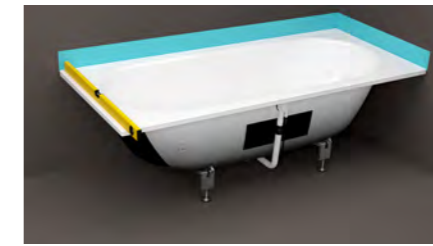

7. Connect the bath

- Work the sealing fleece into the second sealing level
- Position the tile separator strips
- Apply the underpinning tape
- Apply tile adhesive to wall and floor
- Tile
- Remove the tile separator strips




8. Finishing

- Clean the tray rim
- Fill the bath with water and silicone the rims
- Leave to set for 24 hours



Installation Box Easy Connect

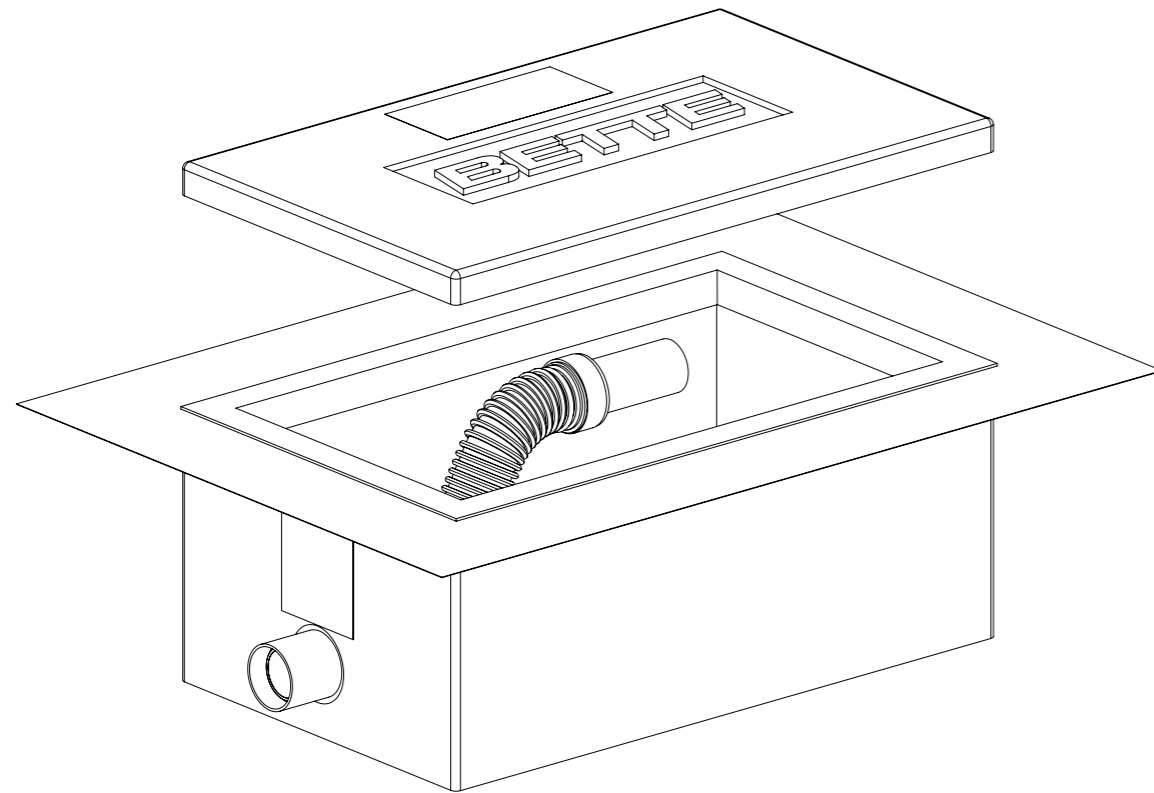




Installation Box Easy Connect Fit, connect, done.

The installation Box Easy Connect is the plug-and-play solution for safely connecting shower trays and baths. All the required components are pre-assembled in a box during manufacture – all that remains to be done is to connect the external pipework.

The waterproof box is then integrated directly into the floor structure. It can also be integrated with the bonded seal and the sealing collar to comply with industry standards. There is no need for additional sealing with tape.

Advantages

- Fast, safe and easy installation
- Less work required on-site due to pre-assembled components
- Installation complies with industry standards without additional sealing tape on the bath rim
- Tested sealing components included in the delivery
- Confirms to DIN 18534 / ÖNORM B3407
- Tested to ETAG 022

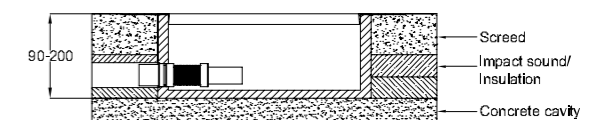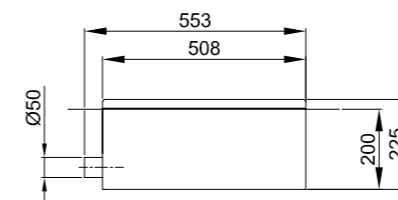

Can be combined with:



Links:



Information

- Universal seal for baths and shower trays.
- Depending on the floor construction, the Easy Connect installation box can easily be cut to a height between 90 – 200 mm.
- Cannot be combined with the BetteScope waste fitting (order no. B574-)

Certification

For seals to industry standards as per DIN 18534-1.

Included in the delivery

- Box and cover in Piocelan®
- Pre-assembled flexi hose
- Sealing collar
- Foil adhesive



Waterproof
ETAG 022
DIN 18534

DIN 18534 requires baths and shower trays to be specially sealed.
→ Page 57






Noise level only
22 dB(A)
as per DIN 4109*2

*2 structural general conditions as per test report.

Installation Box Easy Connect with a shower, a built-in bath and a free-standing bath

Installation film


[→ Lead.me/bbCjpa](https://lead.me/bbCjpa)

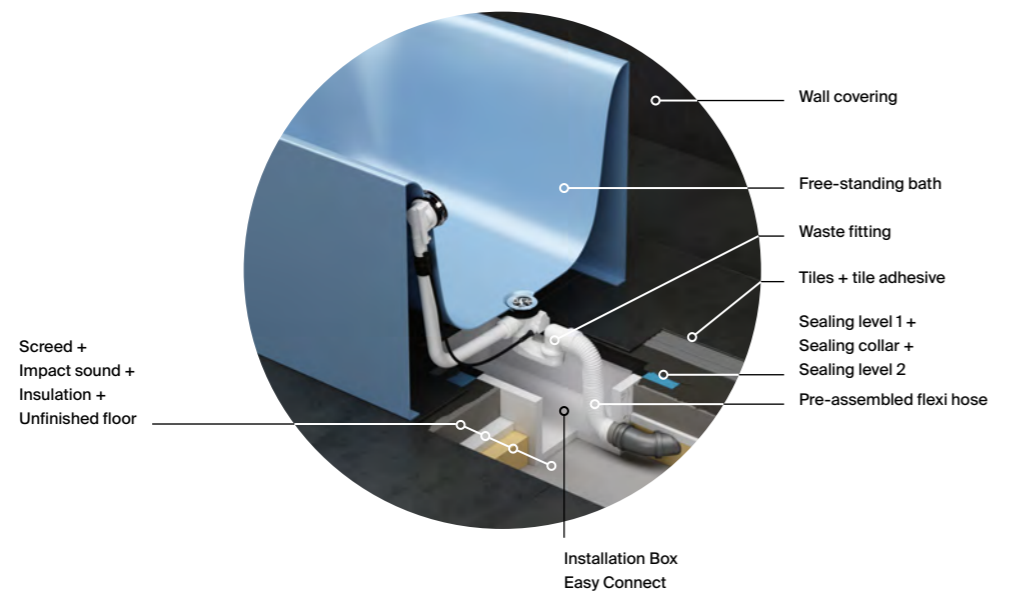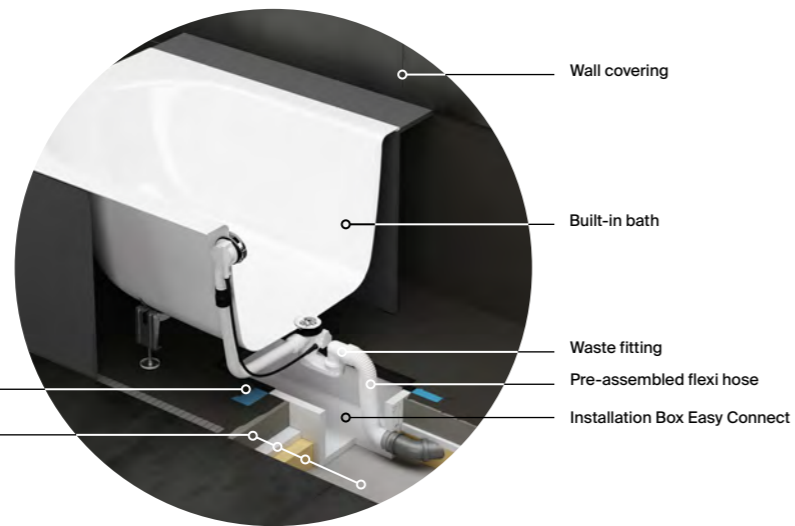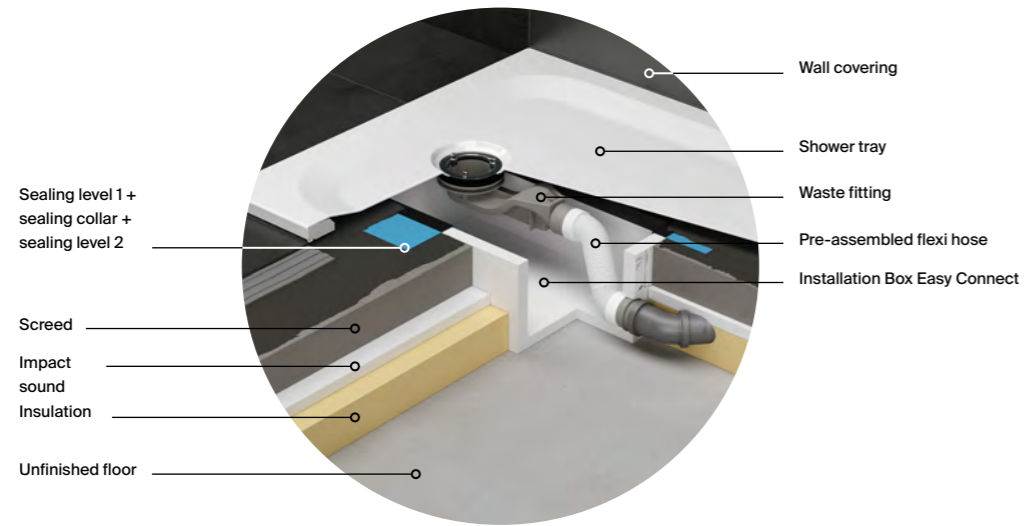

Installation steps


1. Establishing „g“ and „h“ dimensions

- establish dimensions „g“ and „h“ from the bath rim to the middle of the waste

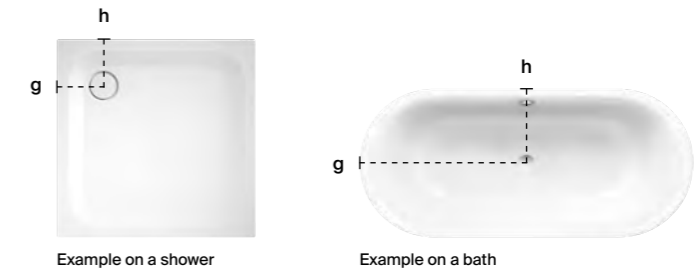

1. Place the box

- Take the distance from the midpoint of the waste (x and y) to the outer rim of the box
- Determine the position of the box, taking into account the outer minimum gap (90 mm) to the walls and the drain position under the shower tray / bath.

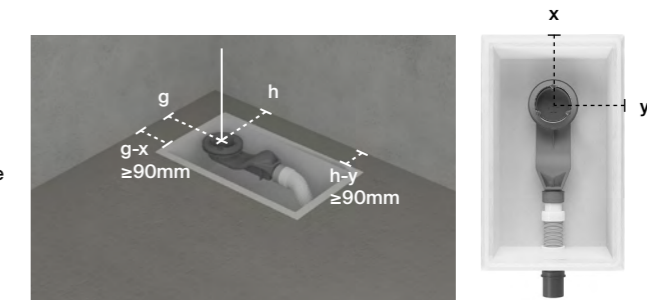

- Position the box under the drain of the shower/ bath and draw the position all round with a 90 mm gap for the sealing collar
- Apply adhesive to the underside of the box and the unfinished floor
- Connect the box to the waste




2. Integrate in the floor construction

- Construct the floor (insulation, impact insulation, screed)
- Cut down the box




3. Seal

- Glue in the sealing collar
- Apply the first sealing level to wall and floor
- Integrate the sealing collar in the compound seal
- Connect the waste fitting
- Put the cover in place

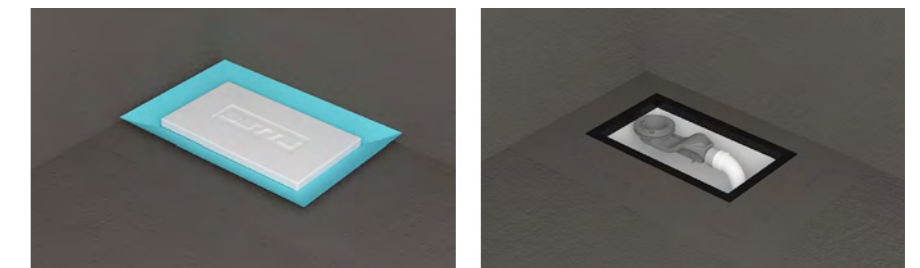

4. Assemble the end product

Seals

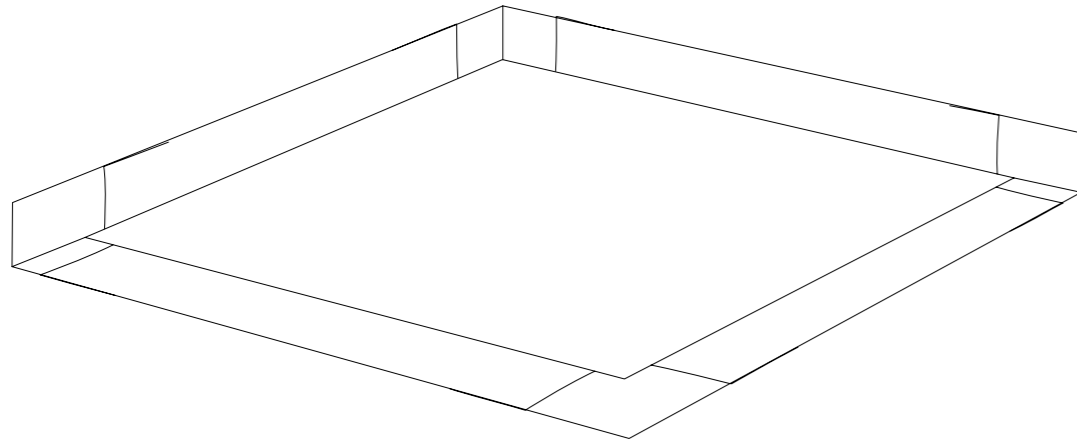

DIN 18534 for waterproofing for indoor applications requires baths and shower trays to have special seals. Silicone joints are not enough. Installation to industry standards can only be achieved with sealing tapes or upstands.

Our sealing system is an easy to fit solutions that complies with industry standards. The sealing tapes that are included in the delivery are particularly flexible, and can also be applied to corners with creasing. We also offer this reliable sealing system for the minimum support carried and as the sealing system Pro with integrated cutting protection.

Bette's sealing components have undergone the continuous stress test based on ETAG 022, and have been confirmed as waterproof by the certification and quality assurance specialist Kiwa.

Which standards apply here?

DIN 18534
Waterproofing for indoor applications

ETAG 022
European guideline for seals
for wall and floors in wet rooms

What needs to be observed?

Everyone involved in the construction is responsible for a reliable seal. They include, in addition to the fitter, the planner and the tiler.

DIN 18534 item 4.1.9 Reliability states:
„The seal must fulfil its function for the intended period of use with adequate reliability.“
In private applications, this period is an average of 20-25 years.

Sealing is obligatory.

„Areas under/behind baths or showers are to be protected against the effects of water ...“

Silicone joints are not considered to be permanent seals.










„Sealant joints on the bath rim do not constitute a seal in the sense of this standard.“










„Sealing tape or upstands must be used.“


„Connecting the bath rim to the sealant layer, e.g. with bath rim sealing tapes or upstands.“

58 – 59	Planning aid shower seal
60 – 61	Sealing system Pro
62 – 63	Sealing system

Planning aid shower seal

		Sealing with the BetteUpstand		Sealing using the assembly aid
		Wall seals with the BetteUpstand cf. page 88 - 99	Sealing set for BetteUpstand flush-to-floor installation B57-0080	Tested waterproof seal included in the delivery
 BetteFloor	Installation System Universal			x
	Installation System Basic			
	Foot-System			
	Minimum Support			
 BetteFloor Side	Installation System Universal			x
	Installation System Basic	x	x	
	Foot-System	x	x	
	Minimum Support	x	x	
 BetteUltra	Installation System Universal			x
	Installation System Basic	x	x	
	Foot-System	x	x	
	Minimum Support	x	x	
 BetteSupra	Foot-System	x		
 BetteFloor Caro	Installation System Flush-to-Floor BetteCaro			
	Foot-System			
 BetteFloor Corner	Installation System Flush-to-Floor BetteCorner			
	Foot-System			
 BetteCaro	Installation System Flush-to-Floor BetteCaro	x	x	
	Foot-System BetteCaro	x	x	
 BetteCorner	Installation System Flush-to-Floor BetteCorner	x	x	
	Foot-System BetteCorner	x		
 BetteQuinta	Foot-System	x	x	

		Sealing with sealing tape (if not included in the delivery of the assembly aid)				
		Optional: Sealing with cutting protection		Optional: Seal without cutting protection		
		Others	Flush-to-floor	Installation Box Easy Connect B57-0400	For wooden floors B57-0375	Others
 BetteFloor	Installation System Universal					
	Installation System Basic	B57-0376	B57-0377		x	B57-0370
	Foot-System	B57-0376			x	B57-0370
	Minimum Support			x	x	B57-0371
 BetteFloor Side	Installation System Universal				x	
	Installation System Basic	B57-0376	B57-0377		x	B57-0370
	Foot-System	B57-0376			x	B57-0370
	Minimum Support			x	x	B57-0371
 BetteUltra	Installation System Universal				x	
	Installation System Basic	B57-0376	B57-0377		x	B57-0370
	Foot-System	B57-0376			x	B57-0370
	Minimum Support			x	x	B57-0371
 BetteSupra	Foot-System	B57-0376				B57-0370
 BetteFloor Caro	Installation System Flush-to-Floor BetteCaro					
	Foot-System	B57-0379				B57-0374
 BetteFloor Corner	Installation System Flush-to-Floor BetteCorner					
	Foot-System	B57-0378				B57-0373
 BetteCaro	Installation System Flush-to-Floor BetteCaro					
	Foot-System BetteCaro	B57-0379				B57-0374
 BetteCorner	Installation System Flush-to-Floor BetteCorner					B57-0373
	Foot-System BetteCorner	B57-0378				B57-0373
 BetteQuinta	Foot-System	B57-0376				B57-0370

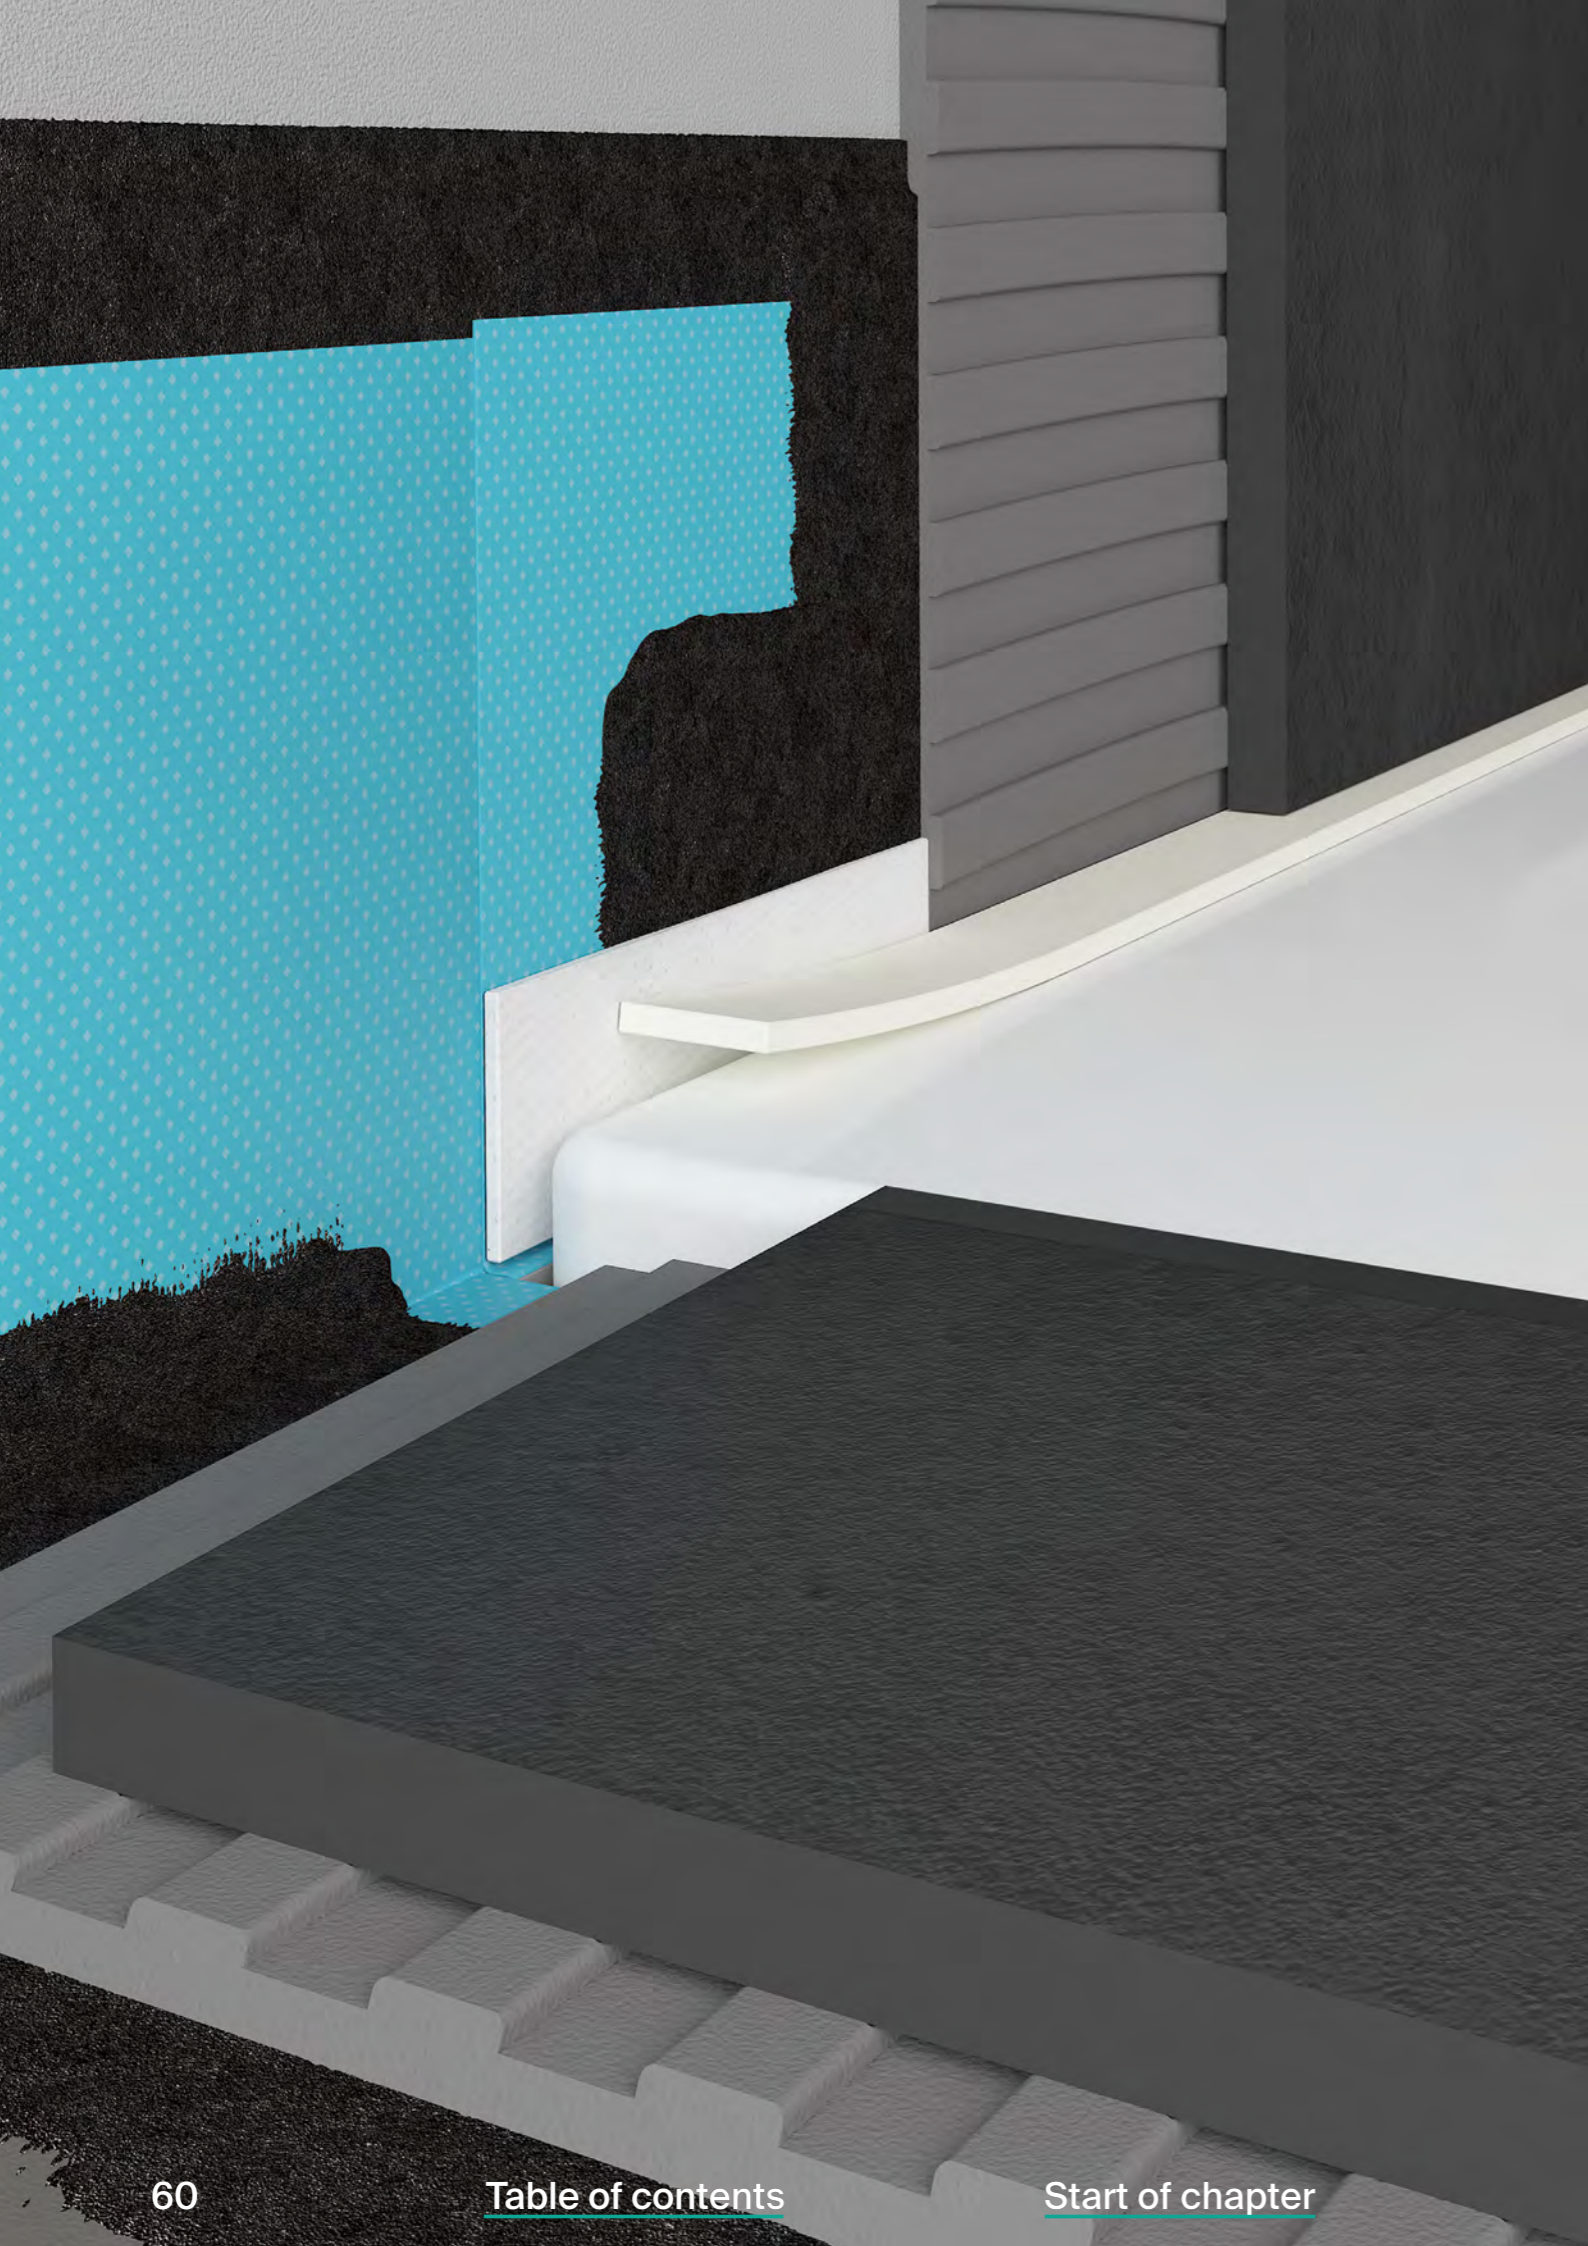

Sealing System Pro

Leakproof and cut-proof to industry standards



Waterproof
ETAG 022
DIN 18534

DIN 18534 requires baths and shower trays to be specially sealed.
→ [Page 57](#)

Installation of the bath and shower tray as per DIN 18534 is achieved with the sealing system Pro, offering the highest level of protection against water damage. The cutting protection included in the delivery also protects the sealing system against damage, for instance by a cutter knife when renewing silicone joints.

Included in the delivery

- Sealing fleece
- Pre-assembled corners
- Cut-proof tape
- Insulating tape
- Tile separator strips
- Pressure roller

Advantages

- Reliably leakproof and cut-proof
- Cutting protection made of thin, flexible fabric
- Bonded in corners without creasing
- Material proven in the mountaineering industry
- For baths and shower trays

Certification

- For seals to industry standards as per DIN 18534-1.

- Can be combined with:
- flush-to-floor installation of showers
 - Baths and showers
 - Pentagonal shower trays
 - Quadrant shower trays

Links:

Installation film



→ lead.me/bbCjrd

Installation instructions




→ lead.me/bbCmDO

Certificates



→ lead.me/bbCmHf

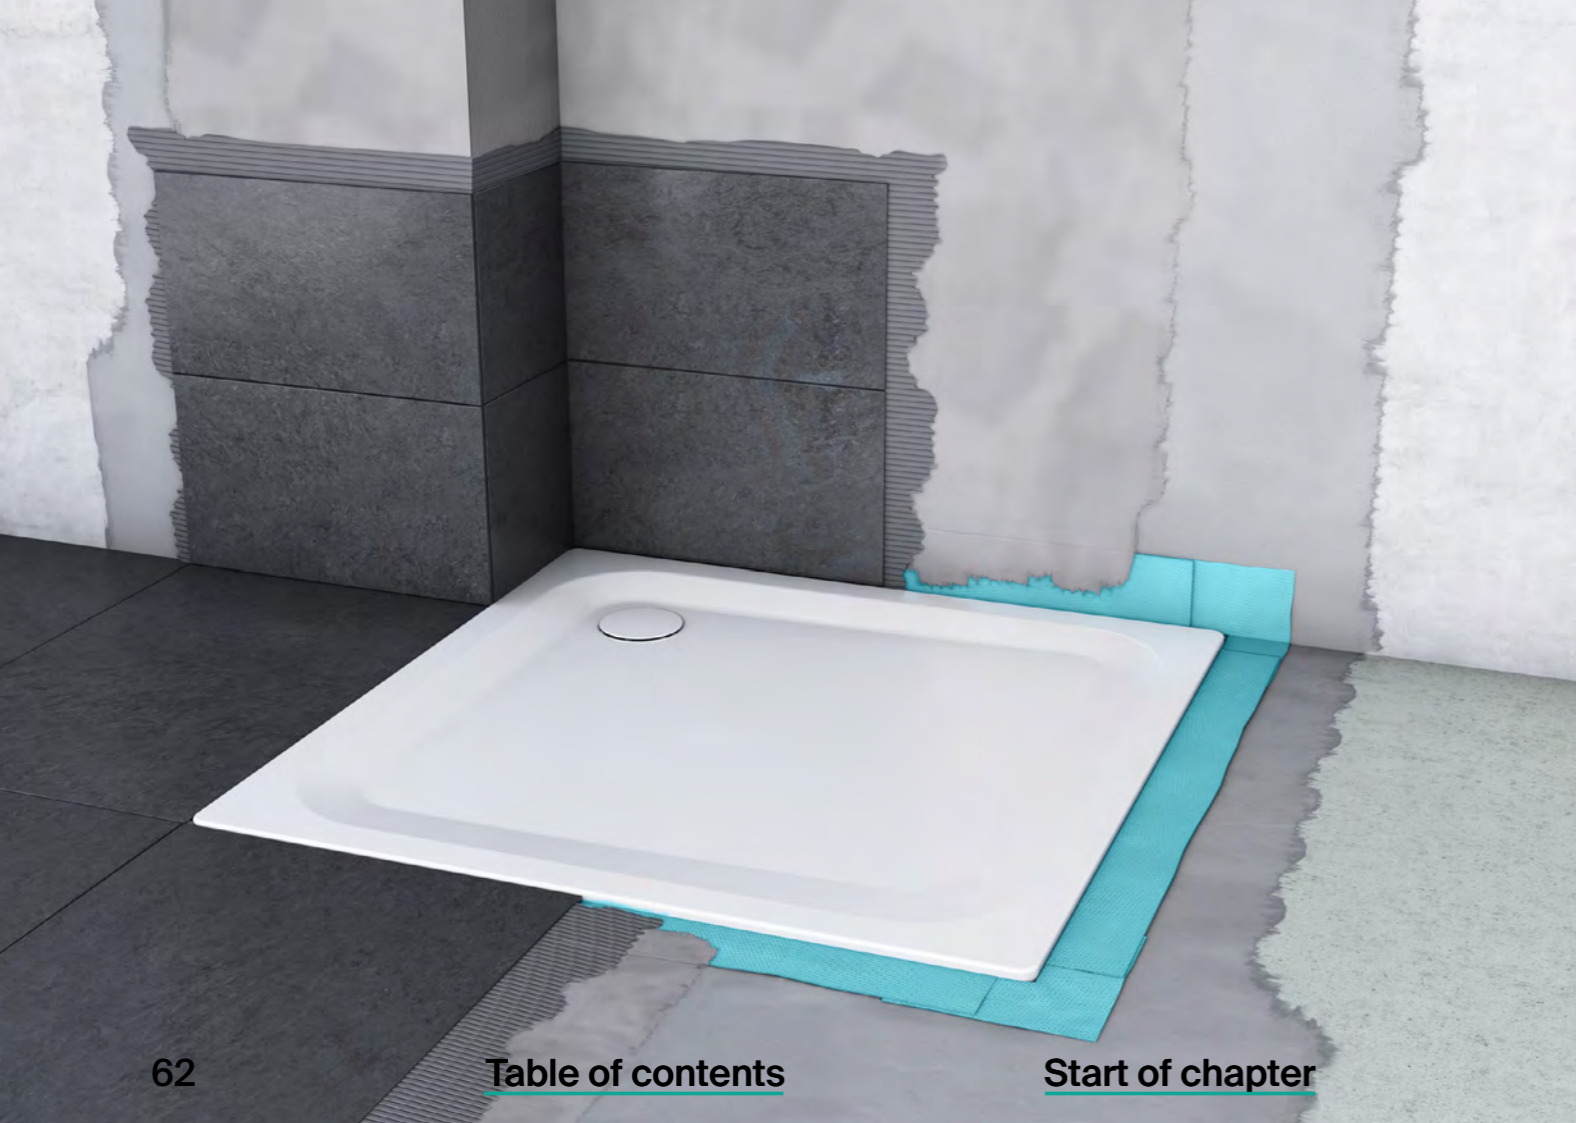

Sealing system Sealing to industry standard

The sealing system offers the greatest protection against moisture damage around floors and walls as per standard DIN 18534. Special sealing tapes that are integrated in the compound seal protect the building shell against moisture penetration, for instance through porous silicone joints. A set contains all the necessary components, including pre-shaped corners.

Advantages

- For wall seals to industry standards on baths and shower trays
- Also suitable for the flush-to-floor installation of showers
- Also suitable for wooden floors
- Sealing tapes are particularly flexible and adaptable

Included in the delivery

- Sealing tapes
- pre-fabricated corner elements
- Sound-insulating strips
- Tile separator strips

Certification

- For seals to industry standards as per DIN 18534-1.



Waterproof
ETAG 022
DIN 18534

DIN 18534 requires baths and shower trays to be specially sealed.
→ [Page 57](#)

Can be combined with

- Shower trays and shower areas
- Shower trays and shower areas with minimum support
- Baths
- Quadrant shower trays
- Pentagonal shower trays
- Wooden floors

Links:

Installation instructions


Topic page



→ lead.me/bbCmDA

→ lead.me/bbCmHR

Drainage


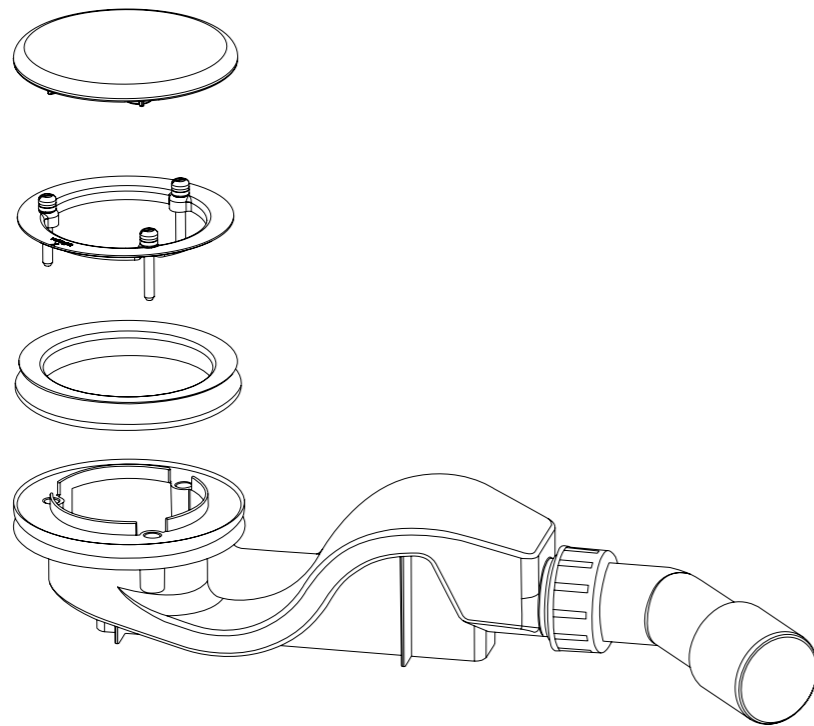


- 66-68 [Waste fittings for shower areas / trays](#)
- 69-73 [Waste and overflow fittings for baths](#)
- 73 [Waste and overflow fittings for BetteArt baths](#)
- 74-75 [Waste and overflow fittings for Silhouette baths](#)
- 76 [Waste and overflow fittings Plus 5 for baths](#)
- 77 [BetteSplash](#)
- 77 [Spring tap](#)
- 78-79 [BetteSensory](#)



Waste fittings shower areas / shower trays

BetteSolid 50, side outlet, B598-


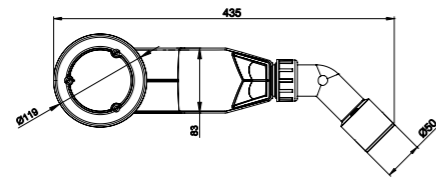


Drainage direction: lateral
Installation height: 68 mm
Drain diameter: 90 mm
Drainage capacity: 0,6 l/sec
Water seal depth: 50 mm
Certification: EN 274

Easy access for cleaning.

Scope of delivery:
incl. filter

BetteSolid 30, side outlet, B597-


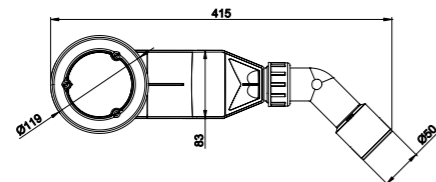


Drainage direction: lateral
Installation height: 48 mm
Drain diameter: 90 mm
Drainage capacity: 0,6 l/sec
Water seal depth: 30 mm

Easy Access for cleaning also via spiral.

Scope of delivery:
Incl. filter.

BetteScope, side outlet, B574-





Drainage direction: lateral
Installation height: 60 mm
Drain diameter: 90 mm
Drainage capacity: 0,85 l/sec
Water seal depth: 50 mm
In accordance to EN 274.

With removable odour trap.

Scope of delivery:
Incl. hair trap.


BetteDown, vertical outlet, B573-

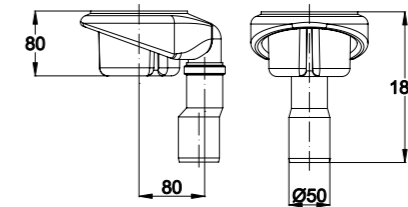

Drainage direction: vertical
Installation height: 80 mm
Drain diameter: 90 mm
Drainage capacity: 0,6 l/sec
Water seal depth: 50 mm
In accordance to EN 274.

With removable odour trap.

Shower waste Ø 52 mm, lateral, B577-

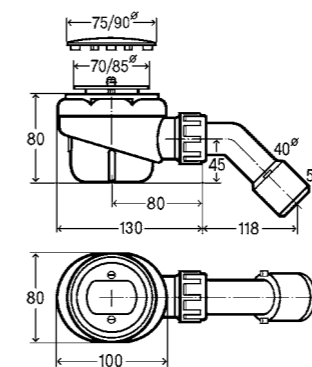


Drainage direction: lateral
Installation height: 80 mm
Drainage capacity: 0,73 l/s
Water seal depth: 50 mm
In accordance to EN 274.

All dimensions in mm

All dimensions in mm


Waste fittings shower areas / shower trays

BetteCompact, side outlet, B578-901

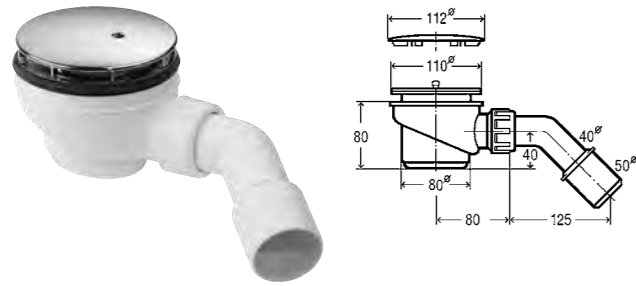

Drainage direction: lateral
Installation height: 80 mm
Drain diameter: 90 mm
Drainage capacity: 0,6 l/sec
Water seal depth: 50 mm
Not for the United Kingdom


BetteCompact, vertical outlet, B579-901

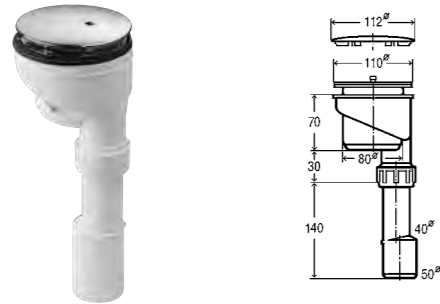

Drainage direction: vertical
Drain diameter: 90 mm
Drainage capacity: 0,6 l/sec
Water seal depth: 50 mm
Not for the United Kingdom


Waste- and overflow fittings baths Ø 52 mm

Waste- and overflow fitting Simplex Ø 52 mm, 560 mm, B629-901

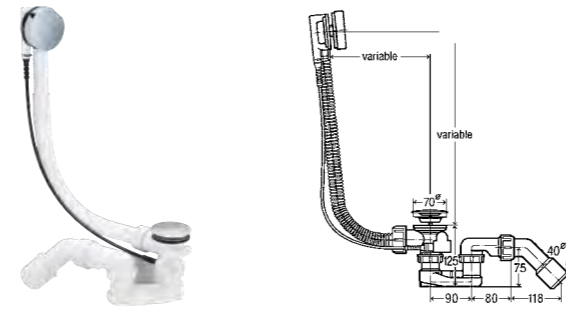

Bowden cable length: 40/50 x 560 mm
Installation height: 125 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec


Waste- and overflow fitting Simplex Ø 52 mm, 725 mm, B630-901

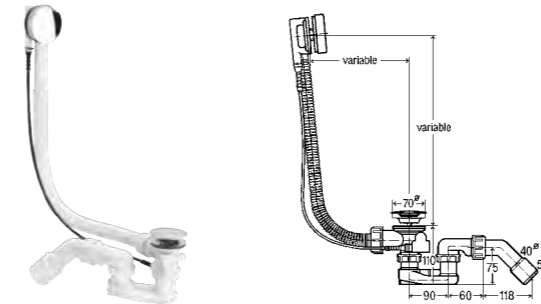

Bowden cable length: 40/50 x 1070 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec


Waste- and overflow fittings baths Ø 52 mm

Waste- and overflow fitting Ø 52 mm,, B600-

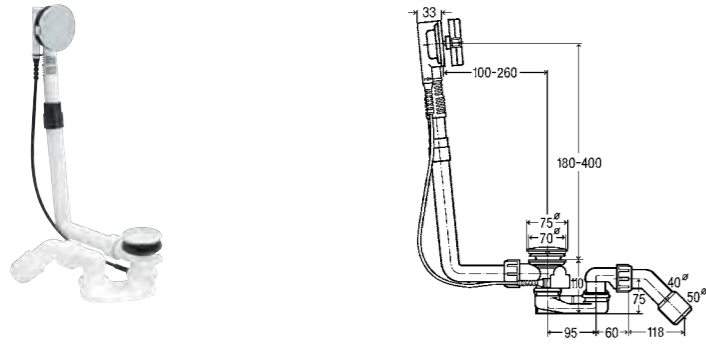


Bowden cable length: 40/50 x 560 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste, overflow and filling unit Ø 52 mm, 560 mm, B604-

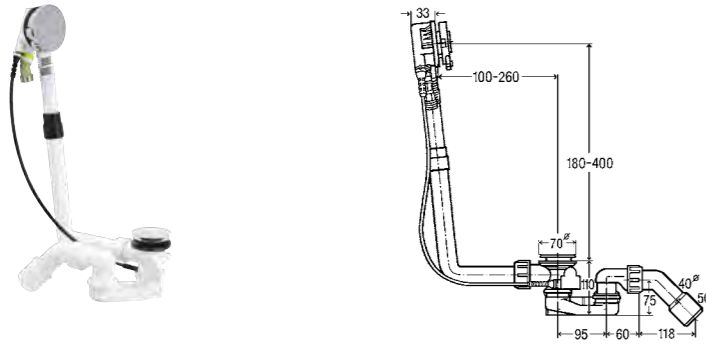

Bowden cable length.: 40/50 x 560 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec


Waste- and overflow fitting Ø 52 mm, 725 mm, B602-

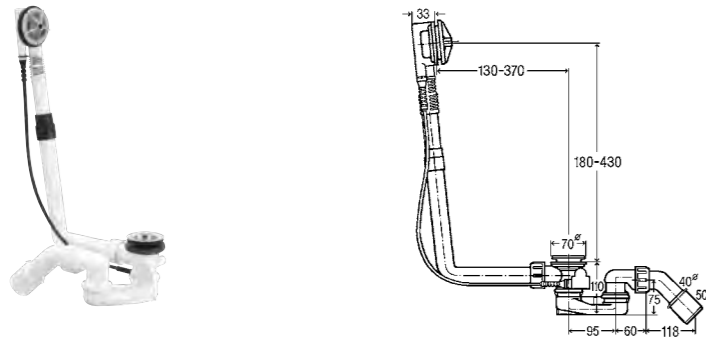

Bowden cable length: 40/50 x 725 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec


All dimensions in mm

Waste, overflow and filling unit Ø 52 mm, 725 mm, B606-

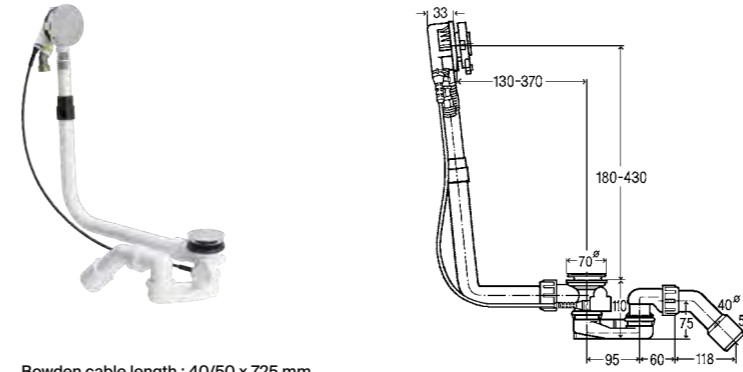


Bowden cable length: 40/50 x 725 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste, overflow and filling unit Ø 52 mm, 1070 mm, B607-

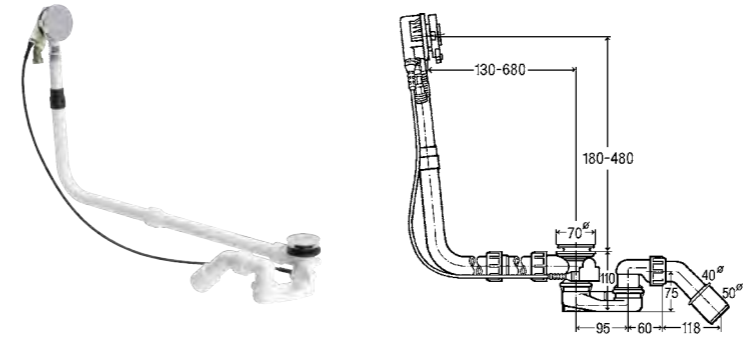

Bowden cable length.: 40/50 x 1070 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste- and overflow fitting Ø 52 mm, 1070 mm, B603-

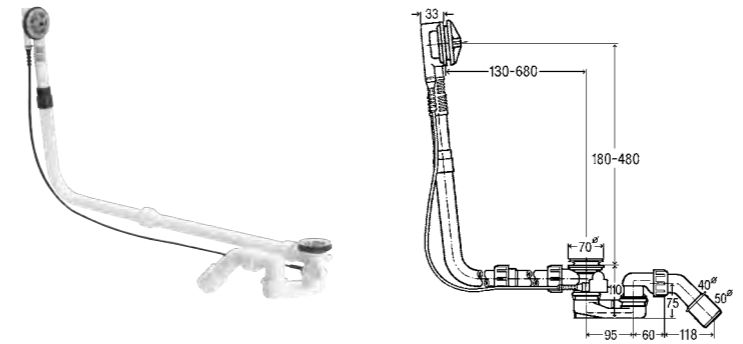


Bowden cable length: 40/50 x 1070 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

All dimensions in mm


Waste- and overflow fittings baths Ø 52 mm

Waste- and overflow fitting Ø 90 mm, 725 mm, B608-

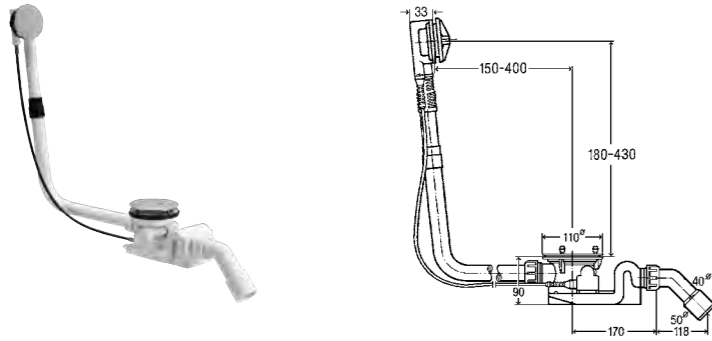


Bowden cable length: 40/50 x 725 mm
Installation height: 90 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste, overflow and filling unit Ø 90 mm, 725 mm, B611-

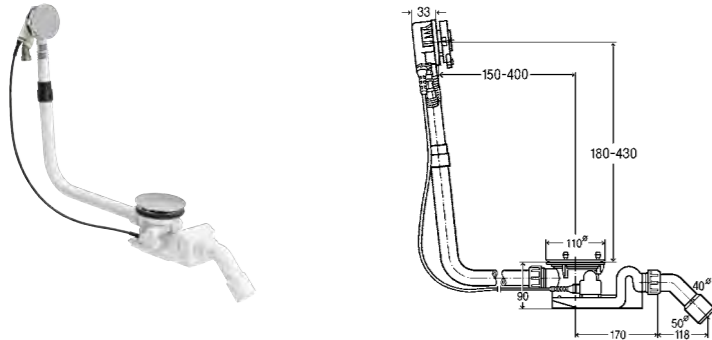

Bowden cable length: 40/50 x 725 mm
Installation height: 90 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste- and overflow fitting Ø 90 mm, 1070 mm, B610-

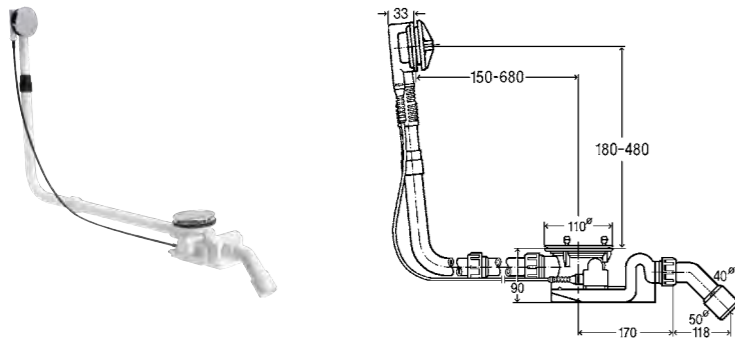


Bowden cable length: 40/50 x 1070 mm
Installation height: 90 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

All dimensions in mm


Waste- and overflow fittings bathtubs Ø 90 mm / BetteArt baths Ø 52 mm

Waste, overflow and filling unit Ø 90 mm, 1070 mm, B613-

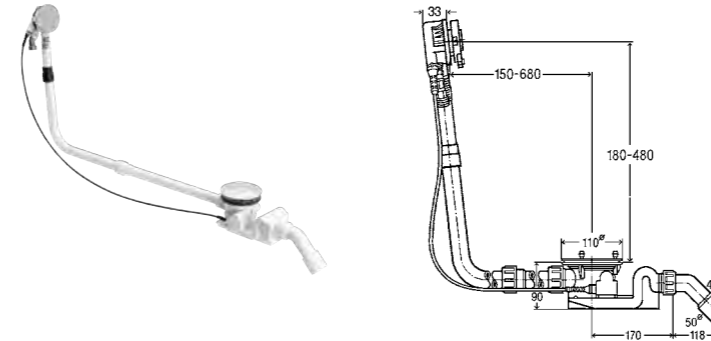


Bowden cable length: 40/50 x 1070 mm
Installation height: 90 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Waste, overflow and filling unit Trio BetteArt, 725 mm, B615-

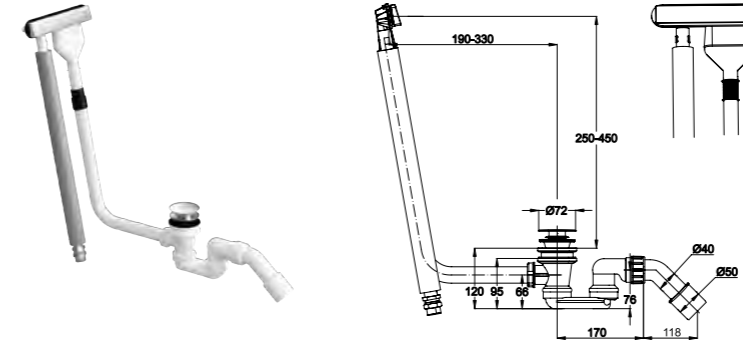

Drain diameter: 52 mm
Drainage capacity: 0,87 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,6 l/sec

Waste- and overflow fitting BetteArt, B614-

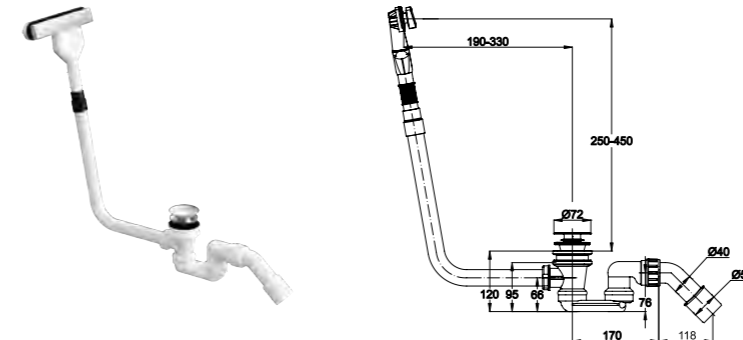


Drain diameter: 52 mm
Drainage capacity: 0,87 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,6 l/sec

All dimensions in mm

Waste- and overflow fittings Silhouette baths Ø 52 mm


Waste- and overflow fitting Silhouette Ø 52 mm, 725 mm, B601-



Bowden cable length: 40/50 x 725 mm
Installation height: 110 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Scope of delivery:
a flexible drain pipe for the installation is included


Waste, overflow and filling unit Silhouette Ø 52 mm, 725 mm, B605-



Bowden cable length.: 40/50 x 725 mm
Drain diameter: 52 mm
Drainage capacity: 0,92 l/sec
Water seal depth: 50 mm

Waste- and overflow fittings Silhouette baths Ø 90 mm


Waste- and overflow fitting Silhouette Ø 90 mm, 725 mm, B609-



Bowden cable length.: 40/50 x 725 mm
Installation height: 90 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm
Overflow capacity: 0,63 l/sec

Scope of delivery:
a flexible drain pipe for the installation is included


Waste, overflow and filling unit Silhouette Ø 90 mm, 725 mm, B612-



Bowden cable length.: 40/50 x 725 mm
Drain diameter: 90 mm
Drainage capacity: 1,25 l/sec
Water seal depth: 50 mm

Waste- and overflow fittings Plus 5 for baths


Waste- and overflow fitting Plus 5

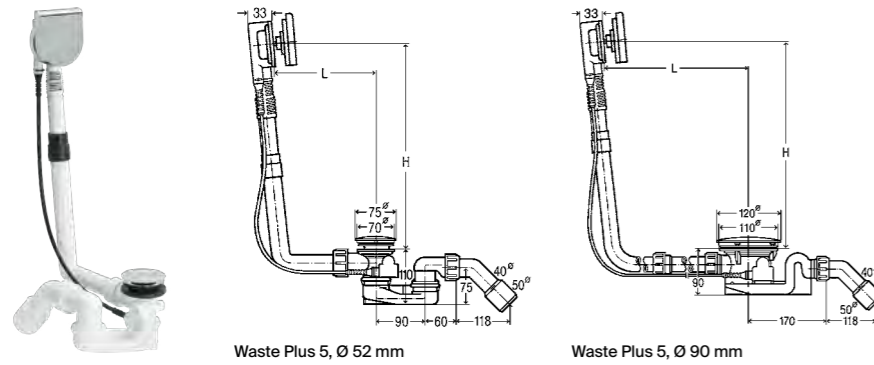

- 50 mm higher water level for maximum bathing comfort
- Suitable for baths with outlet Ø 52 mm and Ø 90 mm
- Already installed waste-models from 2015 can be re-equipped with the fitting-set
- With the fitting-set, older models of the BetteWaste plus 5 can be updated

article no.	variant	L dimensions	H dimensions
B617-901	Waste- and overflow fitting Plus 5, Ø 52 mm, 560 mm	100-260 mm	180-400 mm
B619-901	Waste- and overflow fitting Plus 5, Ø 52 mm, 1070 mm	100-680 mm	180-480 mm
B621-901	Waste- and overflow fitting Plus 5, Ø 90 mm, 560 mm	150-680 mm	180-480 mm
B625-901	Waste- and overflow fitting Plus 5 Silhouette Ø 52 mm, 1070 mm	100-680 mm	180-480 mm
B627-901	Waste- and overflow fitting Plus 5 Silhouette Ø 90 mm, 725 mm	100-680 mm	180-480 mm

Waste, overflow and filling unit Plus 5

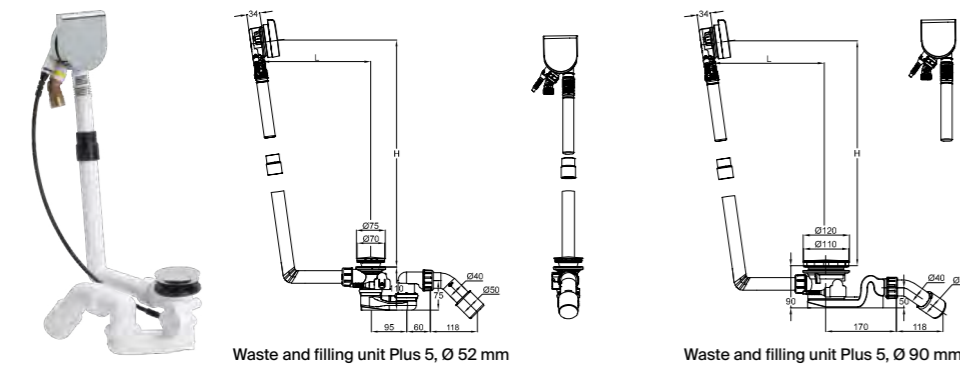

- 50 mm higher water level for maximum bathing comfort
- Suitable for baths with outlet Ø 52 mm and Ø 90 mm
- Already installed waste-models from 2015 can be re-equipped with the fitting-set
- With the fitting-set, older models of the BetteWaste plus 5 can be updated

article no.	variant	L dimensions	H dimensions
B618-901	Waste, overflow and filling unit Plus 5, Ø 52 mm, 560 mm	100-260 mm	180-400 mm
B620-901	Waste, overflow and filling unit Plus 5, Ø 52 mm, 1070 mm	100-680 mm	180-480 mm
B622-901	Waste, overflow and filling unit Plus 5, Ø 90 mm, 560 mm	150-680 mm	180-480 mm
B626-901	Waste, overflow and filling unit Plus 5 Silhouette Ø 52 mm, 1070 mm	100-680 mm	180-480 mm
B628-901	Waste, overflow and filling unit Plus 5 Silhouette, Ø 90 mm, 725 mm	100-680 mm	180-480 mm


All dimensions in mm

BetteSplash / Spring Tap


BetteSplash, B500-901



- Inlet capacity:
- max. 26 l/min.
 - recommended 15 l/min.
 - min. 11 l/min.

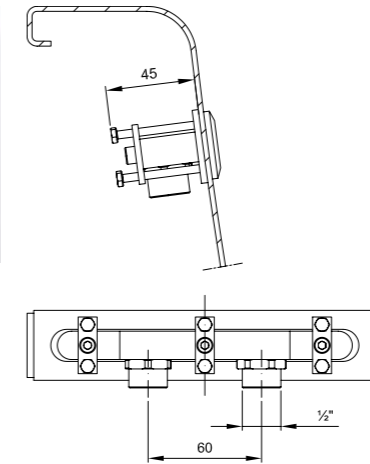

The cascade filler BetteSplash comes prefitted. Please mention position of filler on your order. Special positioning of the cascade filler is possible on demand, please contact us in this regard. The waste- and overflow-fitting has to be ordered separately.

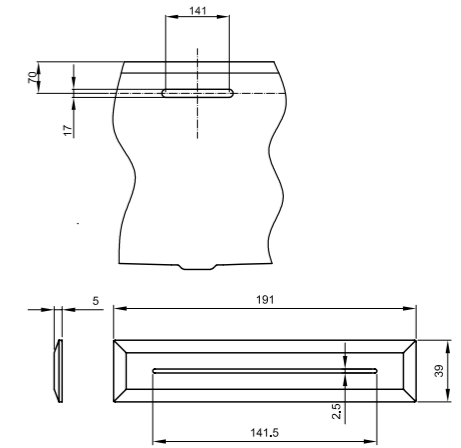

BetteSplash water intake via 2 x 1/2" connections. If used with preceding thermostat a T-fitting is required.

Spring Tap



- waste capacity at 300 mm water-level
- Ø 90 mm: 1,0 l/s
 - Ø 52 mm: 0,85 l/s
- overflow capacity at 60 mm water-level above centre of overflow hole 0,63 l/s
- filling capacity max. 30 l/min

The water level in the bath rises as if fed from an underground spring. The BetteSpring tap is suitable for many baths. Filling the bath is particularly convenient and quiet.


article no.	variant
B531-901	Spring Tap Ø 52 mm
B533-901	Spring Tap for Silhouette Ø 52 mm
B551-901	Spring Tap Ø 90 mm*
B553-901	Spring Tap for Silhouette Ø 90 mm

*20 mm extra below bath required.

All dimensions in mm

BetteSensory

BetteSensory, B631-

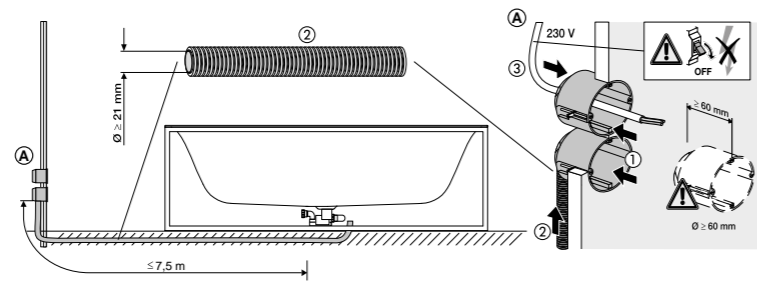

Pop-up wastes with no visible overflow. The overflow function is provided by a pressure sensor integrated in the pop-up waste that records the water level in the bath.

Included in the delivery of the pop-up waste are a control box, a 12-volt mains unit and two 8-m control cables. The control box, which includes an emergency battery, and the mains unit need to be integrated using the 8-m cable in two accessible flush-mounted boxes outside the bath.


A 230-volt power connection is required there.

The control cable needs to be laid from the concealed socket to under the bath for connection to the fitting.

The baths need to be ordered with the ending oUeL.

An inspection opening must be included when fitting a built-in bath with BetteSensory.


You will find a video animation on the functioning of BetteSensory here: my-bette.com/en/service/videos

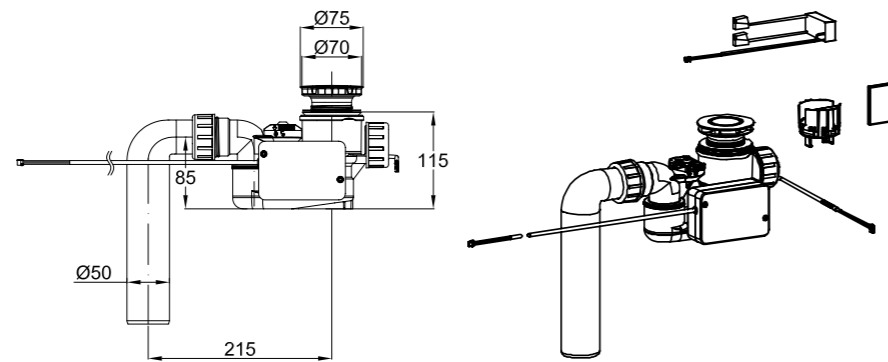

All dimensions in mm

BetteSensory Silhouette

BetteSensory Silhouette, B635-

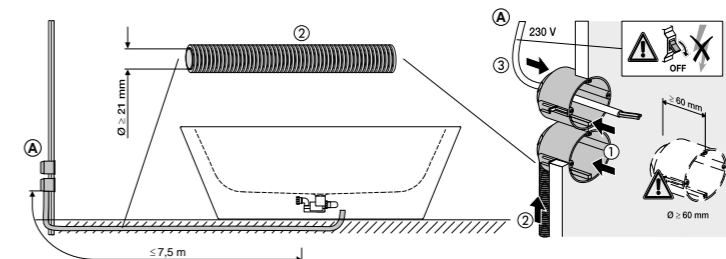

a flexible drain pipe for the installation is included

Pop-up wastes with no visible overflow. The overflow function is provided by a pressure sensor integrated in the pop-up waste that records the water level in the bath.



Included in the delivery of the pop-up waste are a control box, a 12-volt mains unit and two 8-m control cables. The control box, which includes an emergency battery, and the mains unit need to be integrated using the 8-m cable in two accessible flush-mounted boxes outside the bath.

A 230-volt power connection is required there.

The control cable needs to be laid from the concealed socket to under the bath for connection to the fitting.






The baths need to be ordered with the ending oUeL.

You will find a video animation on the functioning of BetteSensory here: my-bette.com/en/service/videos

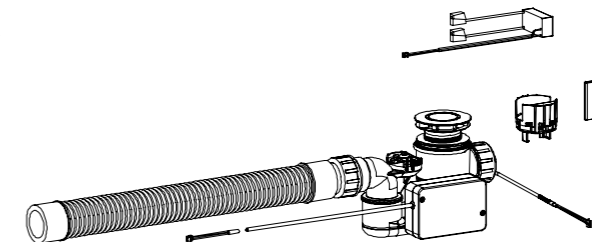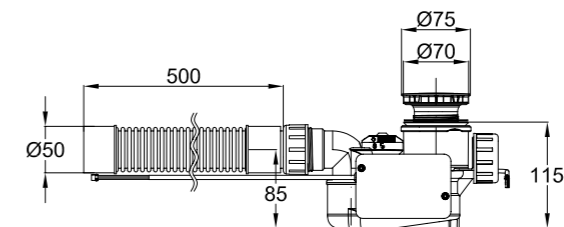

All dimensions in mm

Anti-Slip

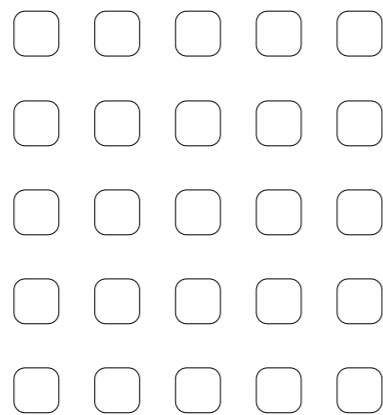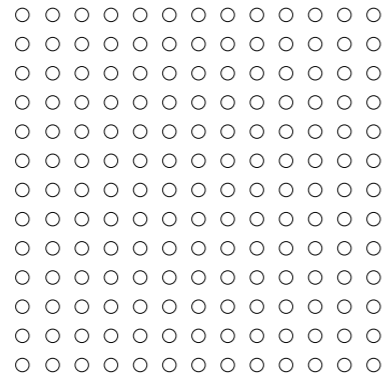

- 82–83 [BetteAnti-Slip Pro](#)
- 84–85 [BetteAnti-Slip](#)
- 86–87 [BetteAnti-Slip barrier-free](#)

Anti-Slip planning aid

	Bette Anti-Slip Pro	Bette Anti-Slip	Bette Anti-Slip barrier-free	Bette Anti-Slip over the entire floor area	Complies with DIN 18040-1 Construction of accessible buildings Part 1: Publicly accessible buildings	Complies with DIN 18040-2 Construction of accessible buildings Part 2: Dwellings**	BetteAnti-Slip: anti-slip as per rating group B for wet-loaded barefoot areas as per DIN 51097
Shower trays / shower areas	BetteFloor	x	□ 1	•		1200 x 1200 mm	x
	BetteFloor Side	x	□ 1	•		1200 x 1200 mm 1400 x 1200 mm 1500 x 1200 mm 1600 x 1200 mm	x
	BetteFloor Caro	x	□ 1				x
	BetteFloor Corner	x	□ 1				x
	BetteUltra	x	•	•	•	1500 x 1500 mm	1200 x 1200 mm 1300 x 1300 mm 1400 x 1400 mm 1500 x 1500 mm
	BetteSupra	x	•	•			x
	BetteQuinta		•	•			x
	BetteCaro	x	•	•			x
	BetteCorner	x	•	•			x
Baths	drain at the foot end		•	•			x
	with central outlet*		•	•			x
	BetteLux, BetteLoft, BetteOne		□ 2				x
	BetteOne Relax		□ 2				x

- = spot design
- 1 = square design
- 2 = gently rounded squares
- x = applicable

* except: BetteLoft Ornament, BetteLux Oval I Silhouette, BetteLux Shape, BetteLux Silhouette, BetteLux Silhouette Side, BetteStarlet I Silhouette

** practical tip: smaller shower trays can also be used for barrier-free installation. However, the movement area required by the standard must be observed.



BetteAnti-Slip Pro

Safety you can feel, beauty you can see.

The BetteAnti-Slip Pro finish provides additional safety and slip resistance to the industry standard. The system can be easily tailored to individual needs and design specifications. The optical and functional qualities of BetteGlaze® are retained in full. The anti-slip feature complies with rating group B for wet-loaded barefoot areas as per DIN 51097 and rating class R10 for anti-slip properties in workrooms and working areas with an increased risk of slipping as per DIN 51130.

Information

- Almost invisible anti-slip surface
- applied over the entire surface and permanently fired on
- Available for the Exclusive colours, White (000), Pergamon (001), Manhattan (002), Bahama Beige (003), Edelweiss (004), Jasmin (006)
- For shower areas BetteFloor, BetteFloor Side and shower trays BetteUltra and BetteSupra
- Cannot be combined with BetteGlaze® Plus
- Enamelled waste covers are available to match the BetteAnti-Slip Pro finish.




Only selected dimensions are barrier-free; see price list for further information.



BetteAnti-Slip Pro is anti-slip as per rating group B for wet-loaded barefoot areas (DIN 51097), confirmed by TÜV Süd.

Can be combined with:

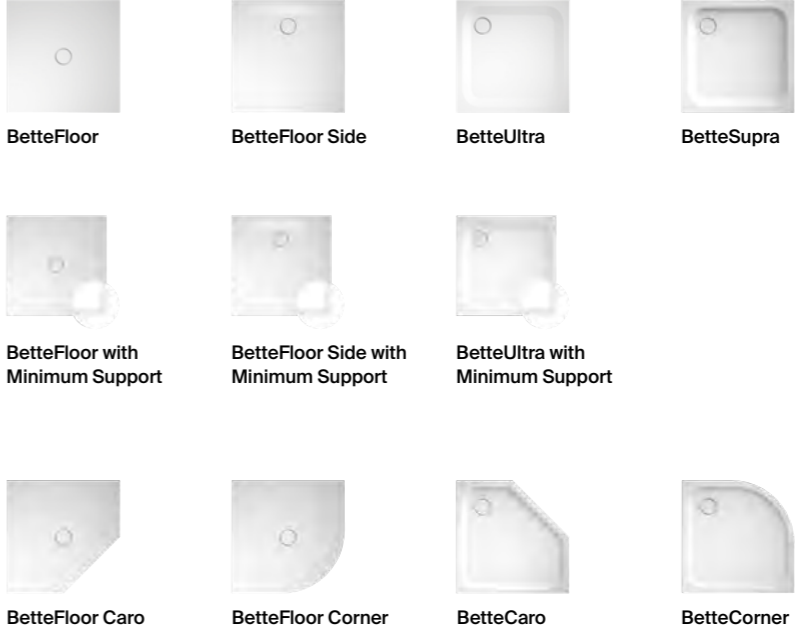

Links:

<p>Certificates</p>  <p>→ i.lead.me/bbCmlQ</p>	<p>Fact sheet</p>  <p>→ i.lead.me/bbCmlj</p>
--	--

Anti-Slip



BetteAnti-Slip

Increased safety when showering

BetteAnti-slip ensures reliable protection when showering. A quartz and sand mix is applied to the surface in the final firing. The pleasant feel and brilliant colour of the BetteGlaze® are retained. Recommended for all showers, as well as the showering area in baths.

Information


- The anti-slip finish can only be used on Silhouette baths in combination with the colour white.




BetteAnti-Slip is anti-slip as per rating group B for wet-loaded barefoot areas DIN 51097.

Shower areas in combination with BetteAnti-Slip comply with DIN 18040-2 Construction of accessible buildings - Part 2: Dwellings: BetteFloor 1200 x 1200 mm, BetteFloor Side 1200 x 1200 mm, 1400 x 1200 mm, 1500 x 1200 mm, 1600 x 1200 mm

BetteAnti-Slip:

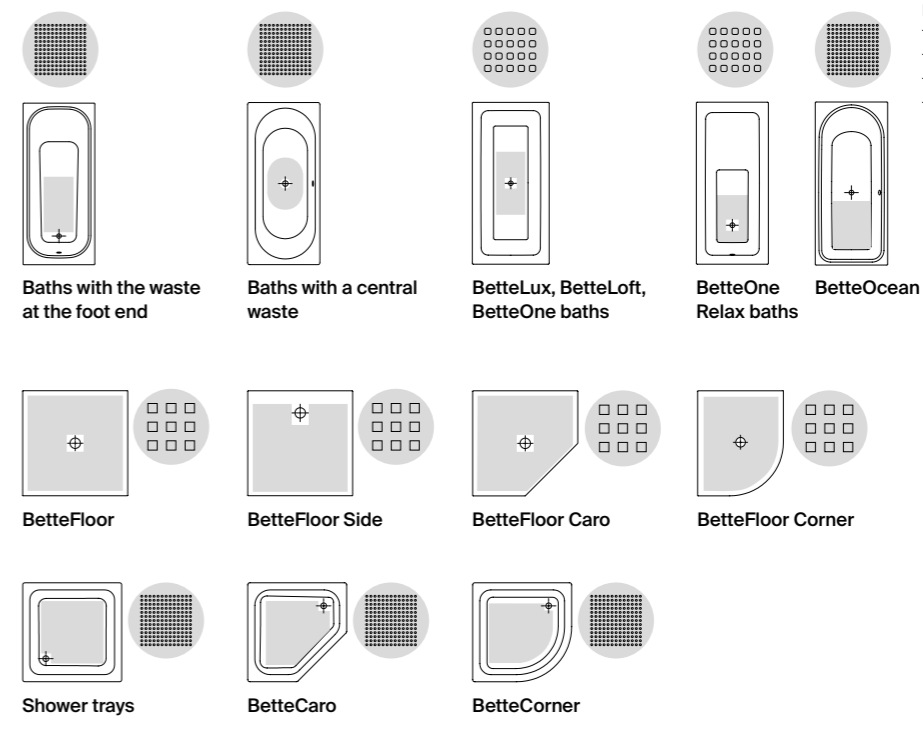


BetteAnti-Slip over the entire floor area:

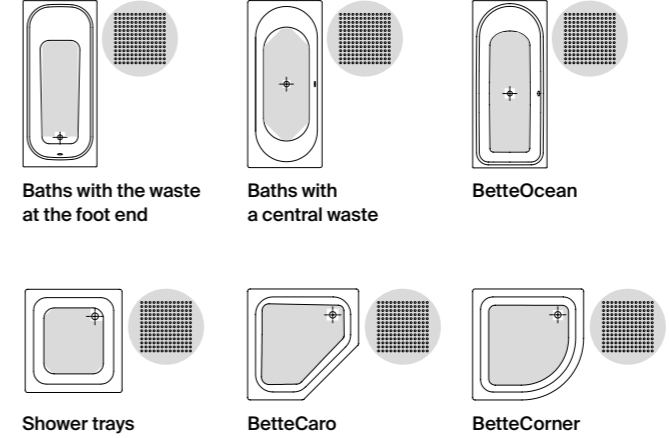

Links:



Anti-Slip

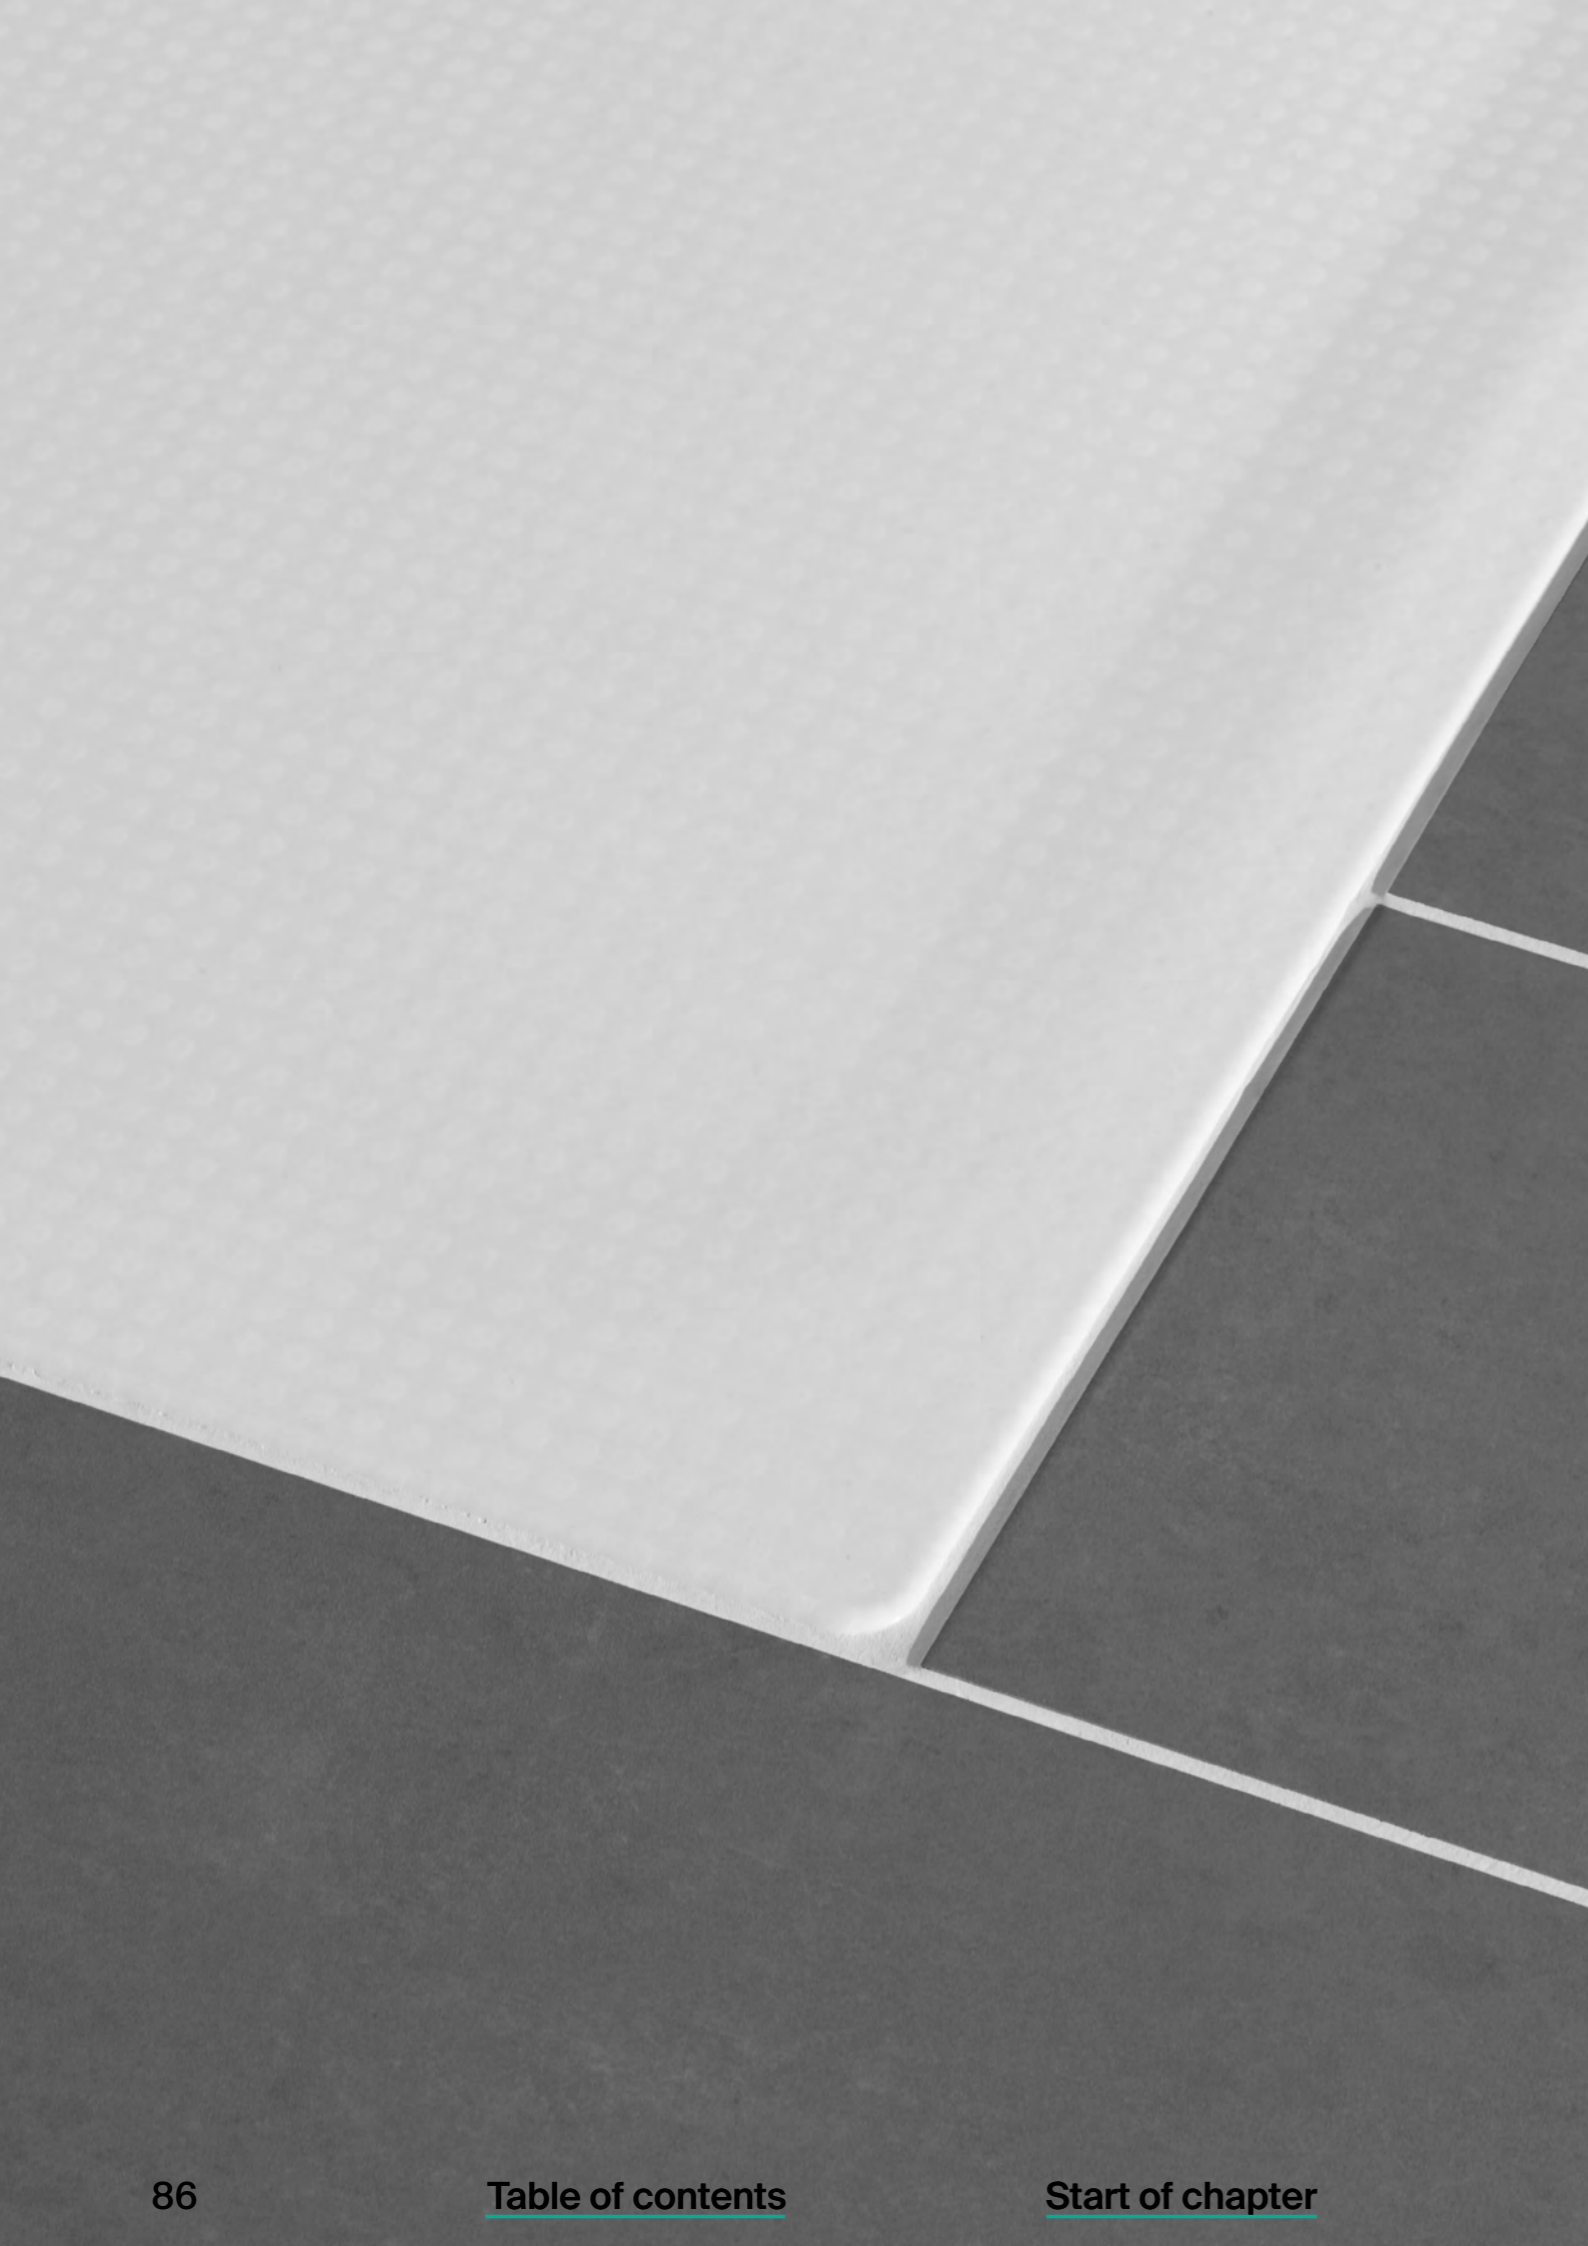

BetteAnti-Slip barrier-free


Comprehensive anti-slip protection for flush-to-floor showers. During the final firing process, a mixture of quartz and sand is fired into the surface to provide standing safety right to the outer rim. The pleasant feel and brilliant colour of the BetteGlaze® are retained.



The shower tray BetteUltra 1500 x 1500 mm in combination with BetteAnti-Slip barrier-free complies with DIN 18040-1 Construction of accessible buildings - Part 1: Publicly accessible buildings and DIN 18040-2 Construction of accessible buildings - Part 2: Dwellings.

Shower trays in combination with BetteAnti-Slip barrier-free comply with DIN 18040-2 Construction of accessible buildings - Part 2: Dwellings: BetteUltra 1200 x 1200 mm, 1300 x 1300 mm, 1400 x 1400 mm, 1500 x 1500 mm


BetteAnti-Slip barrier-free



Links:



BetteUpstand

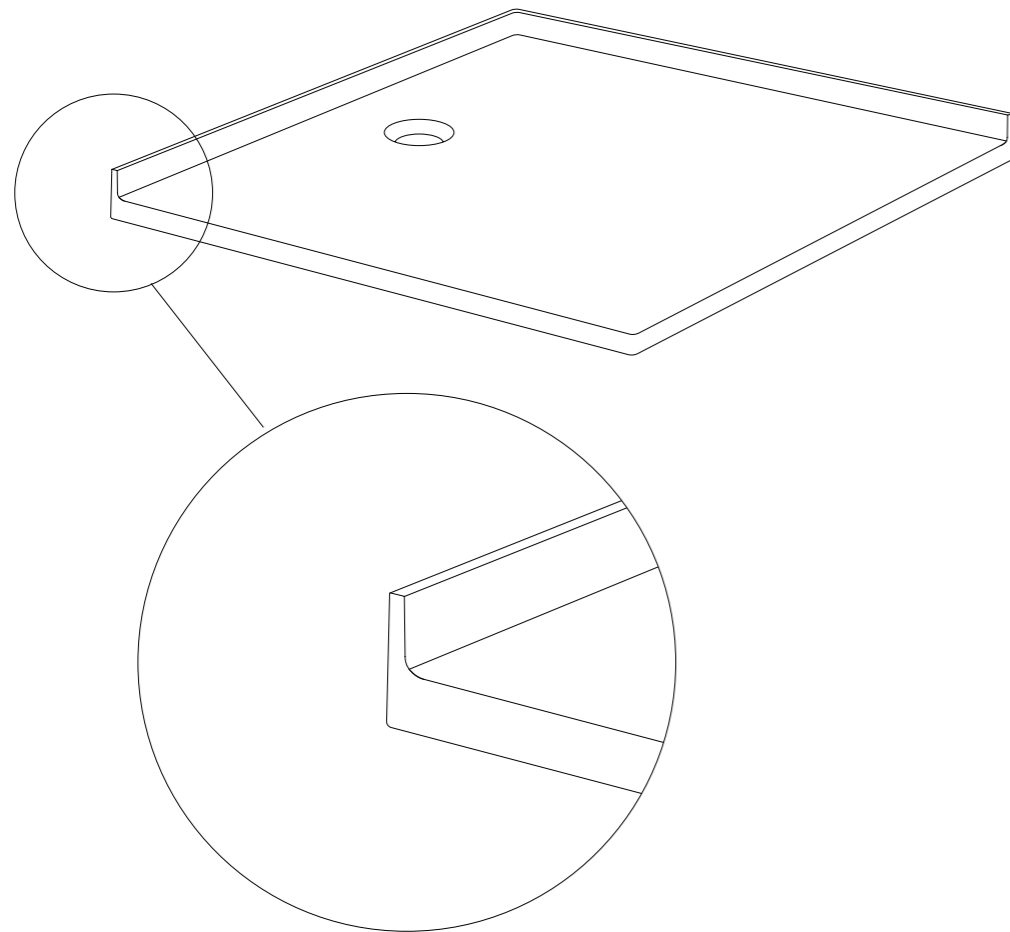

BetteUpstand Perfect safety in the bathroom

Porous silicone joints are a problem in lots of bathrooms. Water can pass through them and into the brickwork, causing tremendous damage.

The solution: a silicone-free connection in glazed titanium steel - BetteUpstand. It extends the edges of baths and showers to below the tiling, and eliminates the needs for silicone. This completely maintenance-free connection to the wall not only looks fantastic, but is extremely hygienic, too.

For the BetteUpstand, the rim in titanium steel is extended by 3 mm, turned up and glazed, and then simply tiled over on installation.

The BetteUpstand can be tiled in the classic manner or installed with seamless walls in genuine glass or waterproof HPL composite panels.

Information

You will find an overview of the models that are available with BetteUpstand under the link „Ordering tool“.

When ordering the bath or shower, please state the exact position of the upstand. You will find the corresponding ordering tools on pages 96 – 97.

Shower trays with side dimension > 1200 mm and BetteFloor Side shower areas with side dimension of ≥ 1200 mm are supplied with a rim height of 50 mm. The height of the upstand is unchanged at 35 mm.

We recommend the Basic or foot system for the installation of our shower trays and shower areas with BetteUpstand. The installation systems Floor-level and Universal cannot be used.

We offer an additional sealing set for flush-to-floor installation for the transition to the finished floor, order no. B57-0080.

Certification

For wall seals to industry standards as per DIN 18534-1.

Included in the delivery

- Insulating tapes
- Sealing fleece (pre-assembled at works)



Waterproof
ETAG 022
DIN 18534

DIN 18534 requires baths and shower trays to be specially sealed.

[→ Page 57](#)



Noise level only
23dB(A) as per
DIN 4109
VDI 4100*²

*² structural conditions as per test report.

Can be combined with: You will find the possible combinations for BetteUpstand on pages 96 – 97. BetteUpstand is available for any production combination. You will find an overview of these combinations in the price list.

Links:

Product film



[→ i.lead.me/bbCjpS](https://i.lead.me/bbCjpS)

Installation film



[→ i.lead.me/bbCjSl](https://i.lead.me/bbCjSl)

Ordering tool



[→ i.lead.me/bbCmJJ](https://i.lead.me/bbCmJJ)

Certificates



[→ i.lead.me/bbCmJz](https://i.lead.me/bbCmJz)

Topic page



[→ i.lead.me/bbCmlz](https://i.lead.me/bbCmlz)

90	Free choice of wall covering
91	Made-to-measure for any room situation
92 – 93	BetteUpstand with shower screens
94	Example of the wall construction of a shower / bath with BetteUpstand
95	Installation steps
96 – 97	BetteUpstand installation aids
98 – 99	BetteUpstand codes

Free choice of wall covering

The BetteUpstand can be tiled in the classic manner or installed with seamless walls in genuine glass or waterproof HPL composite panels.

- 1. HPL panel
- 2. Real glass
- 3. Tile




Made-to-measure for any room situation

1. Shortened for corner and niche installations with baths, shower trays and shower areas BetteFloor Side

2. Upstand to size

The BetteUpstand can also be specifically adapted for corners and niches where the wall does not continue. We recommend setting the upstand back by 10 mm. The front can be cleanly tiled over, retaining the clear joint line of the tiled surface. The sides of the bath and shower which BetteUpstand is to be shortened are determined by the individual installation situation. Bette will shorten the upstands for one or both sides on request.

So you can enjoy the benefits of BetteUpstand even with unusual room geometries or planning projects, we will adapt the upstands individually for our baths, shower trays and shower areas in accordance with a given drawing. Thanks to this flexibility, the BetteUpstand can be integrated into virtually any bathroom architecture.

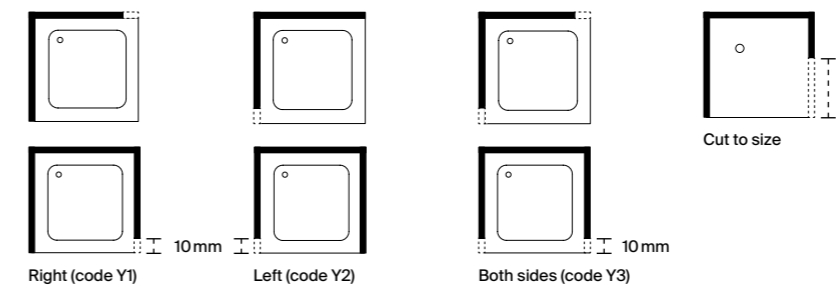

BetteUpstand with shower screens

BetteUpstand can be combined with various shower screens, ranging from unframed to profiled versions. The diagrams on this page illustrate the connection.

Unframed with U-profile


With wall extension



Without wall extension, shortened upstand



The U-profile is surrounded by the tiles

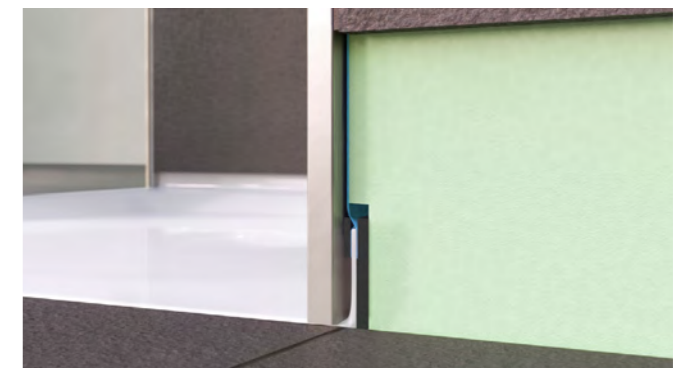

Shortened upstand with a U-profile shower screen

Shower screens with fittings

With wall extension



Without wall extension, shortened upstand



The fitting goes in front of the trimmed tile (no additional joints)



Tile cut to size


Shower screens with profiles

With wall extension



A small piece of tile is placed behind the shower screen in order to close the hollow space

Example of the wall construction of a shower / bath with BetteUpstand

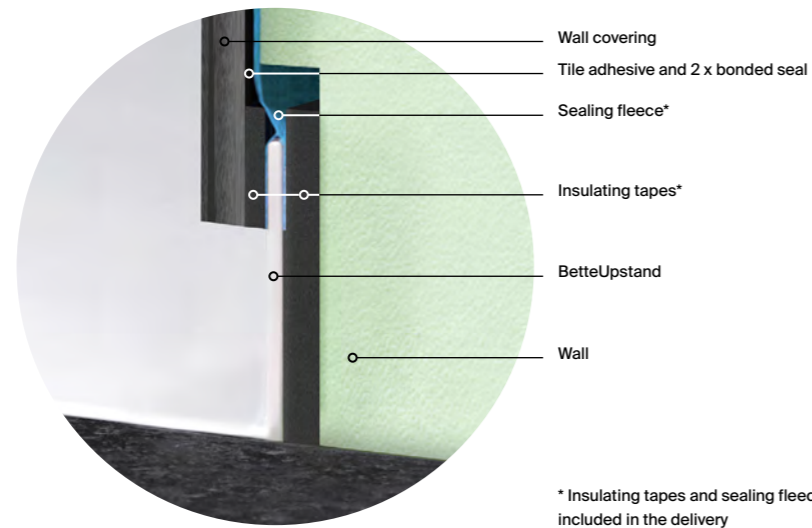


* Insulating tapes and sealing fleece are included in the delivery


Establishing the shell dimension

To establish the shell dimension, please use the external dimensions of the bath and add 7 mm to the outer dimensions.

Example 7 mm:

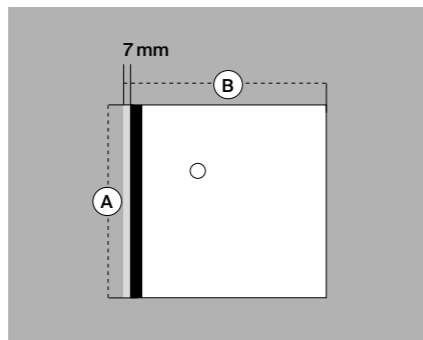

Wall installation




The BetteUpstand is on dimension A on the left side.

$$A = 900 \text{ mm}$$

$$B = 900 \text{ mm} + 7 \text{ mm}$$

Corner installation




The BetteUpstand is on dimension A on the left side and on dimension B at the top.

$$A = 900 \text{ mm} + 7 \text{ mm}$$

$$B = 900 \text{ mm} + 7 \text{ mm}$$

Niche installation



The BetteUpstand is on dimension A on the left and right sides and on dimension B at the top.


$$A = 900 \text{ mm} + 7 \text{ mm}$$

$$B = 900 \text{ mm} + 7 \text{ mm} + 7 \text{ mm}$$

Installation steps


1. Preparing the wall

The principle applies for solid and lightweight construction: the walls are plastered as usual or covered with 2 lightweight panels. As the bath or shower tray with BetteUpstand is inset in the wall, the unfinished wall must be recessed by at least 11 mm (C) and the lightweight construction wall recessed by at least 12.5 mm (C).

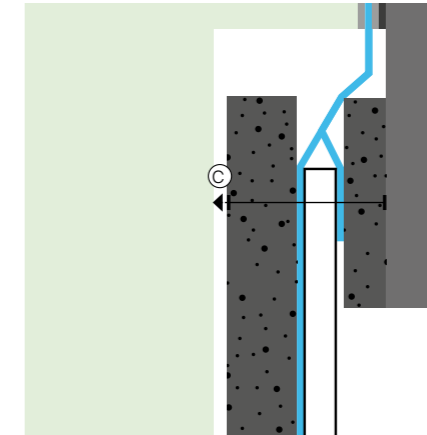


2. Preparing the bath or shower

Apply the insulating tape to the front of the sealing fleece (premounted at the factory), then attach flush to the top from behind.

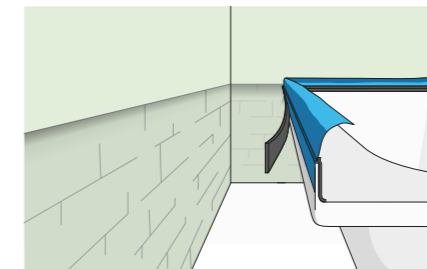


3. Fixing

Align the bath or shower tray and secure using the anchors (included). Then work the sealing fleece into the compound seal with waterproofing filler.

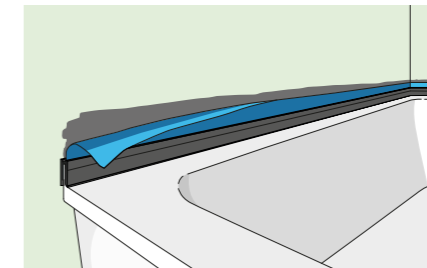

4. Tiling

Make sure that the tile ends flush against the perforation of the insulating tape. When you have finished tiling, you can detach the lower part of the insulating tape.

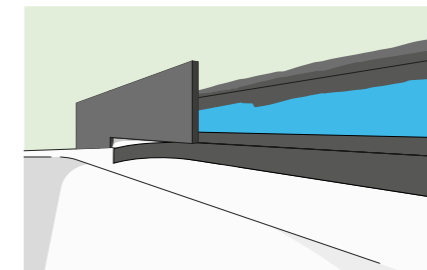

Installation film




→ [Lead.me/bbCjst](https://lead.me/bbCjst)


BetteUpstand installation aid in the corner

As the shower tray is installed in the wall with BetteUpstand, the installed dimension of the tray will change. Please remember this when planning the shower screen. The specified dimensions relate to the rendered rough state, without tiling.

Installation lightweight construction wall

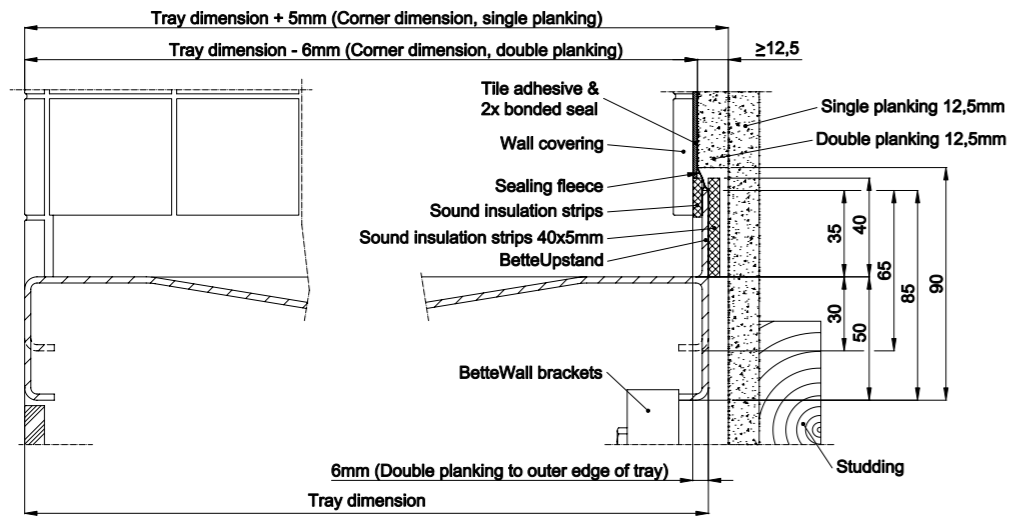


Installation solid construction wall

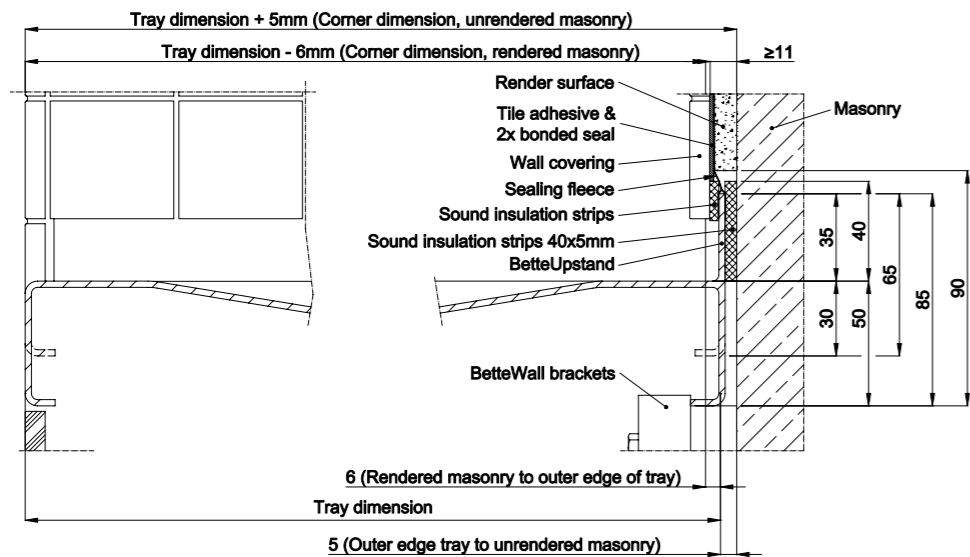


BetteUpstand installation aid in the niche

As the shower tray is installed in the wall with BetteUpstand, the installed dimension of the tray will change. Please remember this when planning the shower screen. The specified dimensions relate to the rendered rough state, without tiling.

Installation lightweight construction wall

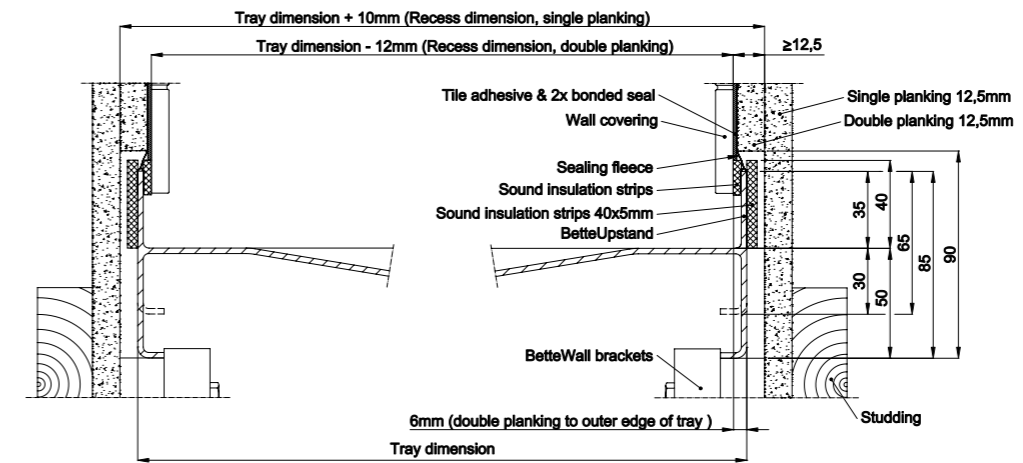


Installation solid construction wall

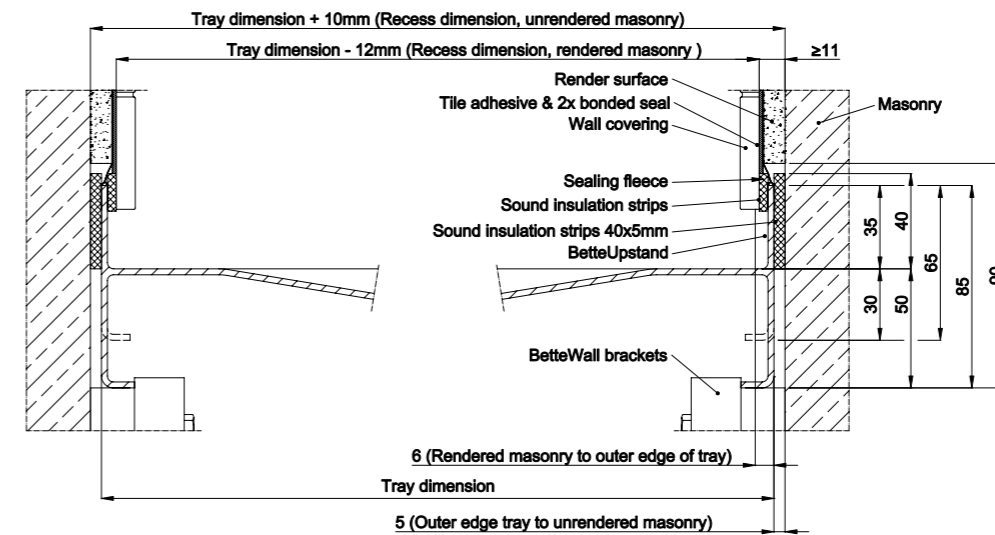


BetteUpstand codes for shower trays and shower areas


Square shower trays with side dimension < 1000 mm




Rectangular shower trays with side dimension < 1000 mm




Rectangular and square shower trays with side outlet, side dimension $\geq 1000 < 1600$ mm




Rectangular and square shower trays with side outlet, side dimension ≥ 1600 mm, shower areas BetteFloor side

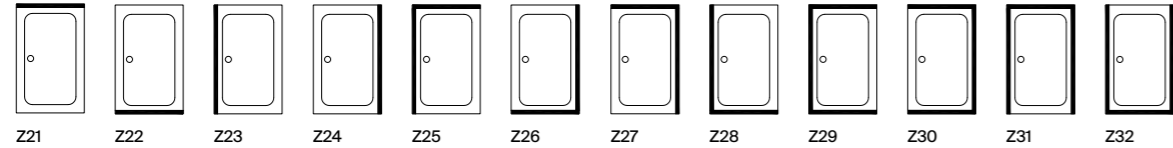

Quadrant




Pentagon




Shower trays with side dimension > 1200 mm and BetteFloor Side shower areas with side dimension of ≥ 1200 mm are supplied with a rim height of 50 mm. The height of the upstand is unchanged at 35 mm.

BetteUpstand codes for baths


Baths with the waste at the foot end

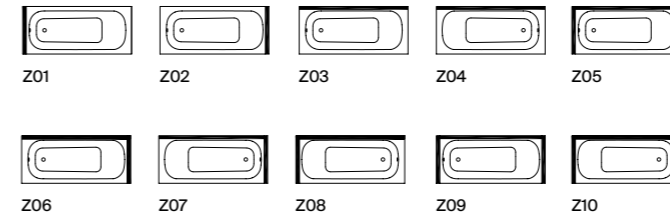


Baths with a central waste

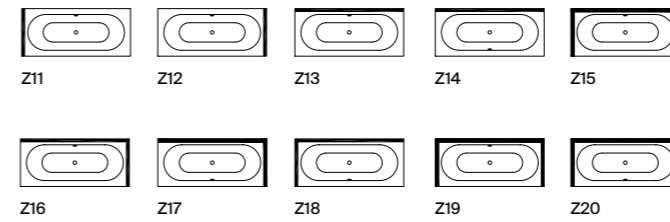


Baths with foot end right, overflow front (BetteComodo, BetteOcean, BetteSelect)

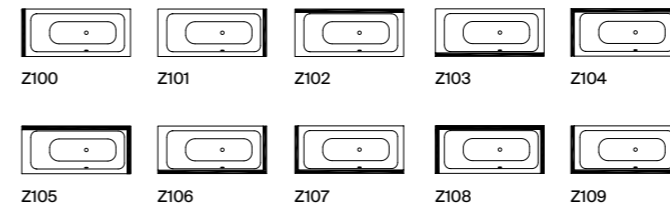

Baths with foot end right, overflow rear (BetteComodo, BetteOcean, BetteSelect)

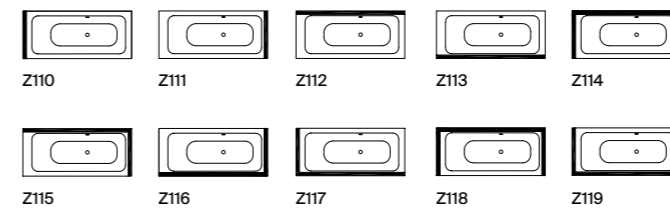

Shortening of the BetteUpstand

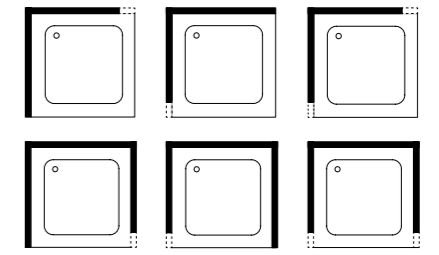

Right (code Y1) Left (code Y2) Both sides (code Y3)

Reductions in length for corner and niche installation by 10 mm. Please select your required reduction.

Material and products


102	Material
103	Material properties
104	Colour variety
106	Exclusive colours
107	Effect colours
108	Sanitaryware colours
109	BetteBicolour
110-111	Customised solutions
	Product overview
112-118	Baths
119-123	Shower areas and shower trays
124-125	Washbasins



Flawless and harder than marble



Experience glazed titanium steel
→ [Lead.me/bbCjpc](https://lead.me/bbCjpc)

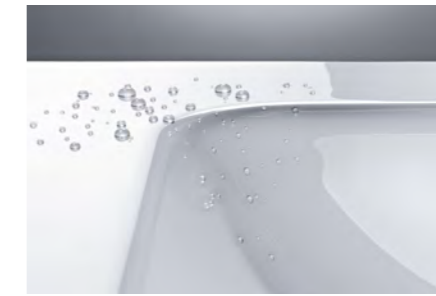

Hygienic



Heat conductive



Scratch resistant




Impact resistant



Resistant to chemicals



UV-resistant

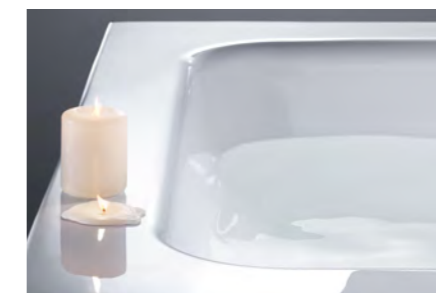

Heat-resistant











Quiet

Position of glazed titanium steel on Mohns hardness scale

Level of hardness	1	2	3	4	5	6	7	8	9	10
Material	Talcum	Plaster	Plastic	Marble	Iron	Steel	Email	Topaz	Sapphire	Diamond
Wear resistance	very low		low	sufficient	good		very good	exceptionally good		

Colour variety

Every Bette bathroom product is made individually and finished with the unique BetteGlaze. Whether white, anthracite, pink or curry: as the colour pigments are already added to the enamel while it is still in the raw condition, every Bette bathroom product made in our manufactory is entirely unique – in accordance with your wishes and the bathroom environment. In addition to all the classic sanitaryware colours, Bette also offers its glaze in numerous shades from a wide range of colour spectrums. Both gloss and matt colours are available.

	White 000	Sanitärfarben	Exclusive colours	Effect colours	Bette Bicolour
 Built-in baths	x	x		x*	
 Silhouette baths	x	x*		x*	x*
 Panelled baths	x	x*		x*	x*
 Shower trays	x	x	x*	x*	
 Shower areas	x	x	x	x*	
 Washbasins	x	x*		x*	
 Washbasin shell	x	x	x	x	
 Washbasin Monolith	x	x*			

If combining with extras, some colours may be excluded.
* Selected models/colours




Exclusive colours

Selection of exclusive matt colours, available for shower areas, shower trays to 65 mm and washbasins.



Effect colours

 High gloss

Effect colours belong to category 2. Can be combined with built-in baths, Silhouette baths, panelled baths, shower trays/shower areas and washbasins. Cannot be combined with BetteUpstand, washbasin Monolith.








































*** Only available for BetteCraft

Sanitaryware colours

High gloss

A selection of the available colours.


 Ägäis 009	 Caramel 046	 Ebony 035	 Key West 031	 Misty Pink 010	 Black 056
 Rubin red 057	 Carneol 096	 Ivory 014	 Magnolia 077	 Moos Green 016	 Sorento Blue 067
 Bermuda Blue 023	 Jasmin 006	 Evergreen 115	 Caspian Green 112	 Natura 038	 Stella 021
 Calypso 011	 Violet 124	 Flamingo21 060	 Misty Blue 049	 Pearl 053	 Sunset 013
 Camel 098	 Crocus 043	 Flanell 008	 Reflet Grey 044	 Cashmere 090	 Torre 148
 Capri 015	 Curry 040				
 Edelweiss 004	 Pergamon 001	 Manhattan 002	 Bahama beige 003	 Starwhite 287	

High gloss



Selected bath models can be fitted with a coloured panel.

 Glossy Black 350	 Matt Black 351	 Violet 352
---	---	---

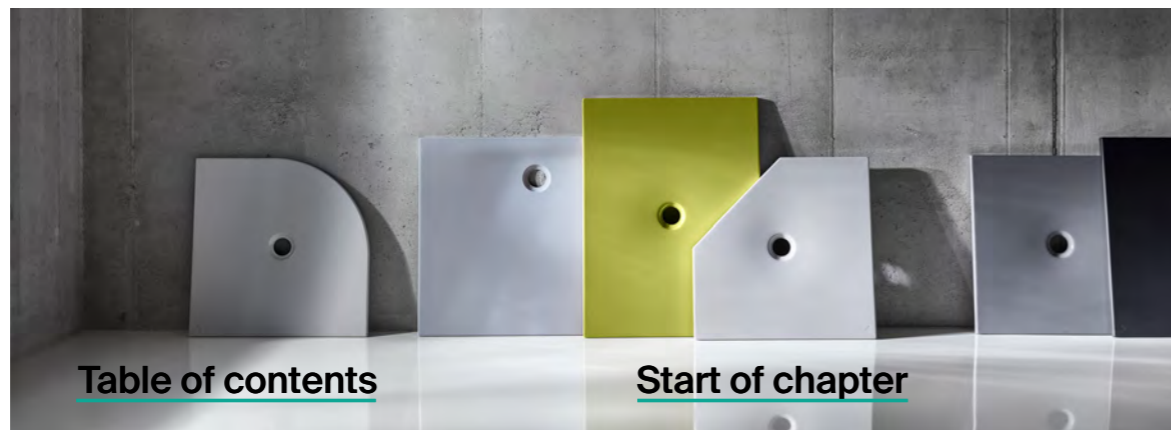

Customised solutions

The colours and dimensions of Bette products can be varied in almost any way imaginable, and create inspiring freedom for any bathroom design. As well as our wide range of models and dimensions, we also offer the option of manufacturing bathroom products to individual requirements during the production process at our works.

1. BetteUpstand

BetteUpstand lets you do away with silicone as a wall sealant around baths and shower trays. The 35-mm-high upward lip on the rim is fixed to the wall when the product is installed and covered over with 12.5 mm of tile. This 100% maintenance-free connection to the wall not only looks fantastic, but is extremely hygienic, too. BetteUpstand is an optional extra that can be ordered for a large number of baths and shower trays. You will find the details on pages 86–97.

2. Profi-Corner

It's surprising how one small corner can upset a whole bathroom design. This is why Bette offers a range of baths and shower trays with one of the corners cut off, in line with the customer's specifications. The perfect solution to work around challenging spaces and downpipes!

3. Special sizes


A few centimetres sometimes make the world of difference in bathroom design, especially when space is tight or an existing property is being renovated. We make planning easier with made-to-measure baths, shower floors and shower trays. The titanium steel cast is precisely cut to size before being enamelled, creating the optimal solution for the available space—which not only looks fantastic, but is extremely hygienic, too. There's no need to spend time doing an awkward patchwork job with tiles.

4. Drillings

An important detail when designing bath and washbasin areas is where to install the fittings. We can drill holes in all of our bathroom products before they leave the factory, in line with customer specifications for the selected bath/washbasin/shower fittings.

5. Whirlsystems

Many Bette baths can be equipped with a whirlpool system. The effervescing water creates that perfect spa feeling. Depending on the technology, you can enjoy pure relaxation or a massage. Systems that work with water alone produce a stronger massaging effect. If air is mixed with the water, the jet produced will be softer and more effervescing. The higher the percentage of air used, the more buoyancy will be created—perfect for a relaxing float! Adding coloured lights to the system ensures the ultimate sensual experience.

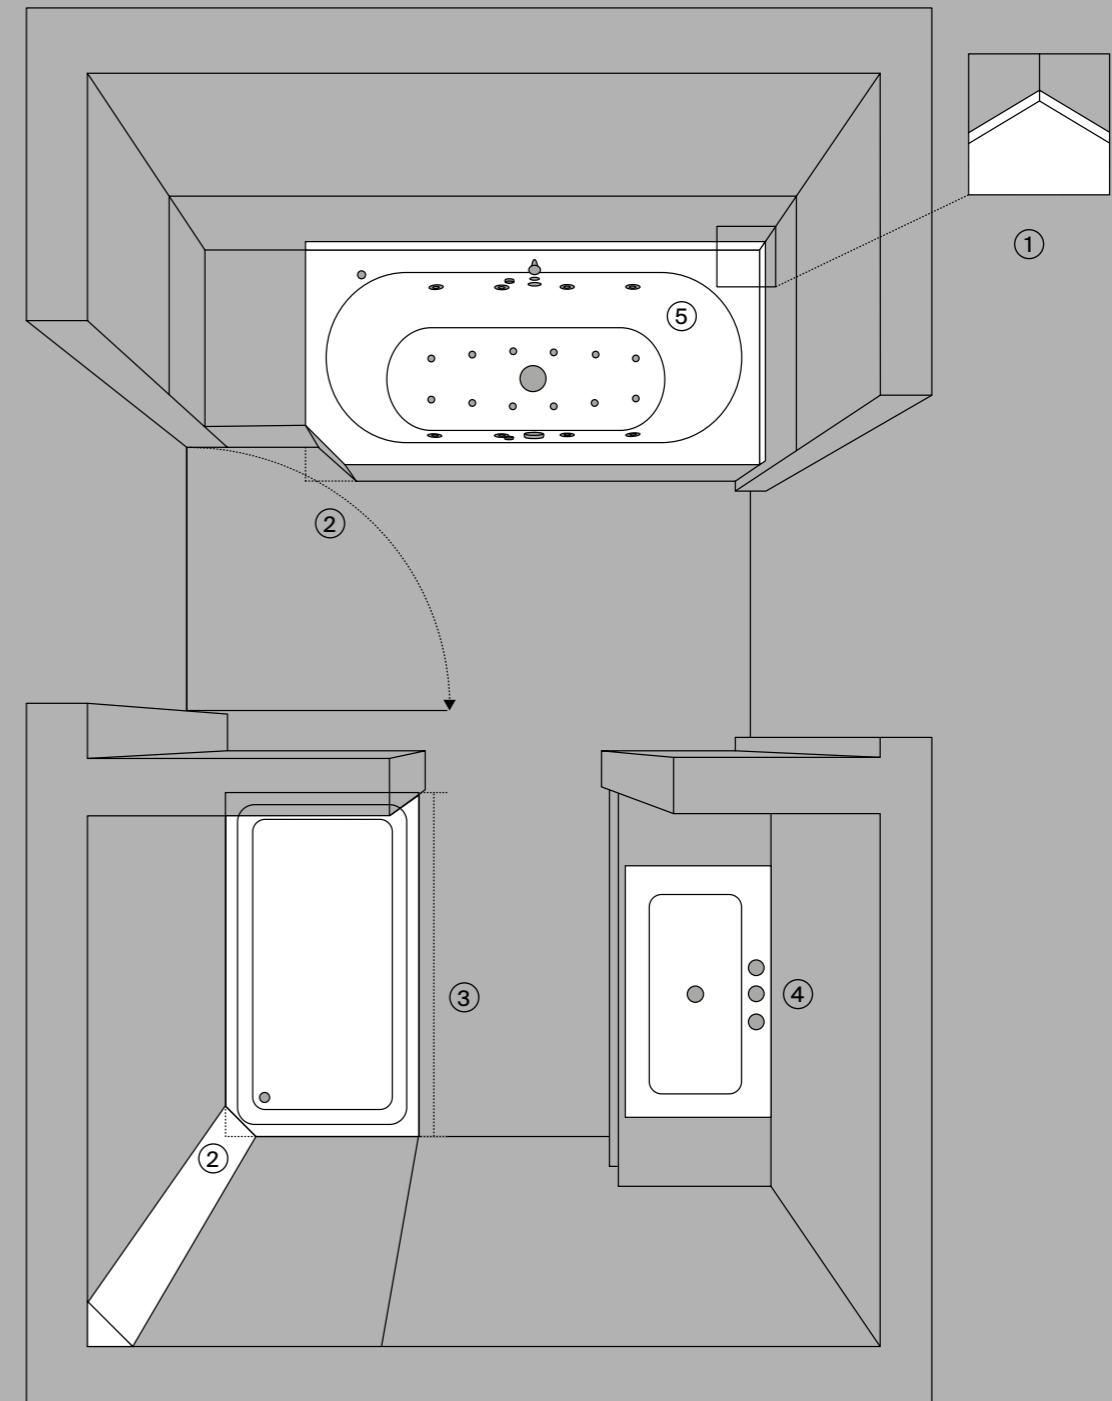

Product overview baths



BetteArco
L x W x D; Lying dimension
1400 x 1400 x 450; 1426
Rim height:
50

Art. No.
6035



BetteArt
L x W x D; Lying dimension
1800 x 750 x 420; 1564
Apron height:
560

Art. No.
3480 CFXK



BetteArt I
L x W x D; Lying dimension
1800 x 800 x 420; 1564
Apron height:
560

Art. No.
3480 CWWHK



BetteArt IV
L x W x D; Lying dimension
1850 x 800 x 420; 1564
Apron height:
560

Art. No.
3480 CERHK



BetteArt V
L x W x D; Lying dimension
1850 x 800 x 420; 1564
Apron height:
560

Art. No.
3480 CELHK



BetteBambino
L x W x D; Lying dimension
1570 x 650 x 420; 1280
1570 x 650 x 420; 1280
1570 x 700 x 420; 1280
1570 x 700 x 420; 1280
Rim height:
30

Nº 1
Nº 2
Nº 1
Nº 2

Art. No.
2770
2780
2570
2580



BetteClassic
L x W x D; Lying dimension
1400 x 700 x 450; 965
1500 x 700 x 450; 1070
1600 x 700 x 450; 1155
1600 x 750 x 450; 1170
1650 x 750 x 450; 1170
1700 x 700 x 450; 1265
1700 x 730 x 450; 1265
1700 x 750 x 450; 1260
Rim height:
30

Art. No.
1266 (New)
1268
1267 (New)
1269
1265 (New)
3108 (New)
3109 (New)
3110



BetteClassic
L x W x D; Lying dimension
1700 x 800 x 450; 1265
1750 x 750 x 450; 1265
1800 x 700 x 450; 1360
1800 x 750 x 450; 1360
1800 x 800 x 450; 1360
1900 x 800 x 450; 1460
Rim height:
30

Art. No.
3111 (New)
3112 (New)
1271
1272
1270
1273 (New)



BetteComodo
L x W x D; Lying dimension
1700 x 750 x 450; 1250
1700 x 800 x 450; 1250
1800 x 800 x 450; 1310
1900 x 900 x 450; 1380
Rim height:
20

Art. No.
1250
1253
1251
1252



BetteComodo with side overflow
L x W x D; Lying dimension
1700 x 750 x 450; 1250
1700 x 750 x 450; 1250
1700 x 800 x 450; 1250
1700 x 800 x 450; 1250
1800 x 800 x 450; 1310
1800 x 800 x 450; 1310
1900 x 900 x 450; 1380
1900 x 900 x 450; 1380
Rim height:
20

Nº 1
Nº 2
Nº 1
Nº 2
Nº 1
Nº 2
Nº 1
Nº 2

Art. No.
1620
1640
1623
1643
1621
1641
1622
1642



BetteDuett
L x W x D; Lying dimension
1700 x 750 x 420; 1210
1700 x 800 x 420; 1210
Rim height:
30

Nº 1
Nº 2

Art. No.
3020
3100



BetteDuo
L x W x D; Lying dimension
1800 x 800 x 420; 1280
Rim height:
30

Art. No.
3820

Product overview baths



BetteForm
L x W x D; Lying dimension
1400 x 700 x 420; 965
1500 x 700 x 420; 1070
1600 x 700 x 420; 1155
1600 x 750 x 420; 1170
1650 x 750 x 420; 1165
1700 x 700 x 420; 1265
1700 x 730 x 420; 1265
1700 x 750 x 420; 1260
Rim height:
30

Art. No.
2940
2941
2942
2943
2944
2945
2946
2947



BetteForm
L x W x D; Lying dimension
1700 x 800 x 420; 1265
1750 x 750 x 420; 1265
1800 x 800 x 420; 1360
1900 x 800 x 420; 1460
Rim height:
30

Art. No.
2948
2949
2950
2951



BetteFree
L x W x D; Lying dimension
1700 x 750 x 450; 1160
1800 x 800 x 450; 1260
1900 x 900 x 450; 1360
2000 x 1000 x 450; 1460
Rim height:
30

Art. No.
6829
6830
6831
6832



BetteHome Oval
L x W x D; Lying dimension
1800 x 1000 x 450; 1355
Rim height:
40

Art. No.
8994



BetteHome Oval Silhouette
L x W x D; Lying dimension
1800 x 1000 x 450; 1355
Apron height:
575

Art. No.
8994 CFXK



BetteLoft
L x W x D; Lying dimension
1700 x 800 x 420; 1223
1800 x 800 x 420; 1327
1900 x 900 x 420; 1426
Rim height:
8

Art. No.
3171
3172
3173



BetteLoft Ornament
L x W x D; Lying dimension
1810 x 810 x 420; 1327
Apron height:
620

Art. No.
3172 CFXK6A



BetteLuna
L x W x D; Lying dimension
1700 x 750 x 450; 1365
1700 x 750 x 450; 1365
Rim height:
30


Nº 1
Nº 2

Art. No.
2750
2760



BetteLux
L x W x D; Lying dimension
1700 x 750 x 450; 1270
1800 x 800 x 450; 1345
1900 x 900 x 450; 1420
Rim height:
8

Art. No.
3440
3441
3442



BetteLux Highline
L x W x D; Lying dimension
1800 x 800 x 450; 1345
1900 x 900 x 450; 1420
Apron height:
280

Art. No.
3441 CFXKH
3442 CFXKH



BetteLux Silhouette
L x W x D; Lying dimension
1700 x 750 x 450; 1270
1800 x 800 x 450; 1345
Apron height:
575

Art. No.
3440 CFXKS
3441 CFXKS



BetteLux Silhouette Side
L x W x D; Lying dimension
1700 x 850 x 450; 1270
1800 x 900 x 450; 1345
Apron height:
575

Art. No.
3460 CFXVS
3461 CFXVS

All dimensions in mm

Product overview baths



BetteLux I Silhouette Side

L x W x D; Lying dimension
1700 x 850 x 450; 1270
1800 x 900 x 450; 1345
Apron height:
575

Art. No.
3460 CWVVS
3461 CWVVS



BetteLux IV Silhouette Side

L x W x D; Lying dimension
1700 x 850 x 450; 1270
1800 x 900 x 450; 1345
Apron height:
575

Art. No.
3460 CERVS
3461 CERVS



BetteLux V Silhouette Side

L x W x D; Lying dimension
1700 x 850 x 450; 1270
1800 x 900 x 450; 1345
Apron height:
575

Art. No.
3460 CELVS
3461 CELVS



BetteLux Shape

L x W x D; Lying dimension
1700 x 750 x 450; 1270
1800 x 800 x 450; 1345
1900 x 900 x 450; 1420
Apron height:
585

Art. No.
3451
3452
3453



BetteLux Oval

L x W x D; Lying dimension
1700 x 750 x 450; 1270
1800 x 800 x 450; 1340
1900 x 900 x 450; 1420
Rim height:
8

Art. No.
3465
3466
3467



BetteLux Oval Couture

L x W x D; Lying dimension
1800 x 800 x 450; 1340
Apron height:
588

Art. No.
3466 TX



BetteLux Oval Highline

L x W x D; Lying dimension
1800 x 800 x 450; 1340
1900 x 900 x 450; 1420
Apron height:
280

Art. No.
3466 CFXXH
3467 CFXXH



BetteLux Oval Silhouette

L x W x D; Lying dimension
1700 x 750 x 450; 1270
1800 x 800 x 450; 1340
1900 x 900 x 450; 1420
Apron height:
575

Art. No.
3465 CFXXS
3466 CFXXS
3467 CFXXS



BetteLux Oval I Silhouette

L x W x D; Lying dimension
1700 x 800 x 450; 1270
1800 x 850 x 450; 1340
1900 x 950 x 450; 1420
Apron height:
575

Art. No.
3415 CWVVS
3416 CWVVS
3417 CWVVS



BetteLux Oval IV Silhouette

L x W x D; Lying dimension
1750 x 800 x 450; 1270
1850 x 850 x 450; 1340
1950 x 950 x 450; 1420
Apron height:
575

Art. No.
3425 CERVS
3426 CERVS
3427 CERVS



BetteLux Oval V Silhouette

L x W x D; Lying dimension
1750 x 800 x 450; 1270
1850 x 850 x 450; 1340
1950 x 950 x 450; 1420
Apron height:
575

Art. No.
3435 CELVS
3436 CELVS
3437 CELVS



N° 1

N° 2

BetteMetric

L x W x D; Lying dimension
2060 x 900 x 450; 1470
2060 x 900 x 450; 1470
Rim height:
30

Art. No.
6840
6841

Product overview baths



N° 1



N° 2

BetteOcean

L x W x D; Lying dimension
1500 x 700 x 450; 1235
1500 x 700 x 450; 1235
1600 x 700 x 450; 1335
1600 x 700 x 450; 1335
1700 x 700 x 450; 1335
1700 x 700 x 450; 1335
1700 x 750 x 450; 1435
1700 x 750 x 450; 1435

Art. No.
N° 1 8858
N° 2 8859
N° 1 8850
N° 2 8851
N° 1 8852
N° 2 8853
N° 1 8854
N° 2 8855

Rim height:
40



N° 1



N° 2

BetteOcean

L x W x D; Lying dimension
1700 x 800 x 450; 1435
1700 x 800 x 450; 1435
1800 x 800 x 450; 1535
1800 x 800 x 450; 1535
Rim height:
40

Art. No.
N° 1 8765
N° 2 8865
N° 1 8856
N° 2 8857



N° 1



N° 2

BetteOcean Low-Line

L x W x D; Lying dimension
1500 x 700 x 380; 1235
1500 x 700 x 380; 1235
1600 x 700 x 380; 1335
1600 x 700 x 380; 1335
1700 x 700 x 380; 1335
1700 x 700 x 380; 1335
1700 x 750 x 380; 1435
1700 x 750 x 380; 1435

Art. No.
N° 1 8841
N° 2 8842
N° 1 8830
N° 2 8831
N° 1 8832
N° 2 8833
N° 1 8834
N° 2 8835

Rim height:
40



N° 1



N° 2

BetteOcean Low-Line

L x W x D; Lying dimension
1700 x 800 x 380; 1435
1700 x 800 x 380; 1435
1800 x 800 x 380; 1535
1800 x 800 x 380; 1535

Art. No.
N° 1 8836
N° 2 8837
N° 1 8838
N° 2 8839

Rim height:
40



BetteOne

L x W x D; Lying dimension
1600 x 700 x 420; 1250
1700 x 700 x 420; 1340
1700 x 750 x 420; 1340
1800 x 800 x 420; 1420
1900 x 900 x 420; 1515

Art. No.
3310
3311
3312
3313
3314

Rim height:
20



BetteOne Highline

L x W x D; Lying dimension
1800 x 800 x 420; 1420
1900 x 900 x 420; 1515
Apron height:
280

Art. No.
3313 CFXXH
3314 CFXXH



BetteOne Relax

L x W x D; Lying dimension
1800 x 800 x 450; 1080
1900 x 900 x 450; 1165
2000 x 900 x 450; 1285

Art. No.
3323
3324
3325

Rim height:
20



BetteOne Relax Highline

L x W x D; Lying dimension
1800 x 800 x 450; 1080
1900 x 900 x 450; 1165
Apron height:
280

Art. No.
3323 CFXXH
3324 CFXXH

Rim height:
20



BettePond

L x W x D; Lying dimension
1500 x 1500 x 450; 1235
Rim height:
8

Art. No.
6045



BettePond Silhouette

L x W x D; Lying dimension
1500 x 1500 x 450; 1235
Apron height:
575

Art. No.
6045 CFXXS



BettePool Oval

L x W x D; Lying dimension
1640 x 960 x 450; 1215
Rim height:
40

Art. No.
6050



N° 1



N° 2

BettePool I

L x W x D; Lying dimension
1610 x 1020 x 450; 1215
1610 x 1020 x 450; 1215
Rim height:
40

Art. No.
N° 1 6052
N° 2 6053

All dimensions in mm

Product overview baths



BettePool I Panel
L x W x D; Lying dimension
1610 x 1020 x 450; 1215 Nº 1 6052 CERV
1610 x 1020 x 450; 1215 Nº 2 6053 CELV
Apron height:
560



BettePool II
L x W x D; Lying dimension
1640 x 960 x 450; 1215 Nº 1 6054
1640 x 960 x 450; 1215 Nº 2 6055
Rim height:
40



BettePool II Panel Corner Installation
L x W x D; Lying dimension
1640 x 960 x 450; 1215 Nº 1 6054 CERV
1640 x 960 x 450; 1215 Nº 2 6055 CELV
Apron height:
560



BettePool III
L x W x D; Lying dimension
1600 x 1130 x 450; 1215 Nº 1 6056
1600 x 1130 x 450; 1215 Nº 2 6057
Rim height:
30



BettePool III Panel Corner Installation
L x W x D; Lying dimension
1600 x 1130 x 450; 1215 Nº 1 6056 CCVV
1600 x 1130 x 450; 1215 Nº 2 6057 CCVV
Apron height:
560



BetteSelect
L x W x D; Lying dimension
1600 x 700 x 420; 1199 Art. No. 3410
1700 x 700 x 420; 1299 Art. No. 3411
1700 x 750 x 420; 1299 Art. No. 3412
1800 x 800 x 420; 1399 Art. No. 3413
Rim height:
30



BetteSelect with side overflow
L x W x D; Lying dimension
1600 x 700 x 420; 1199 Nº 1 3420
1600 x 700 x 420; 1199 Nº 2 3430
1700 x 700 x 420; 1299 Nº 1 3421
1700 x 700 x 420; 1299 Nº 2 3431
1700 x 750 x 420; 1299 Nº 1 3422
1700 x 750 x 420; 1299 Nº 2 3432
1800 x 800 x 420; 1399 Nº 1 3423
1800 x 800 x 420; 1399 Nº 2 3433
Rim height:
30



BetteSet
L x W x D; Lying dimension
1500 x 750 x 380; 1195 Art. No. 2560
1600 x 700 x 380; 1235 Art. No. 3650
1600 x 750 x 380; 1250 Art. No. 3660
1650 x 750 x 380; 1250 Art. No. 3560
1700 x 750 x 380; 1350 Art. No. 3060
1700 x 800 x 380; 1350 Art. No. 3760
1800 x 800 x 380; 1435 Art. No. 3860
Rim height:
30



BetteSetline
L x W x D; Lying dimension
1690 x 725 x 390; 1400 Art. No. 8890
1700 x 700 x 390; 1400 Art. No. 8880
Rim height:
30



BetteSpa
L x W x D; Lying dimension
1700 x 1200 x 450; 1410 Nº 1 6860
1700 x 1200 x 450; 1410 Nº 2 6861
Rim height:
95



BetteSpace S
L x W x D; Lying dimension
1700 x 750 x 420; 1340 Nº 1 1130
1700 x 750 x 420; 1340 Nº 2 1140
Rim height:
30



BetteSpace M
L x W x D; Lying dimension
1700 x 900 x 420; 1346 Nº 1 1131
1700 x 900 x 420; 1346 Nº 2 1141
Rim height:
30

Product overview baths



BetteSpace L
L x W x D; Lying dimension
1700 x 1300 x 420; 1341 Nº 1 1132
1700 x 1300 x 420; 1341 Nº 2 1142
Rim height:
30



BetteStarlet
L x W x D; Lying dimension
1500 x 800 x 420; 1070 Art. No. 1210
1570 x 700 x 420; 1170 Art. No. 2590
1600 x 650 x 420; 1170 Art. No. 2540
1600 x 700 x 420; 1170 Art. No. 1220
1650 x 700 x 420; 1170 Art. No. 1230
1700 x 700 x 420; 1270 Art. No. 1730
1700 x 750 x 420; 1270 Art. No. 1380
1750 x 800 x 420; 1270 Art. No. 1450
Rim height:
30



BetteStarlet
L x W x D; Lying dimension
1800 x 750 x 420; 1370 Art. No. 1430
1800 x 800 x 420; 1370 Art. No. 1630
1850 x 850 x 420; 1370 Art. No. 1631
1900 x 900 x 420; 1465 Art. No. 1830
Rim height:
30



BetteStarlet Spirit
L x W x D; Lying dimension
1700 x 750 x 420; 1270 Art. No. 1384
1800 x 800 x 420; 1370 Art. No. 1634
Rim height:
8



BetteStarlet I
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 8300
1750 x 800 x 420; 1270 Art. No. 8310
1850 x 850 x 420; 1370 Art. No. 8320
Rim height:
30



BetteStarlet I Silhouette
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 8300 CWVVK
1750 x 800 x 420; 1270 Art. No. 8310 CWVVK
1850 x 850 x 420; 1370 Art. No. 8320 CWVVK
1950 x 950 x 420; 1470 Art. No. 8325 CWVVK
Apron height:
575



BetteStarlet II
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 8330
1750 x 800 x 420; 1270 Art. No. 8340
1850 x 850 x 420; 1370 Art. No. 8350
Rim height:
30



BetteStarlet III
L x W x D; Lying dimension
1810 x 750 x 420; 1170 Art. No. 8360
1920 x 800 x 420; 1270 Art. No. 8370
2030 x 850 x 420; 1370 Art. No. 8380
Rim height:
30



BetteStarlet IV
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 8360
1750 x 800 x 420; 1270 Art. No. 8370
1850 x 850 x 420; 1370 Art. No. 8380
Rim height:
30



BetteStarlet IV Silhouette
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 6650 CERVK
1750 x 800 x 420; 1270 Art. No. 6660 CERVK
1850 x 850 x 420; 1370 Art. No. 6670 CERVK
1950 x 950 x 420; 1470 Art. No. 6677 CERVK
Apron height:
575



BetteStarlet V
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 6680
1750 x 800 x 420; 1270 Art. No. 6690
1850 x 850 x 420; 1370 Art. No. 6700
Rim height:
30



BetteStarlet V Silhouette
L x W x D; Lying dimension
1650 x 750 x 420; 1170 Art. No. 6680 CELVK
1750 x 800 x 420; 1270 Art. No. 6690 CELVK
1850 x 850 x 420; 1370 Art. No. 6700 CELVK
1950 x 950 x 420; 1470 Art. No. 6720 CELVK
Apron height:
575

All dimensions in mm

Product overview baths



BetteStarlet Flair Oval
L x W x D; Lying dimension
1580 x 680 x 420; 1170
1680 x 730 x 420; 1270
1780 x 780 x 420; 1370
1880 x 880 x 420; 1465
Rim height:
30

Art. No.
8772
8773
8774
8775



BetteStarlet Octa
L x W x D; Lying dimension
1600 x 700 x 420; 1170
1700 x 750 x 420; 1270
1800 x 800 x 420; 1370
Rim height:
50

Art. No.
2330
2350
2370



BetteStarlet Oval
L x W x D; Lying dimension
1500 x 800 x 420; 1070
1650 x 750 x 420; 1170
1750 x 800 x 420; 1270
1850 x 850 x 420; 1370
1950 x 950 x 420; 1465
Rim height:
30

Art. No.
2700
2720
2680
2740
2745



BetteStarlet Oval Silhouette
L x W x D; Lying dimension
1500 x 800 x 420; 1070
1650 x 750 x 420; 1170
1750 x 800 x 420; 1270
1850 x 850 x 420; 1370
1950 x 950 x 420; 1470
Apron height:
575

Art. No.
2700 CFXK
2720 CFXK
2680 CFXK
2740 CFXK
2745 CFXK



BetteStarlet Hexagonal
L x W x D; Lying dimension
1880 x 700 x 420; 1170
2000 x 750 x 420; 1270
2100 x 800 x 420; 1370
Rim height:
50

Art. No.
2040
2060
2080



BetteHip Bath
L x W x D
1050 x 650 x 420
1180 x 730 x 420
Rim height:
30

Art. No.
1050
1060



LaBette
L x W x D; Lying dimension
1080 x 730 x 380; 865
1180 x 730 x 380; 945
1200 x 700 x 390; 920
1240 x 700 x 420; 925
1300 x 700 x 390; 995
Rim height:
30

Art. No.
1080
1180
1200
1240
1300

Product overview shower areas



BetteFloor
L x W:
800 x 800
900 x 700
900 x 750
900 x 800
900 x 900
1000 x 700
1000 x 750
1000 x 800
1000 x 900
1000 x 1000
1100 x 750
1100 x 800
1100 x 900
1100 x 1000
1200 x 700
1200 x 750
1200 x 800
1200 x 900
1200 x 1000
1200 x 1200
1300 x 750
1300 x 800
1300 x 900
1300 x 1000
1400 x 700
1400 x 750
1400 x 800
1400 x 900
1400 x 1000
1500 x 700
1500 x 750
1500 x 800
1500 x 900
1500 x 1000
1600 x 700
1600 x 750
1600 x 800
1600 x 900
1600 x 1000
1700 x 750
1700 x 800
1700 x 900
1700 x 1000
1800 x 800
1800 x 900
1800 x 1000

Art. No.
5831
5711
5841
8751
5931
5881
1651
5491
1661
5941
8732
8731
8631
8735
1672
1671
1681
1261
8661
8721
5797
5793
5791
5794
5803
5802
5801
5836
5851
5938
5939
5937
5936
5946
5948
5949
5957
5966
5969
5994
5989
5991
5817
5981
5988
5818



BetteFloor Side
L x W:
900 x 900
1000 x 800
1000 x 900
1000 x 1000
1100 x 800
1100 x 900
1200 x 800
1200 x 900
1200 x 1000
1200 x 1200
1300 x 900
1300 x 1000
1400 x 800
1400 x 900
1400 x 1000
1400 x 1200
1500 x 900
1500 x 1000
1500 x 1200
1600 x 800
1600 x 900
1600 x 1000
1600 x 1200
1700 x 900
1800 x 900
1800 x 1000

Art. No.
3381
3388
3385
3382
3374
3396
3387
3380
3383
3391
3398
3399
3379
3384
3386
3394
3393
3389
3395
3375
3390
3397
3392
3376
3377
3378



BetteFloor with Minimum-Support
L x W:
800 x 800
900 x 700
900 x 750
900 x 800
900 x 900
1000 x 700
1000 x 750
1000 x 800
1000 x 900
1000 x 1000
1100 x 750
1100 x 800
1100 x 900
1100 x 1000
1200 x 700
1200 x 750
1200 x 800
1200 x 900
1200 x 1000
1200 x 1200
1300 x 750
1300 x 800
1300 x 900
1300 x 1000
1400 x 700
1400 x 750
1400 x 800
1400 x 900
1400 x 1000
1500 x 700
1500 x 750
1500 x 800
1500 x 900
1500 x 1000
1600 x 700
1600 x 750
1600 x 800
1600 x 900
1600 x 1000
1700 x 750
1700 x 800
1700 x 900
1700 x 1000
1800 x 800
1800 x 900
1800 x 1000

Art. No.
5831 T1
5711 T1
5841 T1
8751 T1
5931 T1
5881 T1
1651 T1
5491 T1
1661 T1
5941 T1
8732 T1
8731 T1
8631 T1
8735 T1
1672 T1
1671 T1
1681 T1
1261 T1
8661 T1
8721 T1
5797 T1
5793 T1
5791 T1
5794 T1
5803 T1
5802 T1
5801 T1
5836 T1
5851 T1
5938 T1
5939 T1
5937 T1
5936 T1
5946 T1
5948 T1
5949 T1
5957 T1
5966 T1
5969 T1
5994 T1
5989 T1
5991 T1
5817 T1
5981 T1
5988 T1
5818 T1

Product overview shower areas



BetteFloor Side with Minimum Support

L x W:	Art. No.
900 x 900	3381 T1
1000 x 800	3388 T1
1000 x 900	3385 T1
1000 x 1000	3382 T1
1100 x 800	3374 T1
1100 x 900	3396 T1
1200 x 800	3387 T1
1200 x 900	3380 T1
1200 x 1000	3383 T1
1200 x 1200	3391 T1
1300 x 900	3398 T1
1300 x 1000	3399 T1
1400 x 800	3379 T1
1400 x 900	3384 T1
1400 x 1000	3386 T1
1400 x 1200	3394 T1
1500 x 900	3393 T1
1500 x 1000	3389 T1
1500 x 1200	3395 T1
1600 x 800	3375 T1
1600 x 900	3390 T1
1600 x 1000	3397 T1
1600 x 1200	3392 T1
1700 x 900	3376 T1
1800 x 900	3377 T1
1800 x 1000	3378 T1



BetteFloor Caro

L x W:	Art. No.
900 x 900	7191
1000 x 1000	7211



BetteFloor Corner

L x W:	Art. No.
800 x 1000	6731
900 x 900	5421
1000 x 800	6751
1000 x 1000	5451



BetteUltra

L x W x D	Art. No.
700 x 700 x 25	5719
750 x 750 x 25	5529
800 x 700 x 25	5679
800 x 750 x 25	5669
800 x 800 x 25	5830
850 x 850 x 25	1589
900 x 600 x 25	8600
900 x 700 x 25	5709
900 x 750 x 25	5840
900 x 800 x 25	8750
900 x 850 x 25	1559
900 x 900 x 25	5930



BetteUltra

L x W x D	Art. No.
1000 x 700 x 25	5879
1000 x 750 x 25	1650
1000 x 800 x 25	5490
1000 x 900 x 25	1660
1000 x 1000 x 25	5940



BetteUltra

L x W x D	Art. No.
1050 x 750 x 35	8710
1100 x 700 x 35	8725
1100 x 750 x 35	8727
1100 x 800 x 35	8729
1100 x 900 x 35	8630
1100 x 1000 x 35	8737
1100 x 1100 x 35	8743
1200 x 700 x 35	5979
1200 x 750 x 35	1670
1200 x 800 x 35	1680
1200 x 900 x 35	1260
1200 x 1000 x 35	8660
1200 x 1100 x 35	8664
1200 x 1200 x 35	8720



BetteUltra

L x W x D	Art. No.
1300 x 800 x 35	5786
1300 x 900 x 35	5795
1300 x 1000 x 35	5788
1300 x 1300 x 35	5826
1400 x 700 x 35	5824
1400 x 750 x 35	5814
1400 x 800 x 35	5804
1400 x 900 x 35	5834
1400 x 1000 x 35	5838
1400 x 1400 x 35	5828



BetteUltra

L x W x D	Art. No.
1500 x 700 x 35	5914
1500 x 750 x 35	5924
1500 x 800 x 35	5932
1500 x 900 x 35	5934
1500 x 1000 x 35	5944
1500 x 1500 x 35	5984



BetteUltra

L x W x D	Art. No.
1600 x 700 x 35	5951
1600 x 750 x 35	5953
1600 x 800 x 35	5955
1600 x 900 x 35	5961
1600 x 1000 x 35	5967
1700 x 700 x 35	5992
1700 x 750 x 35	5996
1700 x 800 x 35	5971
1700 x 900 x 35	5998
1700 x 1000 x 35	5806
1800 x 800 x 35	5986
1800 x 900 x 35	5982
1800 x 1000 x 35	5808



BetteUltra with Minimum Support

L x W x D	Art. No.
700 x 700 x 25	5719 T1
750 x 750 x 25	5529 T1
800 x 700 x 25	5679 T1
800 x 750 x 25	5669 T1
800 x 800 x 25	5830 T1
850 x 850 x 25	1589 T1
900 x 600 x 25	8600 T1
900 x 700 x 25	5709 T1
900 x 750 x 25	5840 T1
900 x 800 x 25	8750 T1
900 x 850 x 25	1559 T1
900 x 900 x 25	5930 T1



BetteUltra with Minimum Support

L x W x D	Art. No.
1000 x 700 x 25	5879 T1
1000 x 750 x 25	1650 T1
1000 x 800 x 25	5490 T1
1000 x 900 x 25	1660 T1
1000 x 1000 x 25	5940 T1



BetteUltra with Minimum Support

L x W x D	Art. No.
1050 x 750 x 35	8710 T1
1100 x 700 x 35	8725 T1
1100 x 750 x 35	8727 T1
1100 x 800 x 35	8729 T1
1100 x 900 x 35	8630 T1
1100 x 1000 x 35	8737 T1
1100 x 1100 x 35	8743 T1
1200 x 700 x 35	5979 T1
1200 x 750 x 35	1670 T1
1200 x 800 x 35	1680 T1
1200 x 900 x 35	1260 T1
1200 x 1000 x 35	8660 T1
1200 x 1100 x 35	8664 T1
1200 x 1200 x 35	8720 T1

All dimensions in mm

Product overview shower trays



BetteUltra with Minimum Support

L x W x D	Art. No.
1300 x 800 x 35	5786 T1
1300 x 900 x 35	5795 T1
1300 x 1000 x 35	5788 T1
1300 x 1300 x 35	5826 T1
1400 x 700 x 35	5824 T1
1400 x 750 x 35	5814 T1
1400 x 800 x 35	5804 T1
1400 x 900 x 35	5834 T1
1400 x 1000 x 35	5838 T1
1400 x 1400 x 35	5828 T1



BetteUltra with Minimum Support

L x W x D	Art. No.
1500 x 700 x 35	5914 T1
1500 x 750 x 35	5924 T1
1500 x 800 x 35	5932 T1
1500 x 900 x 35	5934 T1
1500 x 1000 x 35	5944 T1
1500 x 1500 x 35	5984 T1
1600 x 700 x 35	5951 T1
1600 x 750 x 35	5953 T1
1600 x 800 x 35	5955 T1
1600 x 900 x 35	5961 T1
1600 x 1000 x 35	5967 T1



BetteUltra with Minimum Support

L x W x D	Art. No.
1700 x 700 x 35	5992 T1
1700 x 750 x 35	5996 T1
1700 x 800 x 35	5971 T1
1700 x 900 x 35	5998 T1
1700 x 1000 x 35	5806 T1
1800 x 800 x 35	5986 T1
1800 x 900 x 35	5982 T1
1800 x 1000 x 35	5808 T1



BetteSupra

L x W x D	Art. No.
700 x 700 x 65	5720
750 x 700 x 65	5360
750 x 750 x 65	5530
800 x 700 x 65	5680
800 x 750 x 65	5670
800 x 800 x 65	5820
850 x 700 x 65	5780
850 x 750 x 65	1570
850 x 850 x 65	1590
900 x 600 x 65	8610
900 x 700 x 65	5710
900 x 750 x 65	5770
900 x 800 x 65	5970
900 x 850 x 65	1560
900 x 900 x 65	5920



BetteSupra

L x W x D	Art. No.
1000 x 700 x 65	5880
1000 x 750 x 65	5550
1000 x 800 x 65	5520
1000 x 900 x 65	5380
1000 x 1000 x 65	5620
1050 x 750 x 65	8690
1100 x 700 x 65	8726
1100 x 750 x 65	8728
1100 x 800 x 65	8730
1100 x 900 x 65	8640
1100 x 1000 x 65	8738
1100 x 1100 x 65	8744



BetteSupra

L x W x D	Art. No.
1200 x 700 x 65	5980
1200 x 750 x 65	5570
1200 x 800 x 65	5870
1200 x 900 x 65	1690
1200 x 1000 x 65	8670
1200 x 1100 x 65	8665
1200 x 1200 x 65	5630
1300 x 800 x 65	5787
1300 x 900 x 65	5796
1300 x 1000 x 65	5789
1300 x 1300 x 65	5827



BetteSupra

L x W x D	Art. No.
1400 x 700 x 65	5825
1400 x 750 x 65	5815
1400 x 800 x 65	5805
1400 x 900 x 65	5835
1400 x 1000 x 65	5839
1400 x 1400 x 65	5829
1500 x 700 x 65	5915
1500 x 750 x 65	5925
1500 x 800 x 65	5933
1500 x 900 x 65	5935
1500 x 1000 x 65	5945
1500 x 1500 x 65	5985



BetteSupra

L x W x D	Art. No.
1600 x 700 x 65	5952
1600 x 750 x 65	5954
1600 x 800 x 65	5956
1600 x 900 x 65	5962
1600 x 1000 x 65	5968
1700 x 700 x 65	5993
1700 x 750 x 65	5997
1700 x 800 x 65	5972
1700 x 900 x 65	5999
1700 x 1000 x 65	5807
1800 x 800 x 65	5987
1800 x 900 x 65	5983
1800 x 1000 x 65	5809



BetteQuinta

L x W x D	Art. No.
700 x 700 x 150	5700
750 x 700 x 150	5370
750 x 750 x 150	5540
800 x 700 x 150	5690
800 x 750 x 150	5650
800 x 800 x 150	5800
850 x 700 x 150	5790
850 x 750 x 150	1910
850 x 850 x 150	1920
900 x 600 x 150	8620
900 x 700 x 150	5730
900 x 750 x 150	5750
900 x 800 x 150	5950
900 x 850 x 150	1900
900 x 900 x 150	5900

Product overview shower trays



BetteQuinta

L x W x D	Art. No.
1000 x 700 x 150	5890
1000 x 750 x 150	5560
1000 x 800 x 150	5500
1000 x 900 x 150	5390
1000 x 1000 x 150	5600
1050 x 750 x 150	8700
1100 x 800 x 150	8740
1100 x 900 x 150	8650



BetteQuinta

L x W x D	Art. No.
1200 x 700 x 150	5990
1200 x 750 x 150	5580
1200 x 800 x 150	5850
1200 x 900 x 150	1290
1200 x 1000 x 150	8680
1200 x 1200 x 150	5640



≤ 900 mm

BetteDelta

L x W x D	Art. No.
800 x 750 x 280	5660
800 x 800 x 280	5810
900 x 700 x 280	5740
900 x 750 x 280	5760
900 x 800 x 280	5960
900 x 900 x 280	5910
1000 x 800 x 280	5510
1000 x 1000 x 280	5610
1200 x 800 x 280	5860



≥ 1000 mm



BetteCaro 35 mm, same shank length

L x W x D	Art. No.
800 x 800 x 35	5319
900 x 900 x 35	7189
1000 x 1000 x 35	7219



BetteCaro 35 mm, different shank length

L x W x D	Art. No.
750 x 900 x 35	8019
800 x 900 x 35	6704
900 x 750 x 35	8059
900 x 800 x 35	6710



BetteCaro 65 mm, same shank length

L x W x D	Art. No.
800 x 800 x 65	5320
900 x 900 x 65	7190
1000 x 1000 x 65	7220



BetteCaro 65 mm, different shank length

L x W x D	Art. No.
750 x 900 x 65	8020
800 x 900 x 65	6705
900 x 750 x 65	8060
900 x 800 x 65	6711



BetteCorner 35 mm, same shank length

L x W x D	Art. No.
800 x 800 x 35	5399
900 x 900 x 35	5429
1000 x 1000 x 35	5459
1200 x 1200 x 35	5467



BetteCorner 35 mm, different shank length

L x W x D	Art. No.
750 x 900 x 35	8119
800 x 900 x 35	5401
800 x 1000 x 35	6737
800 x 1200 x 35	5431
900 x 750 x 35	8159
900 x 800 x 35	5404
900 x 1000 x 35	5461
900 x 1200 x 35	5471



BetteCorner 35 mm, different shank length

L x W x D	Art. No.
1000 x 800 x 35	6743
1000 x 900 x 35	5464
1200 x 800 x 35	5434
1200 x 900 x 35	5475



BetteCorner 65 mm, same shank length

L x W x D	Art. No.
800 x 800 x 65	5400
900 x 900 x 65	5430
1000 x 1000 x 65	5460
1200 x 1200 x 65	5468




BetteCorner 65 mm, different shank length

L x W x D	Art. No.
750 x 900 x 65	8120
800 x 900 x 65	5402
800 x 1000 x 65	6738
800 x 1200 x 65	5432
900 x 750 x 65	8160
900 x 800 x 65	5405
900 x 1000 x 65	5462
900 x 1200 x 65	5472
1000 x 800 x 65	6744
1000 x 900 x 65	5465
1200 x 800 x 65	5435
1200 x 900 x 65	5476

All dimensions in mm

Product overview washbasins



BetteAqua Built-In

L x W; Internal depth
 600 x 495; 80
 600 x 495; 80
 800 x 495; 80
 800 x 495; 80
 1400 x 495; 80
 1400 x 495; 80
 1400 x 495; 80
 Rim height:
 8

Art. No.
 A050
 A050 HLW1
 A048
 A048 HLW1
 A046
 A046 HLW1
 A046 HLW2



BetteAqua Wall Mounted

L x W; Internal depth
 600 x 495; 80
 600 x 495; 80
 800 x 495; 80
 800 x 495; 80
 1400 x 495; 80
 1400 x 495; 80
 1400 x 495; 80
 Height:
 125

Art. No.
 A056
 A056 HLW1
 A054
 A054 HLW1
 A052
 A052 HLW1
 A052 HLW2



BetteArt Counter Top

L x W x H; Internal depth
 300 x 400 x 90; 80
 600 x 400 x 110; 100
 800 x 400 x 110; 100

Art. No.
 A180
 A181
 A182



BetteArt Monolith

L x W; Internal depth
 600 x 400; 100
 Height:
 900

Art. No.
 A183



BetteComodo Built-In

L x W; Internal depth
 600 x 495; 120
 600 x 495; 120
 800 x 495; 120
 800 x 495 x 120
 Height:
 8

Art. No.
 A200
 A200 HLW1
 A201
 A201 HLW1



BetteComodo Undermounted

L x W; Internal depth
 574 x 380; 120
 774 x 380; 120

Art. No.
 A217
 A218



BetteComodo Undermounted with overflow

L x W; Internal depth
 574 x 380; 120
 774 x 380; 120


Art. No.
 A217 mUel
 A218 mUel



BetteComodo Wall Mounted

L x W; Internal depth
 600 x 495; 120
 600 x 495; 120
 800 x 495; 120
 800 x 495; 120
 Height:
 140

Art. No.
 A210
 A210 HLW1
 A211
 A211 HLW1



BetteCraft Shell

L x W; Internal depth
 350 x 350; 120
 450 x 450; 120
 Height:
 120

Art. No.
 A240
 A241



BetteLoft Built-In

L x W; Internal depth
 800 x 495; 100
 800 x 495; 100
 Height:
 8

Art. No.
 A230
 A230 HLW1



BetteLoft Ornament Wall Mounted, 1 row

L x W x H; Internal depth
 825 x 525 x 125; 100
 825 x 525 x 420; 100

Art. No.
 A230 SWV1A
 A230 SWV1A,HLW1



BetteLoft Ornament Wall Mounted, 4 row

L x W x H; Internal depth
 815 x 510 x 420; 100
 815 x 510 x 420; 100

Art. No.
 A230 SWV4A
 A230 SWV4A,HLW1

Product overview washbasins



BetteLoft Undermounted

L x W; Internal depth
 740 x 386; 100


Art. No.
 A231



BetteLoft Undermounted with overflow

L x W; Internal depth
 740 x 386; 100

Art. No.
 A231 mUel



BetteLux Built-In

L x W; Internal depth
 600 x 495; 120
 600 x 495; 120
 800 x 495; 120
 800 x 495; 120
 Height:
 8


Art. No.
 A160
 A160 HLW1
 A161
 A161 HLW1



BetteLux Oval Couture

L x W; Internal depth
 500 x 500; 100
 500 x 500; 100
 Height:
 908

Art. No.
 A220 TX
 A220 HLW1,TX



BetteLux Oval Built-In

L x W; Internal depth
 500 x 500; 100
 500 x 500; 100
 Height:
 8

Art. No.
 A220
 A220 HLW1



BetteLux Shape

L x W; Internal depth
 600 x 495; 120
 600 x 495; 120
 800 x 495; 120
 800 x 495; 120
 1000 x 495; 120
 1000 x 495; 120
 Height:
 899


Art. No.
 A170
 A170 HLW1
 A171
 A171 HLW1
 A172
 A172 HLW1



BetteLux Wall Mounted

L x W; Internal depth
 600 x 495; 120
 600 x 495; 120
 800 x 495; 120
 800 x 495; 120
 Height:
 140

Art. No.
 A166
 A166 HLW1
 A167
 A167 HLW1



BetteOne Built-In

L x W; Internal depth
 530 x 530; 130
 530 x 530; 130
 700 x 530; 130
 700 x 530; 130
 900 x 530; 130
 900 x 530; 130
 Height:
 8

Art. No.
 A126
 A126 HLW1
 A127
 A127 HLW1
 A128
 A128 HLW1



BetteOne Undermounted

L x W; Internal depth
 434 x 416; 130
 587 x 408; 130
 767 x 400; 130

Art. No.
 A135
 A136
 A137



BetteOne Wall Mounted

L x W; Internal depth
 530 x 530; 130
 530 x 530; 130
 700 x 530; 130
 700 x 530; 130
 900 x 530; 130
 900 x 530; 130
 Height:
 140

Art. No.
 A131
 A131 HLW1
 A132
 A132 HLW1
 A133
 A133 HLW1



BetteOne Wall Mounted Double

L x W; Internal depth
 1400 x 530; 130
 1400 x 530; 130
 Height:
 140

Art. No.
 A142
 A142 HLW2

All dimensions in mm
 HLW1 = 1 Taphole
 HLW2 = 2 Tapholes

Copyright:

All Image and trademark rights reserved.
Program and technical changes and errors
excepted.
The colours of individual illustrations may vary,
due to the printing process.

Bette GmbH & Co. KG
Heinrich-Bette-Straße 1
33129 Delbrück
Germany
T +49 5250 511-0
F +49 5250 511-130
international@bette.de

www.my-bette.com

EN 06/2019 - Subject to model changes, changes and tolerances due to technical reasons, printing and other errors. For technical reasons, the printed colours may vary slightly from the original.